




AXORA | SPINE Series LED track light

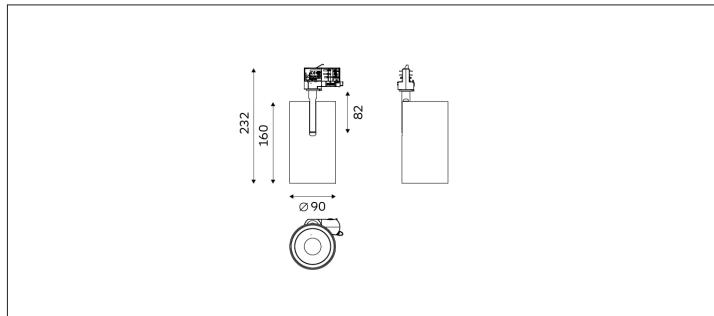

| | | |
|--------------------------------|--------------------------|--|
| Light Distribution | AX-TL-SP-36W-090 | |
| Colour Temperature | 2700/3000/3500/4000K | |
| Colour Rendition Index | CRI 90 | |
| Optics | LENS | |
| Beam Angle | 18D/25D/38D/51D | |
| Track Phases | 1 Circuit/ 3 Circuit | |
| Connected Load | 36.5W | |
| Luminous Flux Of The Luminaire | 4573lm | |
| Luminaire Efficacy | 125lm/W | |
| Colour Deviation | SDCM<5 | |
| Light Source | LED | |
| LED Type | COB | |
| Dimming Method | Triac/1-10V/ Dali | |
| Cover Material | Aluminum | |
| Body Material | Aluminum | |
| IP Rating | IP20 | |
| Housing Colour | Sandy White/ Sandy Black | |
| Weight | 0.8Kg | |
| Technical Region | 220-240V 50/60Hz | |

| Light Beam Table | | |
|------------------|-------|------|
| H(M) | E(lx) | D(M) |
| 1.0 | 23801 | 0.44 |
| 2.0 | 5950 | 0.89 |
| 3.0 | 2644 | 1.33 |
| 4.0 | 1487 | 1.78 |
| 5.0 | 952 | 2.22 |

A range of sizes and wattage options to accommodate various environmental needs. Also can be 48V magnetic and AC220V. A novel proportion design that provides even light distribution and optimal lighting effects. Have different optical accessories to customize their lighting effects.