




AXORA | DENSO Series LED Recessed Downlight

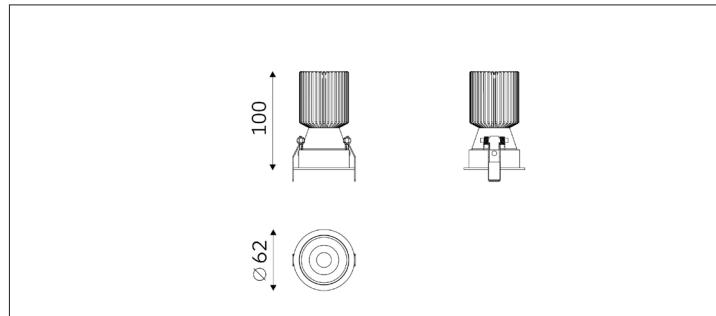

Light Distribution	AX-DL-DE-15W-055	
Colour Temperature	2700/3000/3500/4000K	H(M)
Colour Rendition Index	CRI 90	E(lx)
Optics	LENS	D(M)
Beam Angle	20D/25D/36D/47D	25°
Cut out	55mm	1.0 5027.62 0.45
Connected Load	15W	2.0 1256.91 0.89
Luminous Flux Of The Luminaire	1053lm	3.0 558.62 1.34
Luminaire Efficacy	70lm/W	4.0 314.23 1.78
Colour Deviation	SDCM<5	5.0 201.10 2.23
Light Source	LED	
LED Type	COB	
Dimming Method	Triac/1-10V/ Dali	
Cover Material	Aluminum	
Body Material	Aluminum	
IP Rating	IP20	
Housing Colour	Sandy White/ Sandy Black	
Weight	0.3Kg	
Technical Region	220-240V 50/60Hz	

Light Beam Table

H(M)	E(lx)	D(M)
1.0	5027.62	0.45
2.0	1256.91	0.89
3.0	558.62	1.34
4.0	314.23	1.78
5.0	201.10	2.23

Small sizes but can be high power.
 Have fixed and adjustable 2 versions, each version have 4 sizes and 4 power for selected, can almost meet all the requirements.
 With anti-glare reflector, created a comfortable environment.