

Report No.: AX_TL_FL_11W_045

Test Time: 2023-09-13 15:47

Luminaire Property

Luminaire Category: Bridgelux V8 4000K CRI90

Voltage: 221.8 V

Current: 0.052 A

Power: 10.80 W

Power Factor: 0.928

Photometric Results

CIE Class: Direct

Measurement Flux: 910.5 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H29.8

Vertical Diffuse Angle(50%): V29.8

Luminaire Efficacy Rating (LER): 84

Max. Intensity: 3330.82 cd

Total Rated Lamp Lumens: 910.5 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 3330.81 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

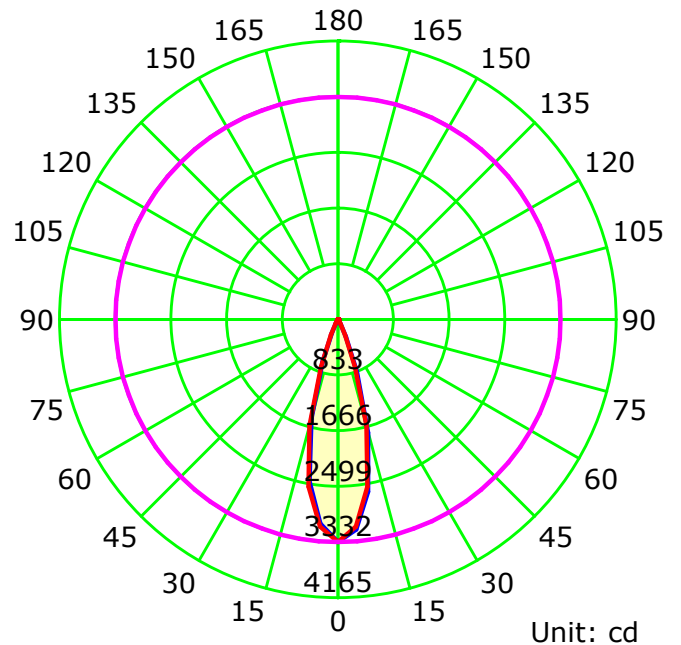

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

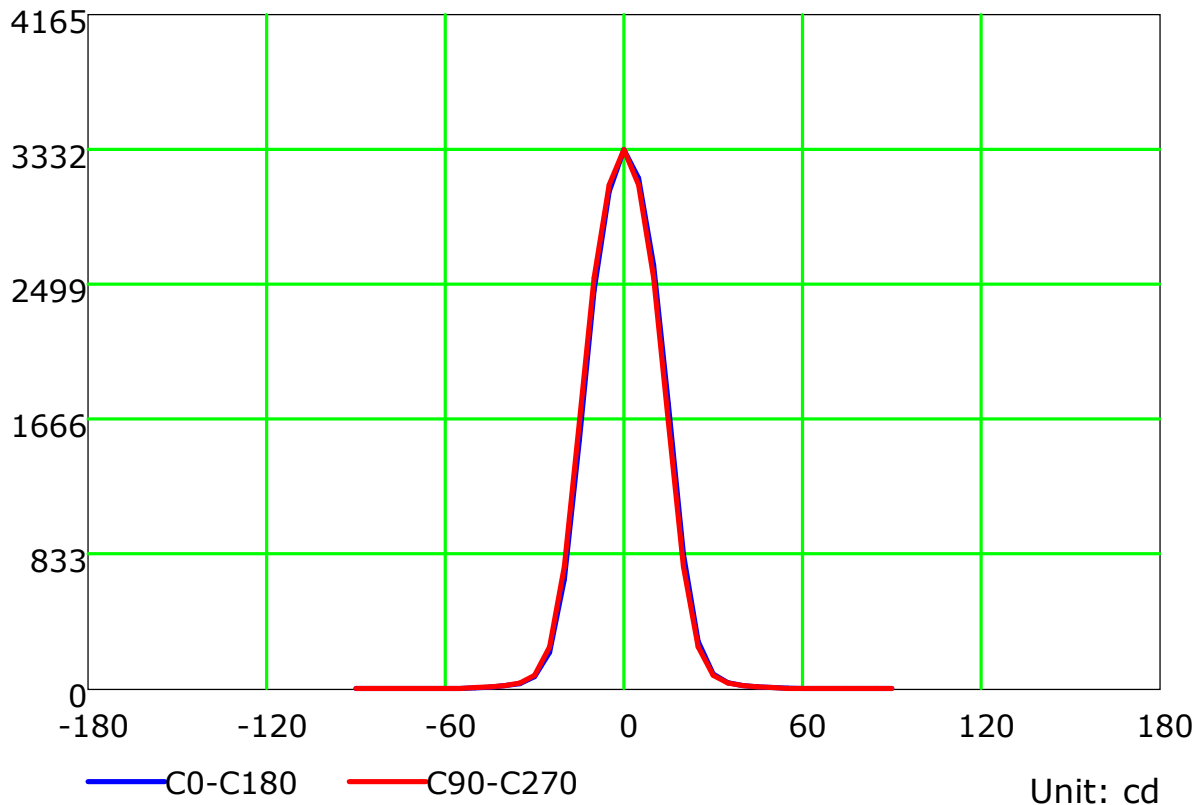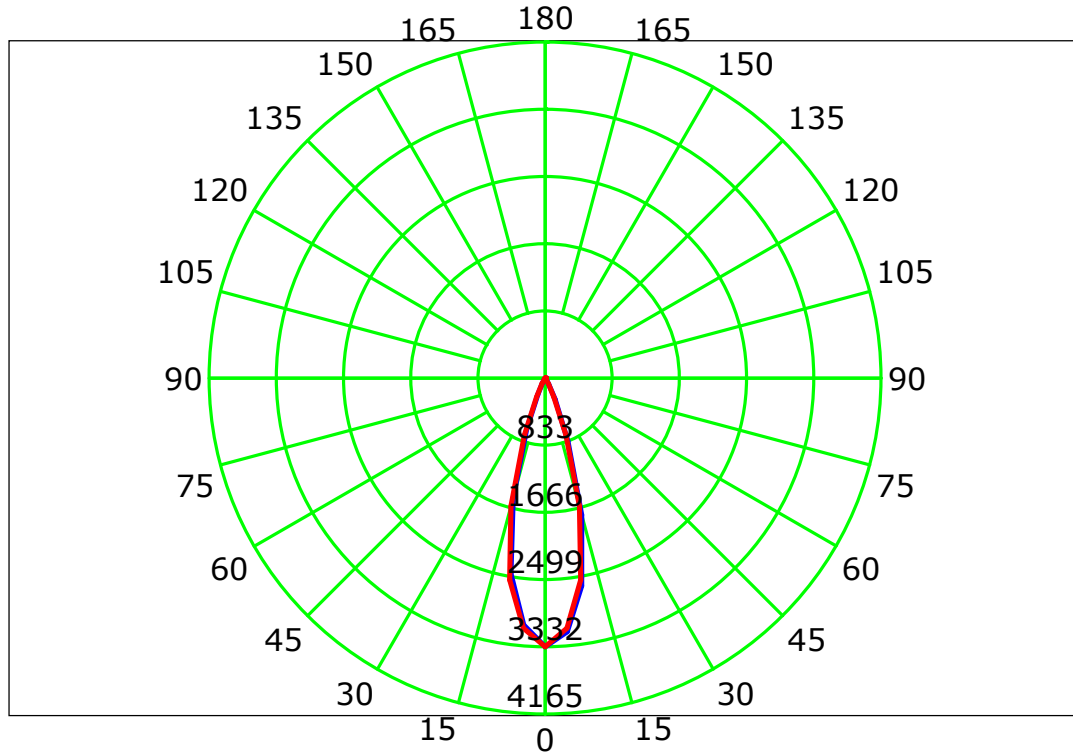

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Isocandela (rectangle)

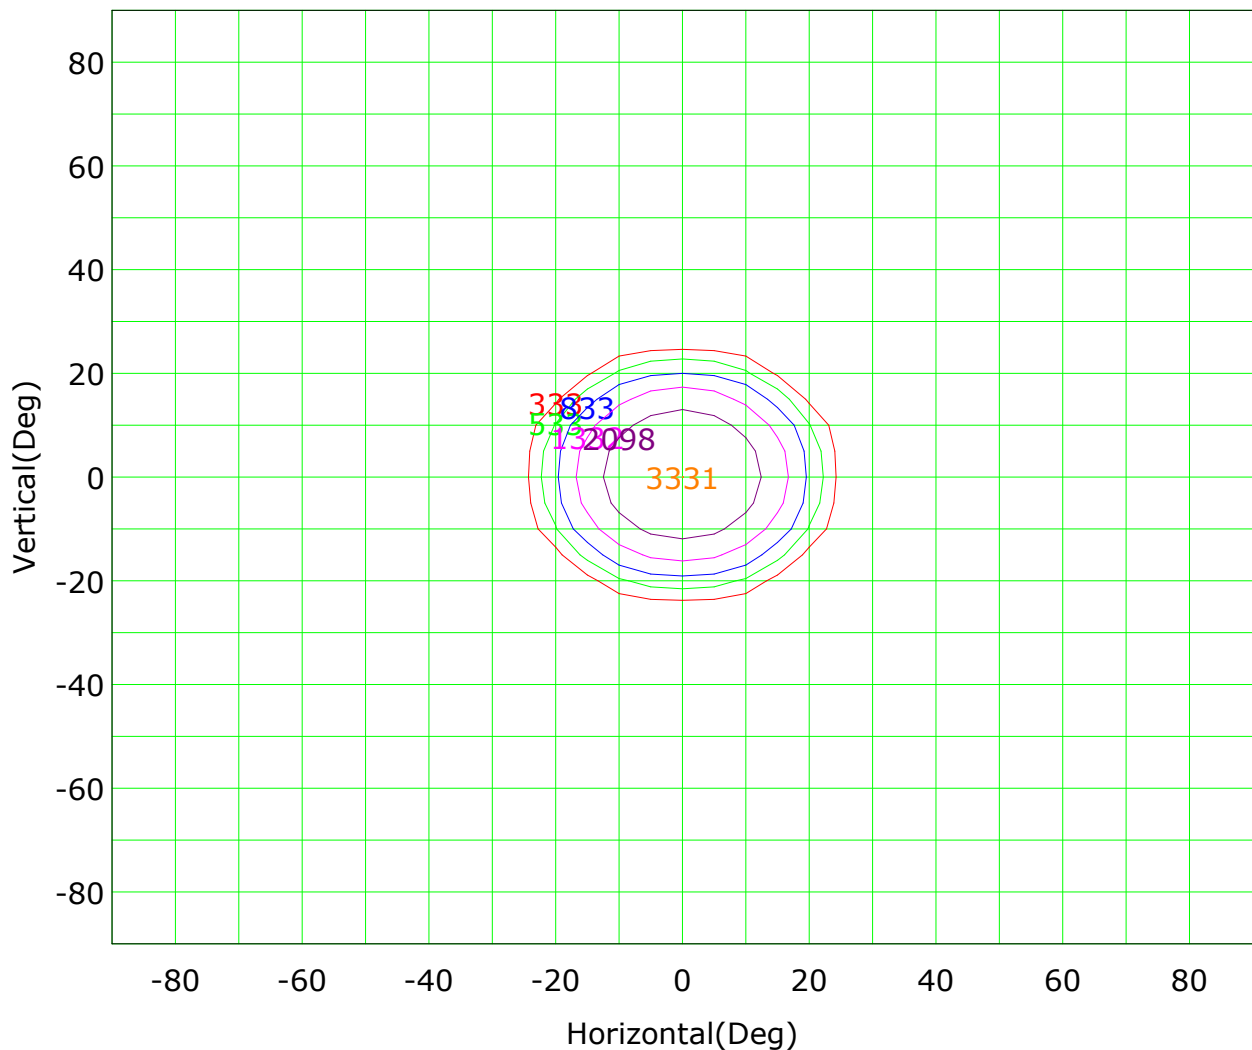

Imax (100%): 3331 cd

(10%): 333 cd	(16%): 533 cd
(25%): 833 cd	(40%): 1332 cd
(63%): 2098 cd	(100%): 3331 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

IsoLux Plot

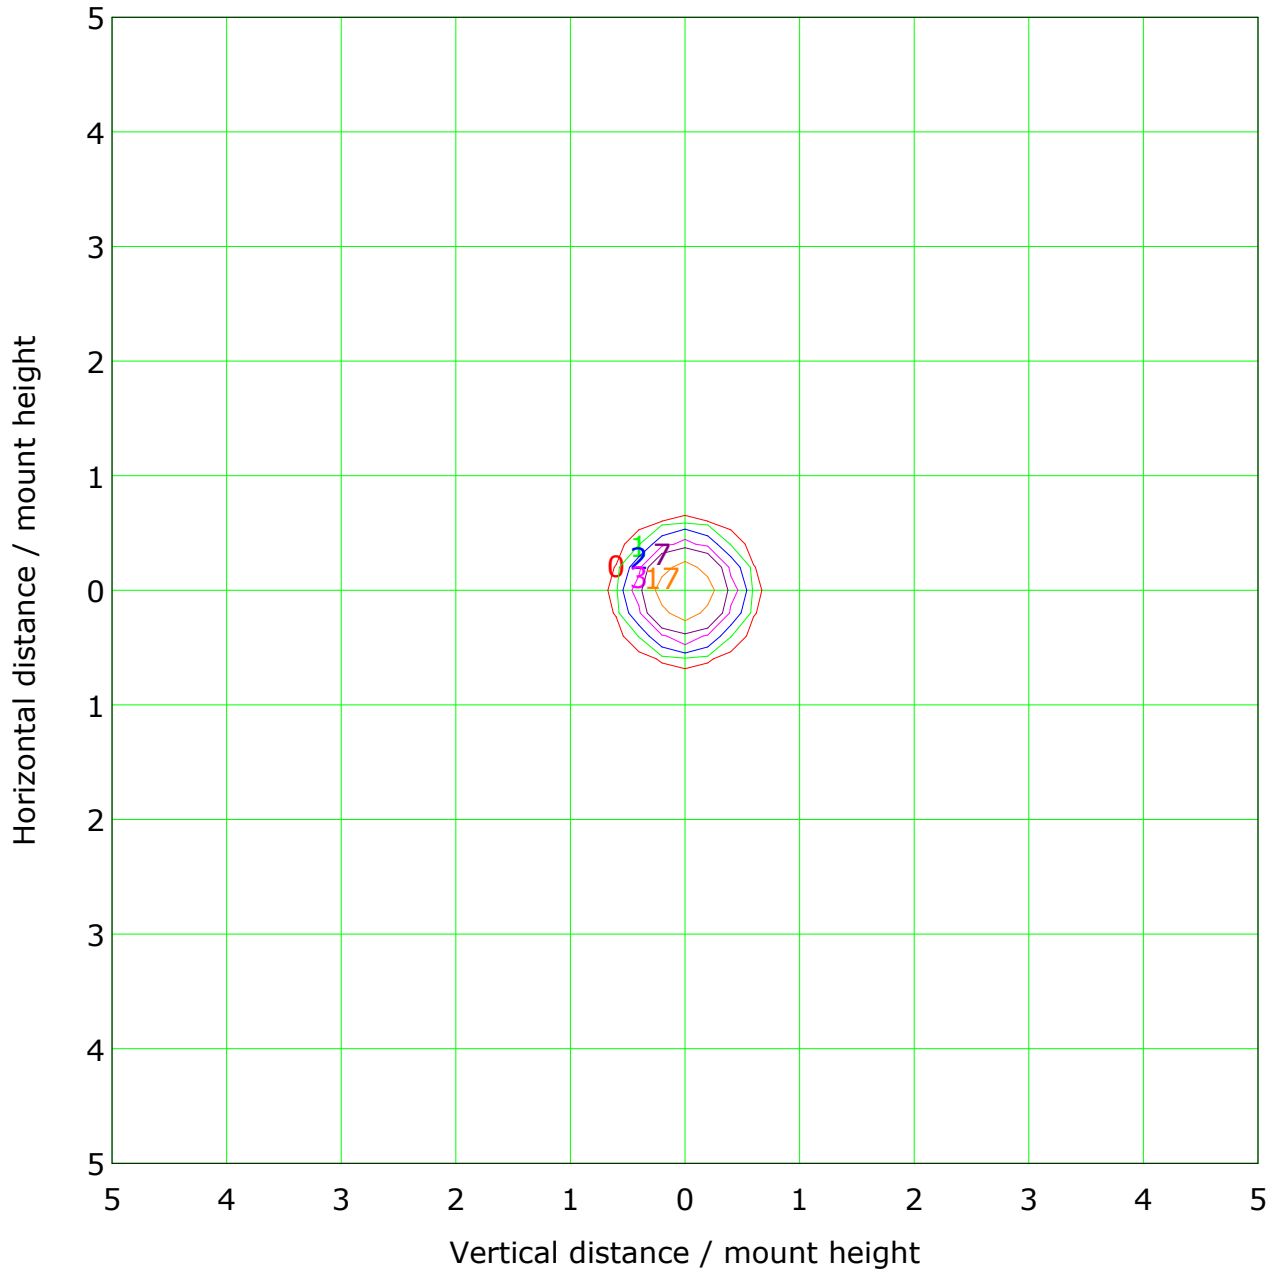

Mounting Height: 10m		Max Lux(100%): 33 lx	
— (1%):	0 lx	— (2%):	1 lx
— (5%):	2 lx	— (10%):	3 lx
— (20%):	7 lx	— (50%):	17 lx
— (100%):	33 lx		

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

Illuminance at a Distance

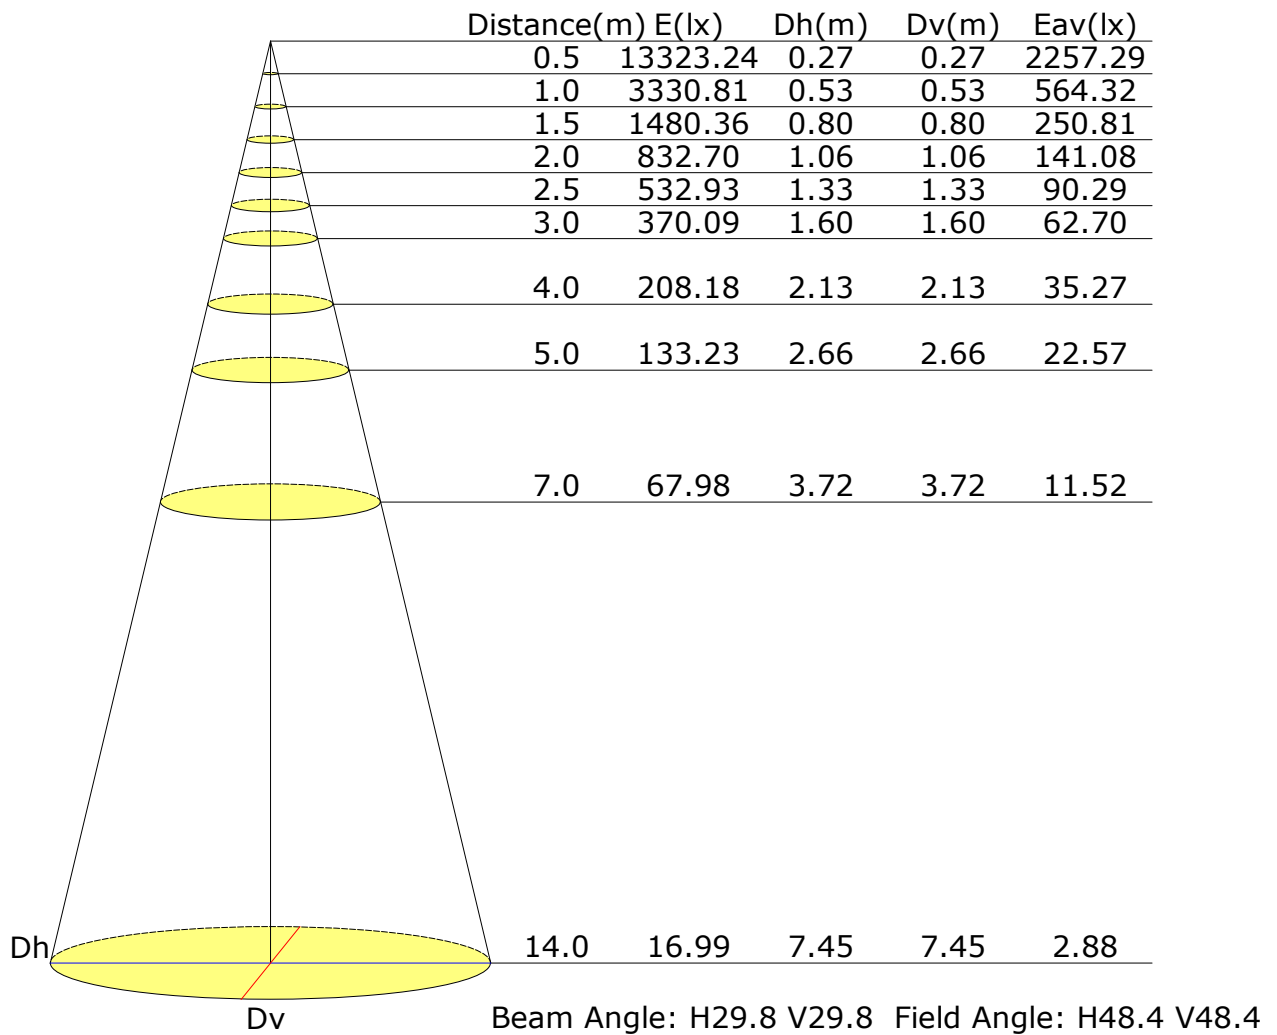

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

Vertical IsoLux Plot

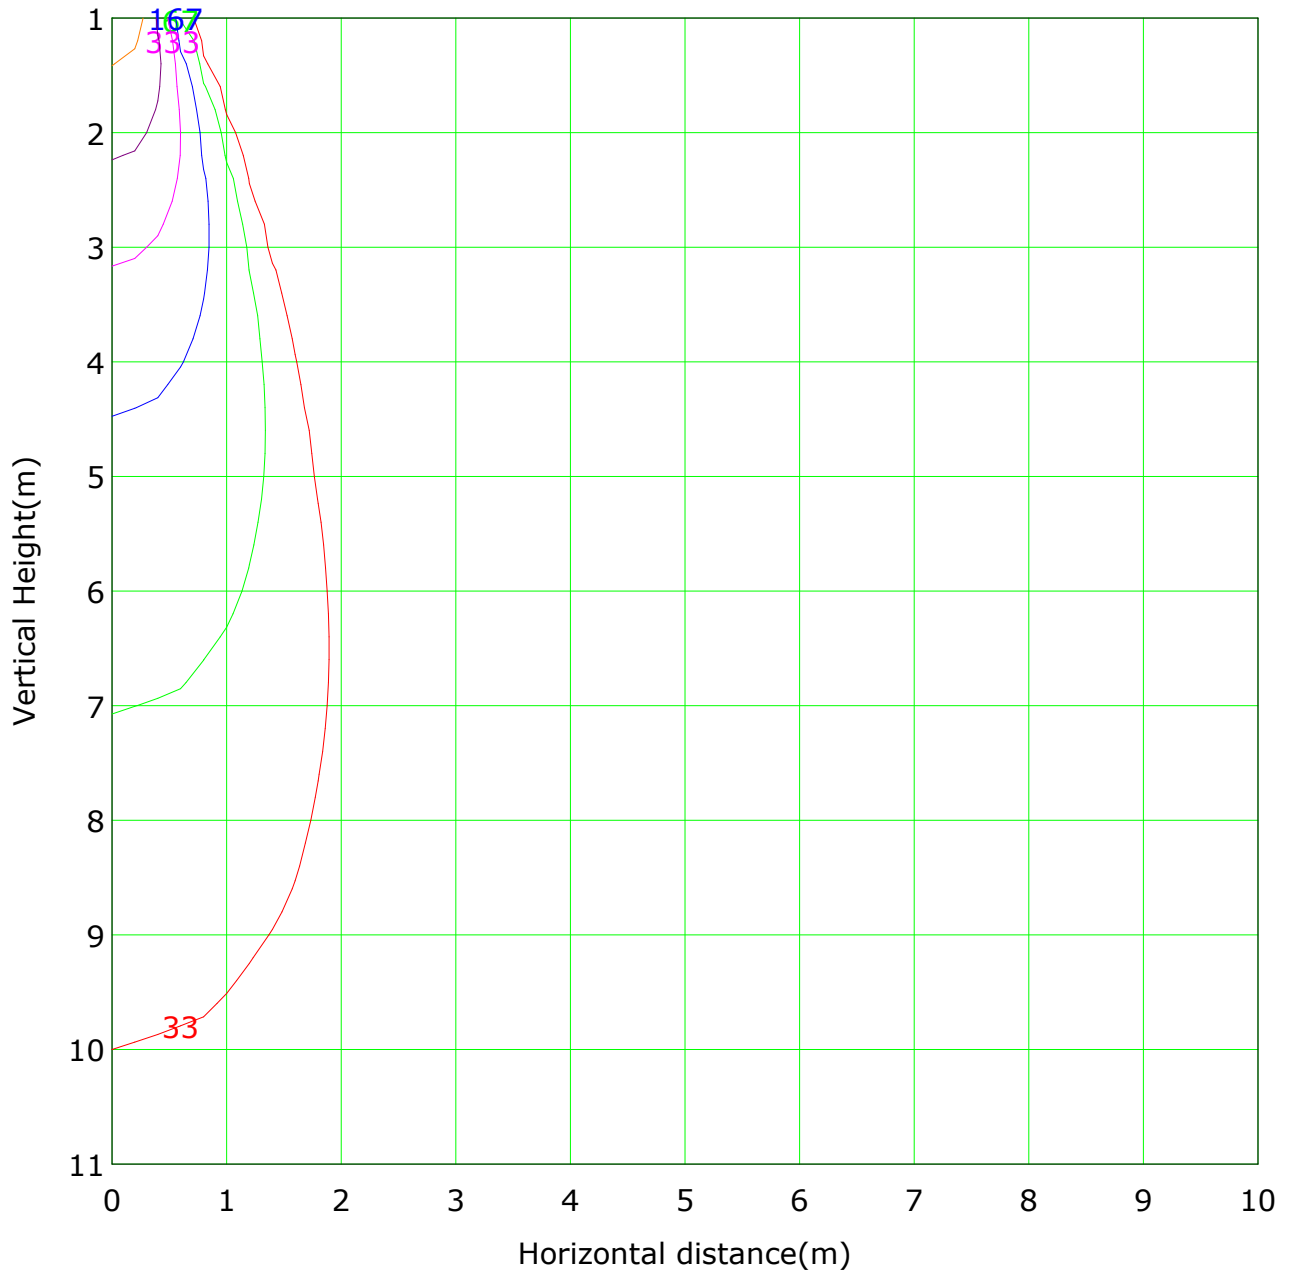


Lowest(m): 1m Highest(m): 11 Max Lux: 3331

(1%): 33 lx	(2%): 67 lx
(5%): 167 lx	(10%): 333 lx
(20%): 666 lx	(50%): 1665 lx
(100%): 3331 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

The average illuminance effective figure

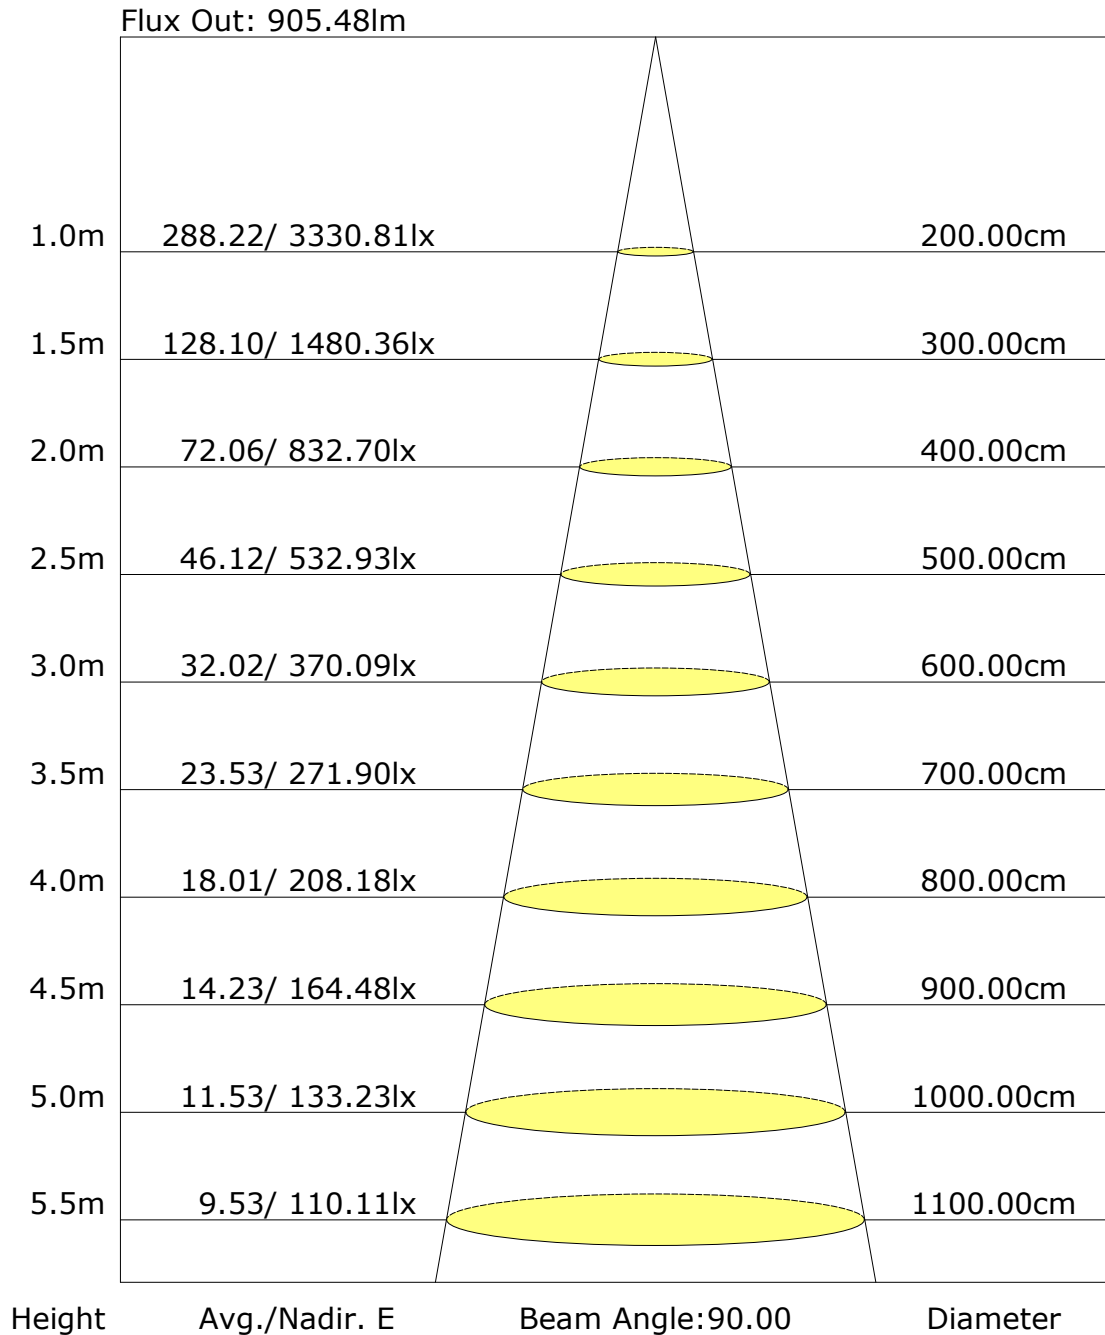

[illegible]

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Unit: cd

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector: