




AXORA | VECTOR Series LED Recessed Downlight

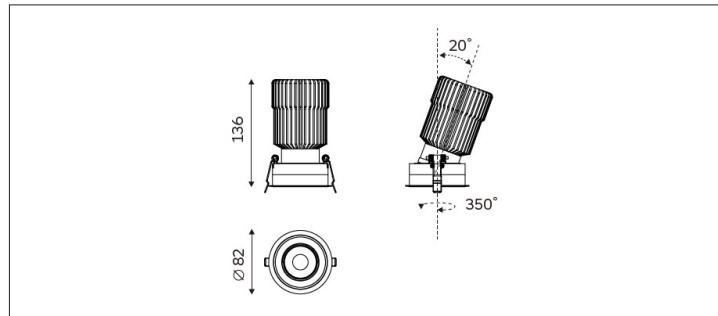

Light Distribution	AX-DL-VE-32W-075			
Colour Temperature	2700/3000/3500/4000K	h(m)	E(lx)	
Colour Rendition Index	CRI 90	1.0	8821.25	
Optics	Lens	2.0	2205.31	
Beam Angle	32D/40D/48D/58D	3.0	980.14	
Cut Out	75mm	4.0	551.33	
Connected Load	32W	5.0	352.85	
Luminous Flux Of The Luminaire	3653lm	32°		
Luminaire Efficacy	114.16lm/W	1.0	0.58	
Colour Deviation	SDCM<5	2.0	1.15	
Light Source	LED	3.0	1.73	
LED Type	COB	4.0	2.30	
Dimming Method	Triac/0-10V/ Dali	5.0	2.88	
Cover Material	Aluminum	Widely used in star hotels, high-end clubs, homes, offices and stores, Large shopping malls, chain stores and so on.		
Body Material	Aluminum			
IP Rating	IP20			
Housing Colour	Sandy White/ Sandy Black			
Weight	0.7Kg			
Technical Region	220-240V 50/60Hz			