
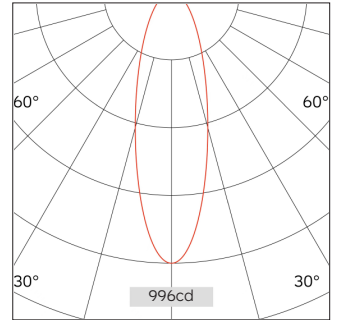


AXORA | FLUX Series Diffused Linear Lighting Module

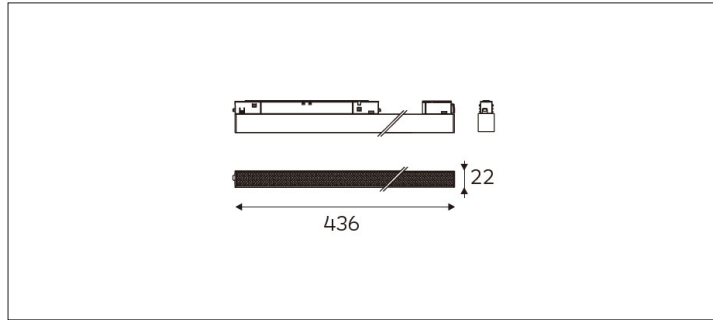

Light Distribution	AX-MG-FL-DL-20W-220
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	PC Cover
Beam Angle	wide flood 90°
Track	Low Voltage Track
Connected Load	20W
Luminous Flux Of The Luminaire	1831lm
Luminaire Efficacy	93lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	SMD
Dimming Method	1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Matt White/ Matt Black
Weight	0.5Kg
Technical Region	Input 48V

Light Beam Talbe

h(m)	E(lx)	D(m)
		90°
1.0	996.14	1.82
2.0	249.04	3.63
3.0	110.68	5.45
4.0	62.26	7.26
5.0	39.85	9.08

Widely used in commercial applications including fashion stores, furniture exhibitions, branded boutiques, vehicle display halls, jewelry galleries, high-end hotels, retail chains, museums, display windows, checkout counters, and other areas needing focused accent lighting.