

Report No.: AX- DL-BA-10W-055

Test Time: 2023-09-04 10:20

## Luminaire Property

Luminaire Category:

Voltage: 220.9 V

Power: 11.60 W

Current: 0.056 A

Power Factor: 0.932

## Photometric Results

CIE Class: Direct

Measurement Flux: 734 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H39.9

Vertical Diffuse Angle(50%): V39.9

Luminaire Efficacy Rating (LER): 63

Max. Intensity: 1466.02 cd

Total Rated Lamp Lumens: 734.0 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 1457.94 cd

Pos of Max. Intensity: H0 V5

Picture Of Luminaire



Luminous Intensity Distribution Curve

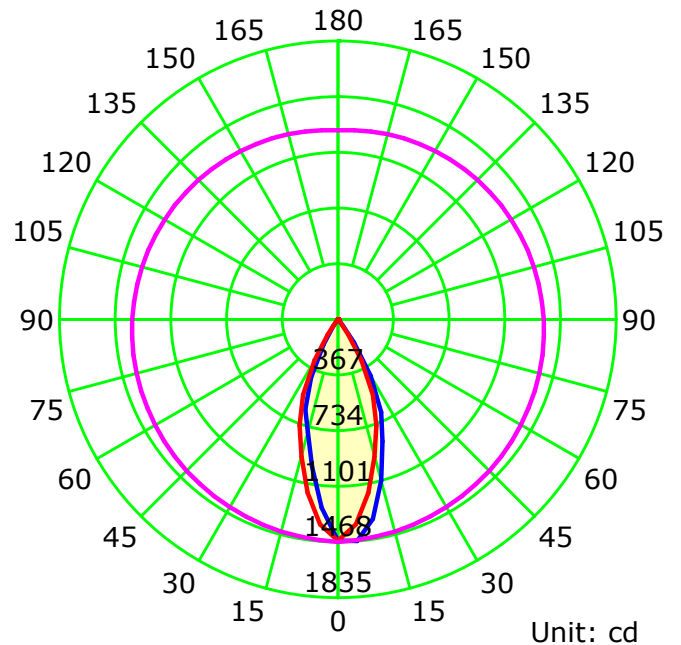

— C0-C180 — C90-C270 — G5

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

## Luminous Intensity Distribution Curve

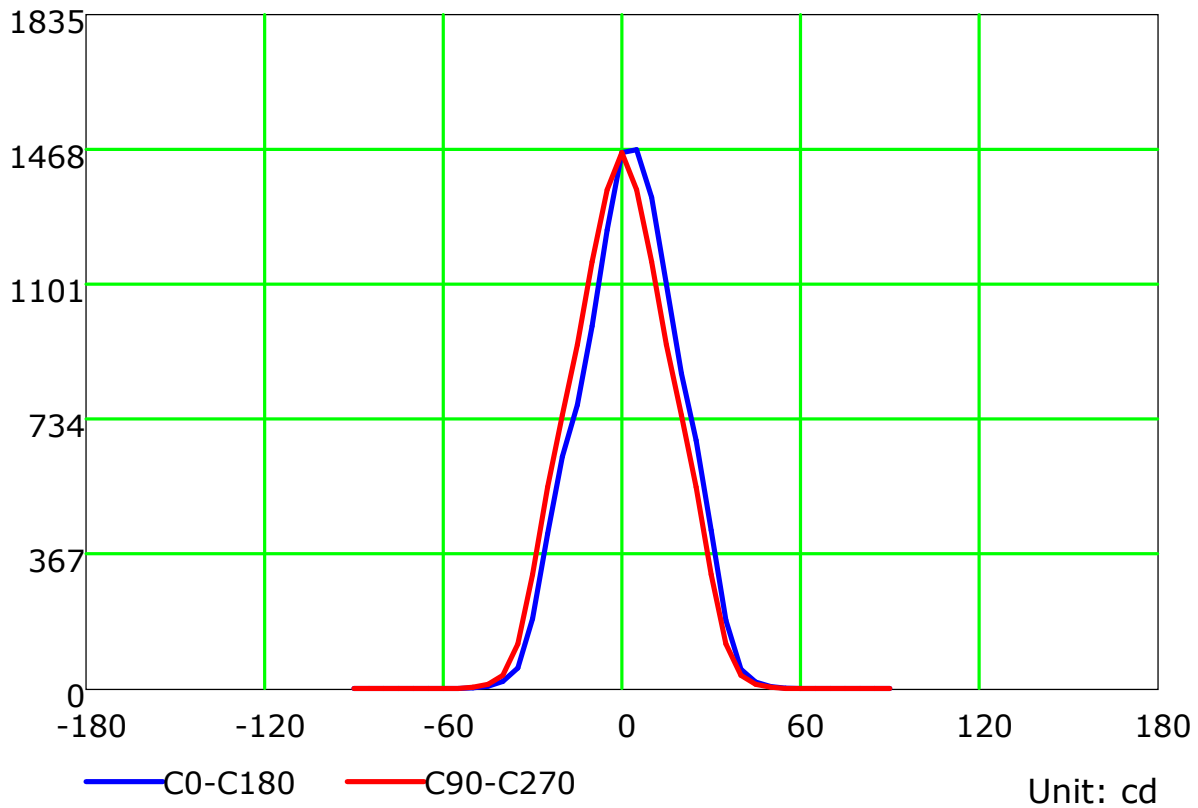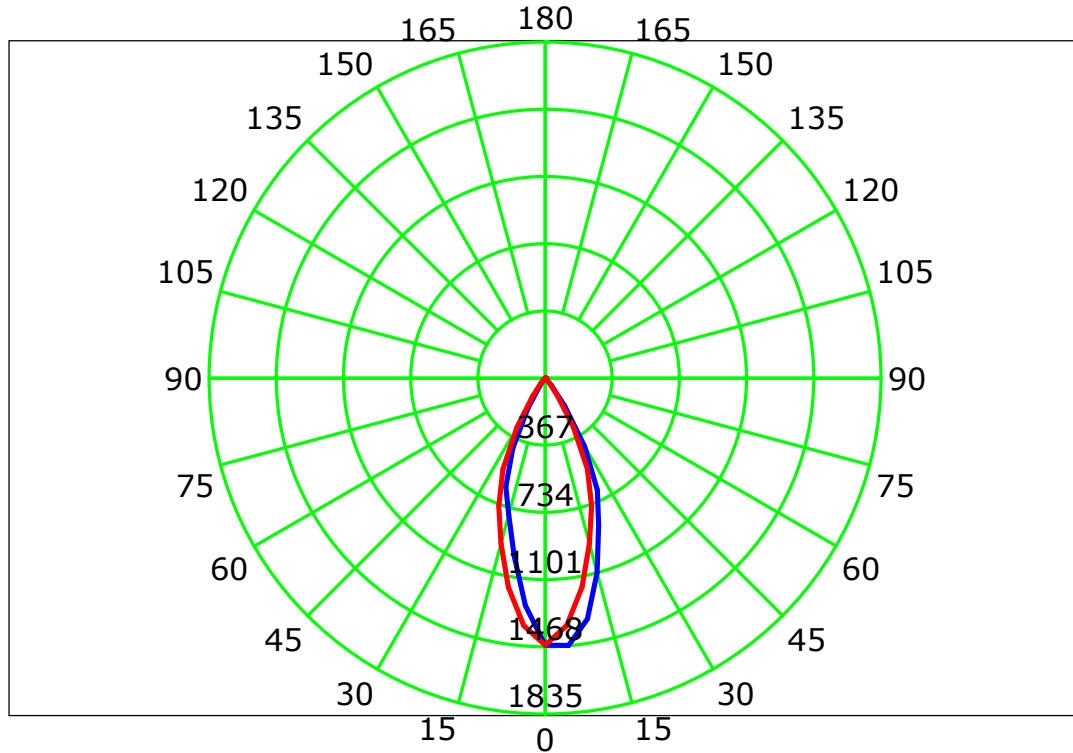

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

## Isocandela (rectangle)

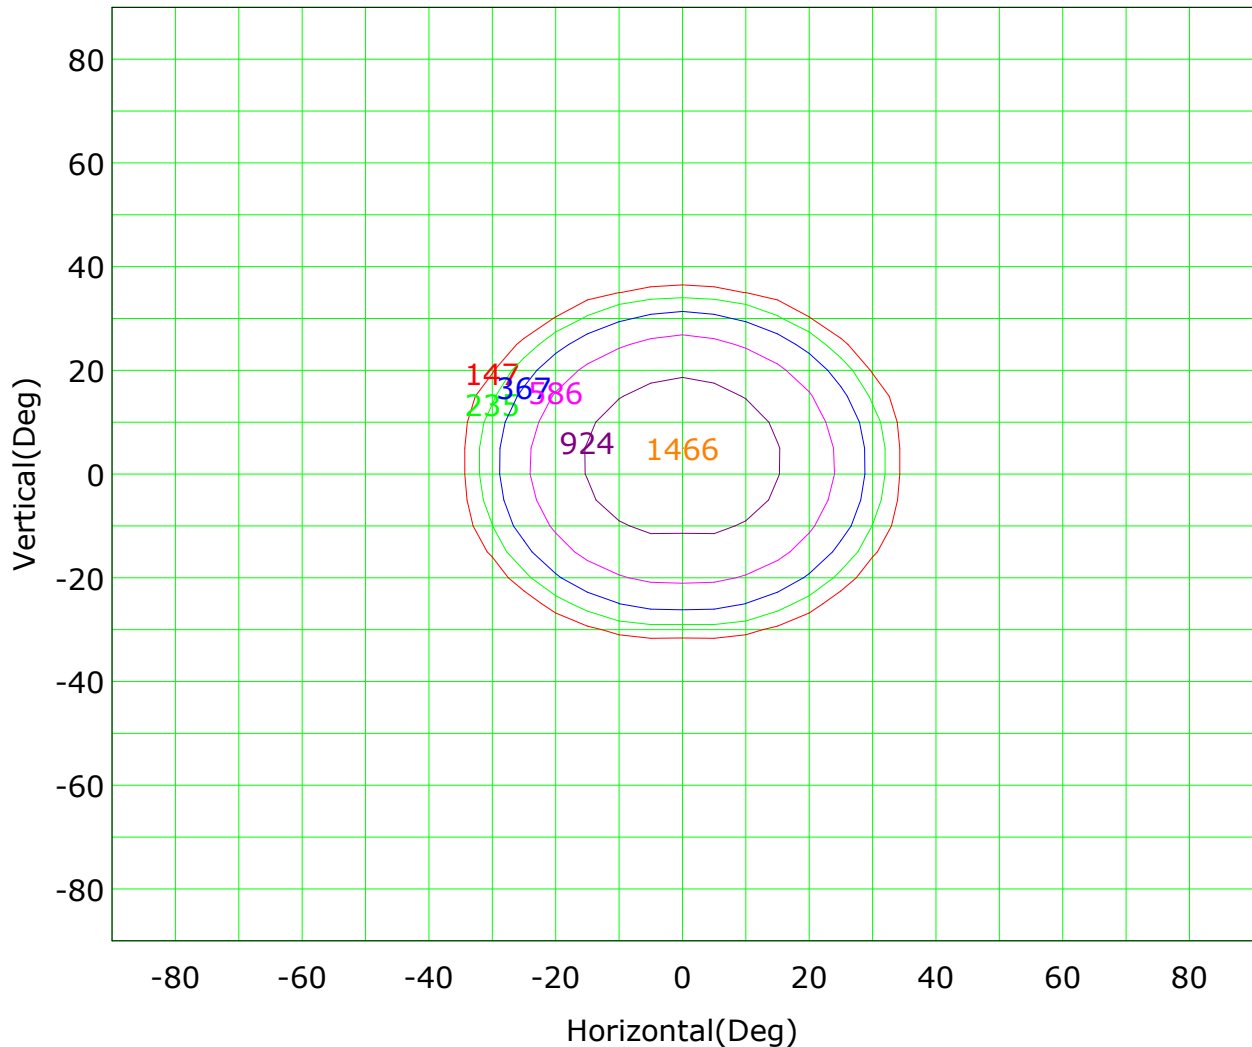

Imax (100%): 1466 cd

( 10%): 147 cd	( 16%): 235 cd
( 25%): 367 cd	( 40%): 586 cd
( 63%): 924 cd	(100%): 1466 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

## IsoLux Plot

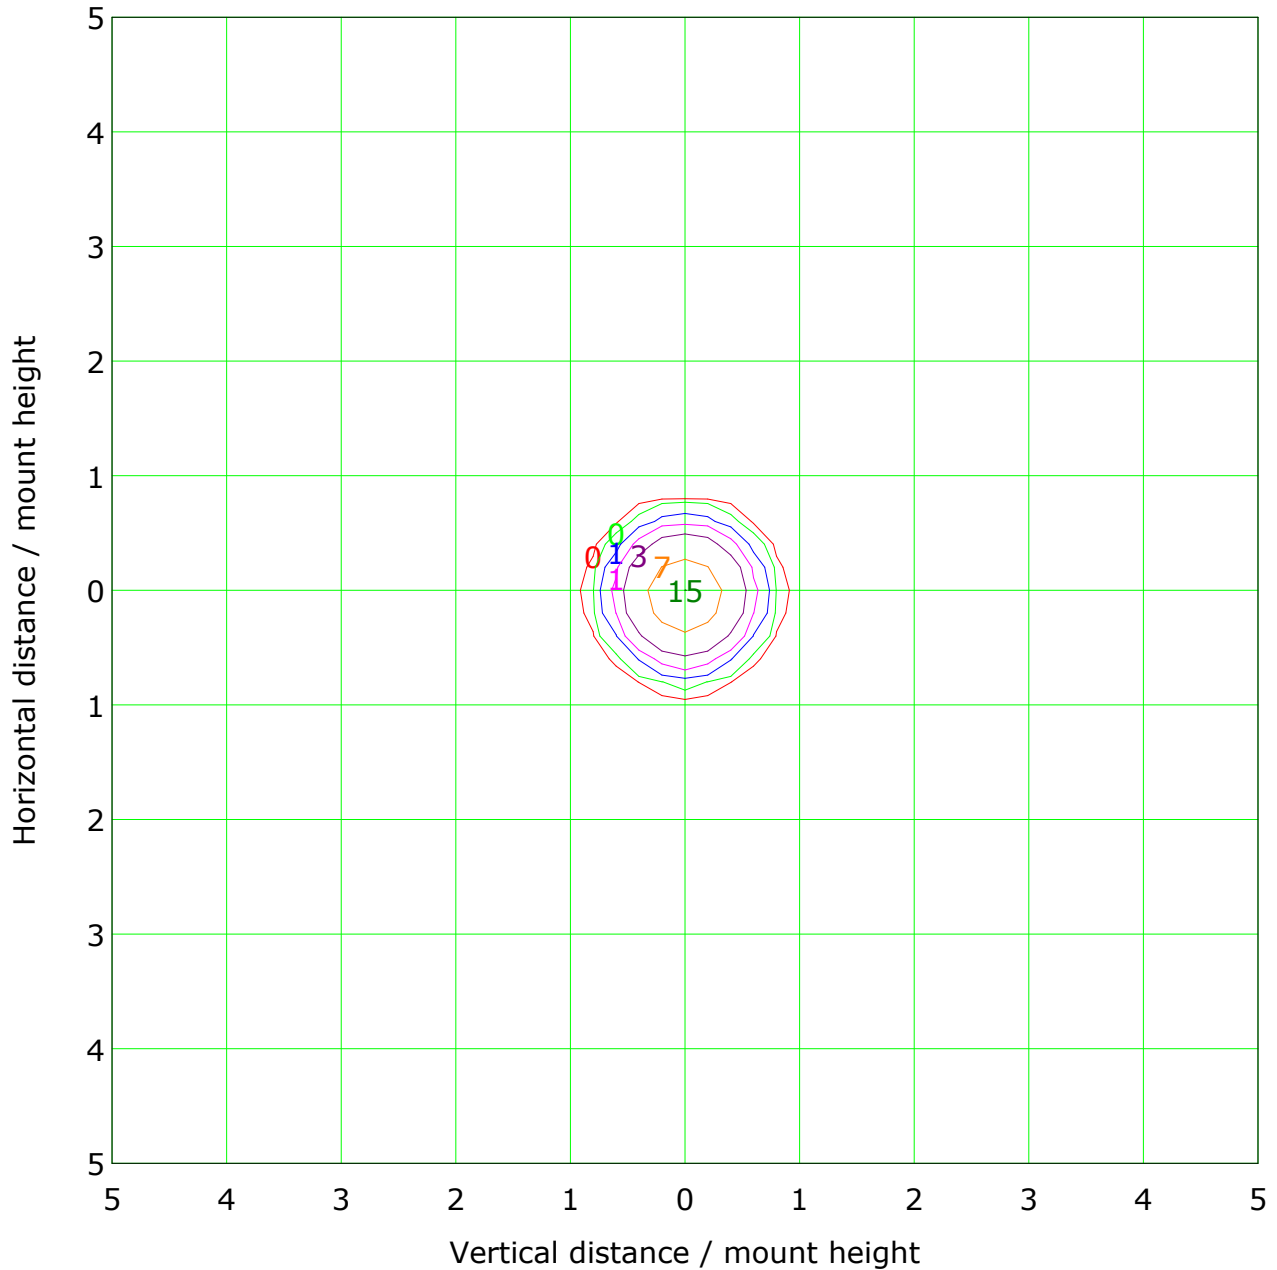

Mounting Height: 10m		Max Lux(100%): 15 lx	
— ( 1%):	0 lx	— ( 2%):	0 lx
— ( 5%):	1 lx	— ( 10%):	1 lx
— ( 20%):	3 lx	— ( 50%):	7 lx
— (100%):	15 lx		

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m


Humidity:

Inspector:

## Illuminance at a Distance

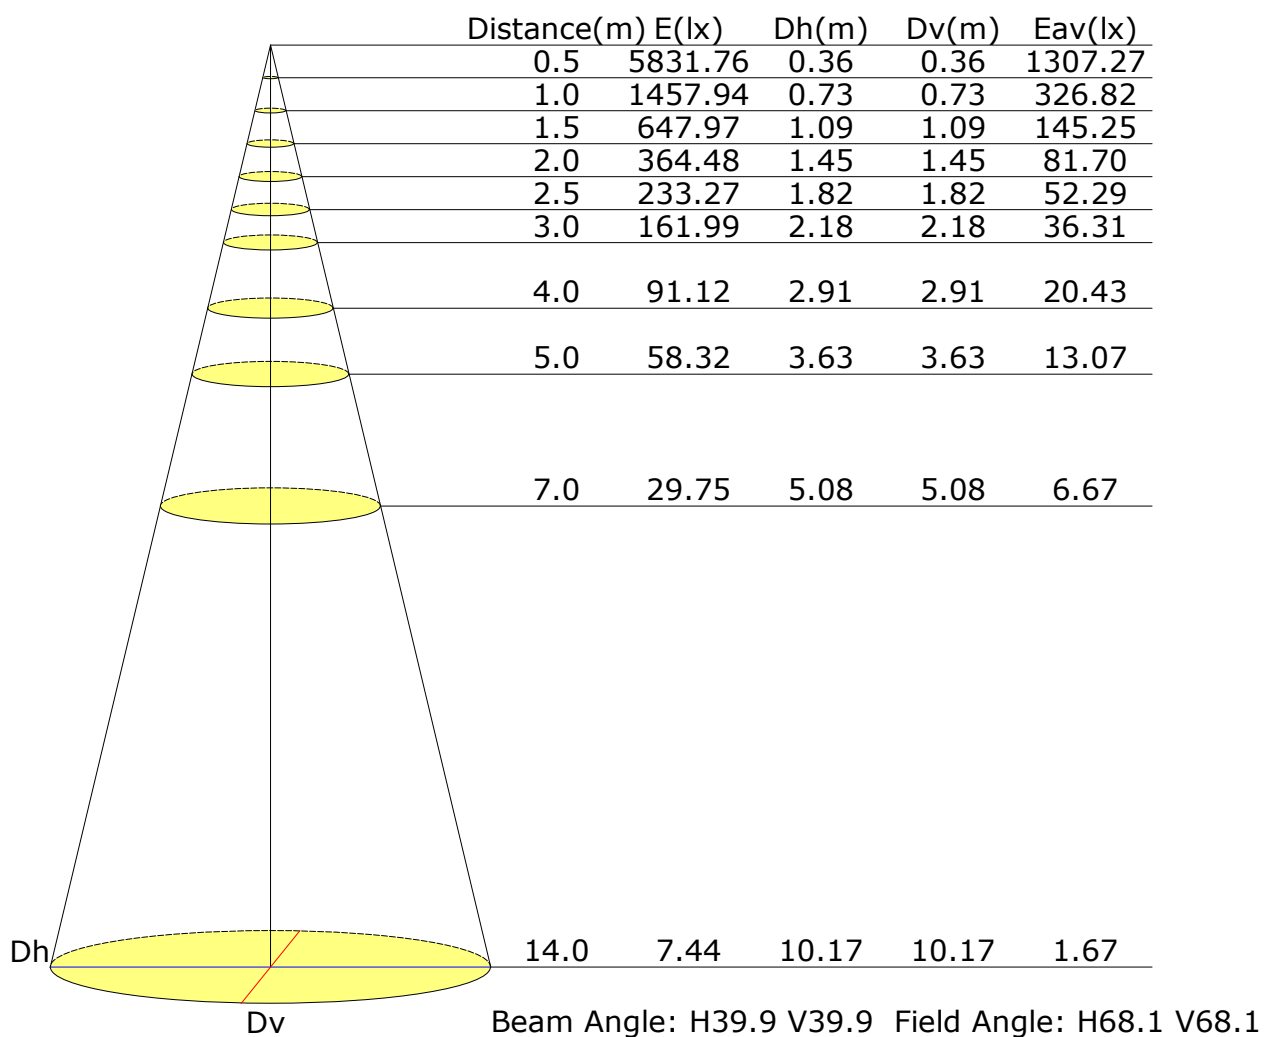

## Vertical IsoLux Plot

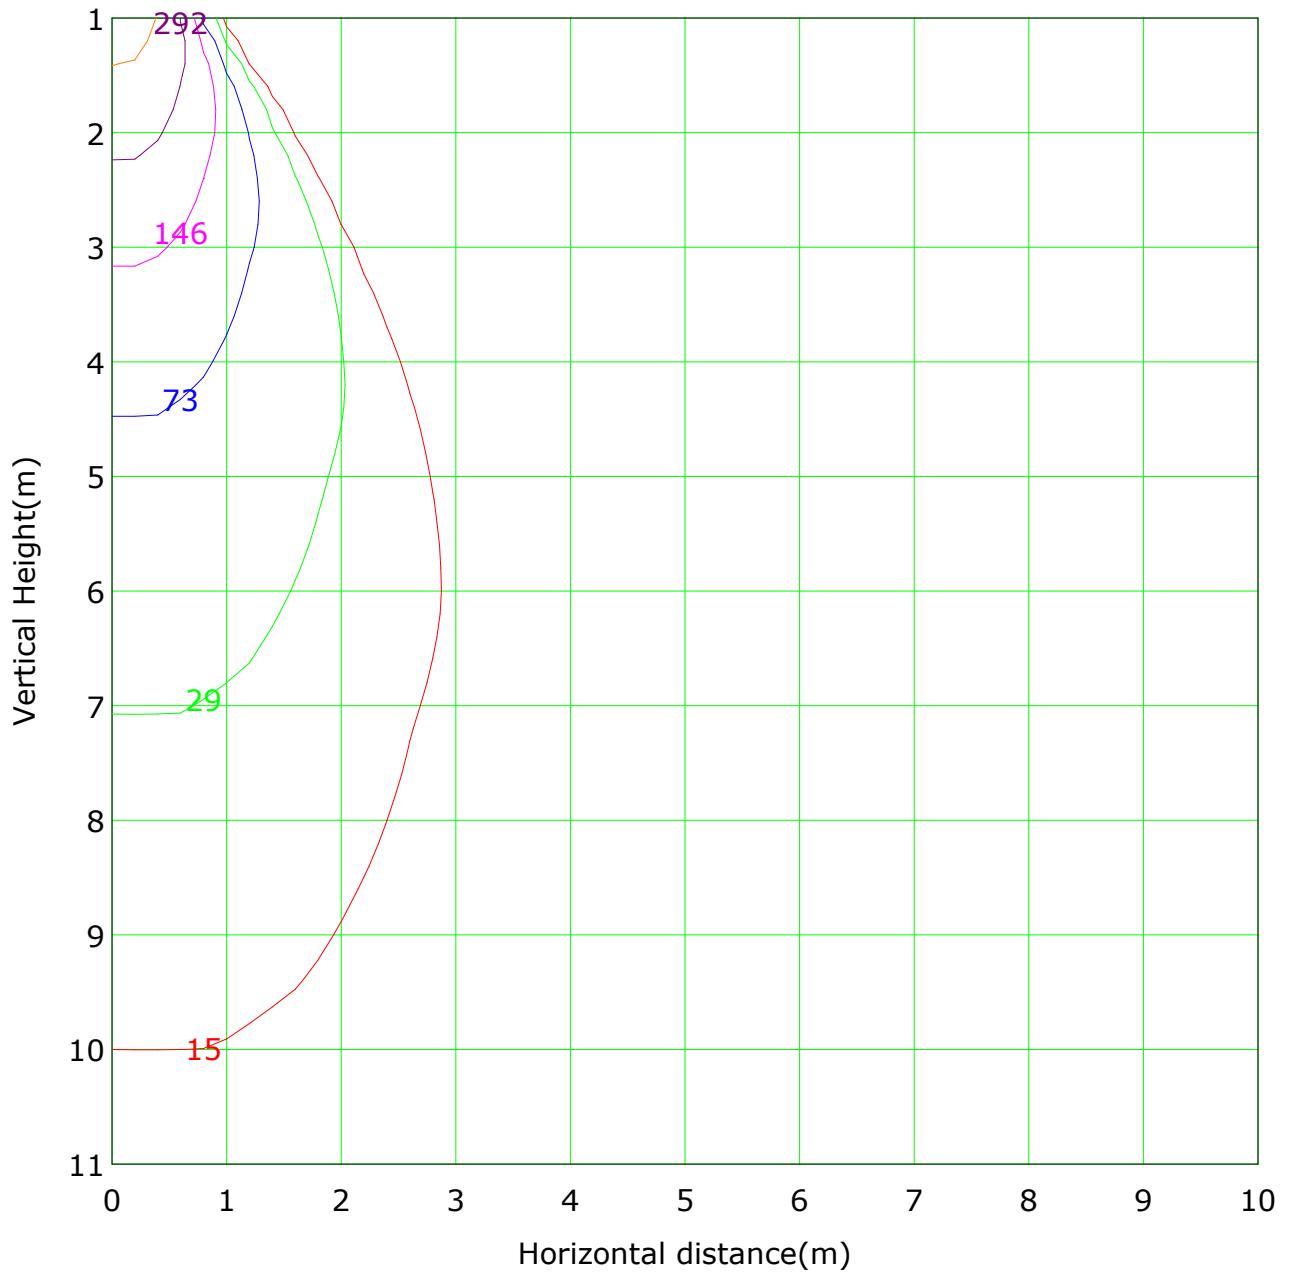


Lowest(m): 1m    Highest(m): 11    Max Lux: 1458

( 1%): 15 lx	( 2%): 29 lx
( 5%): 73 lx	( 10%): 146 lx
( 20%): 292 lx	( 50%): 729 lx
(100%): 1458 lx	

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## The average illuminance effective figure

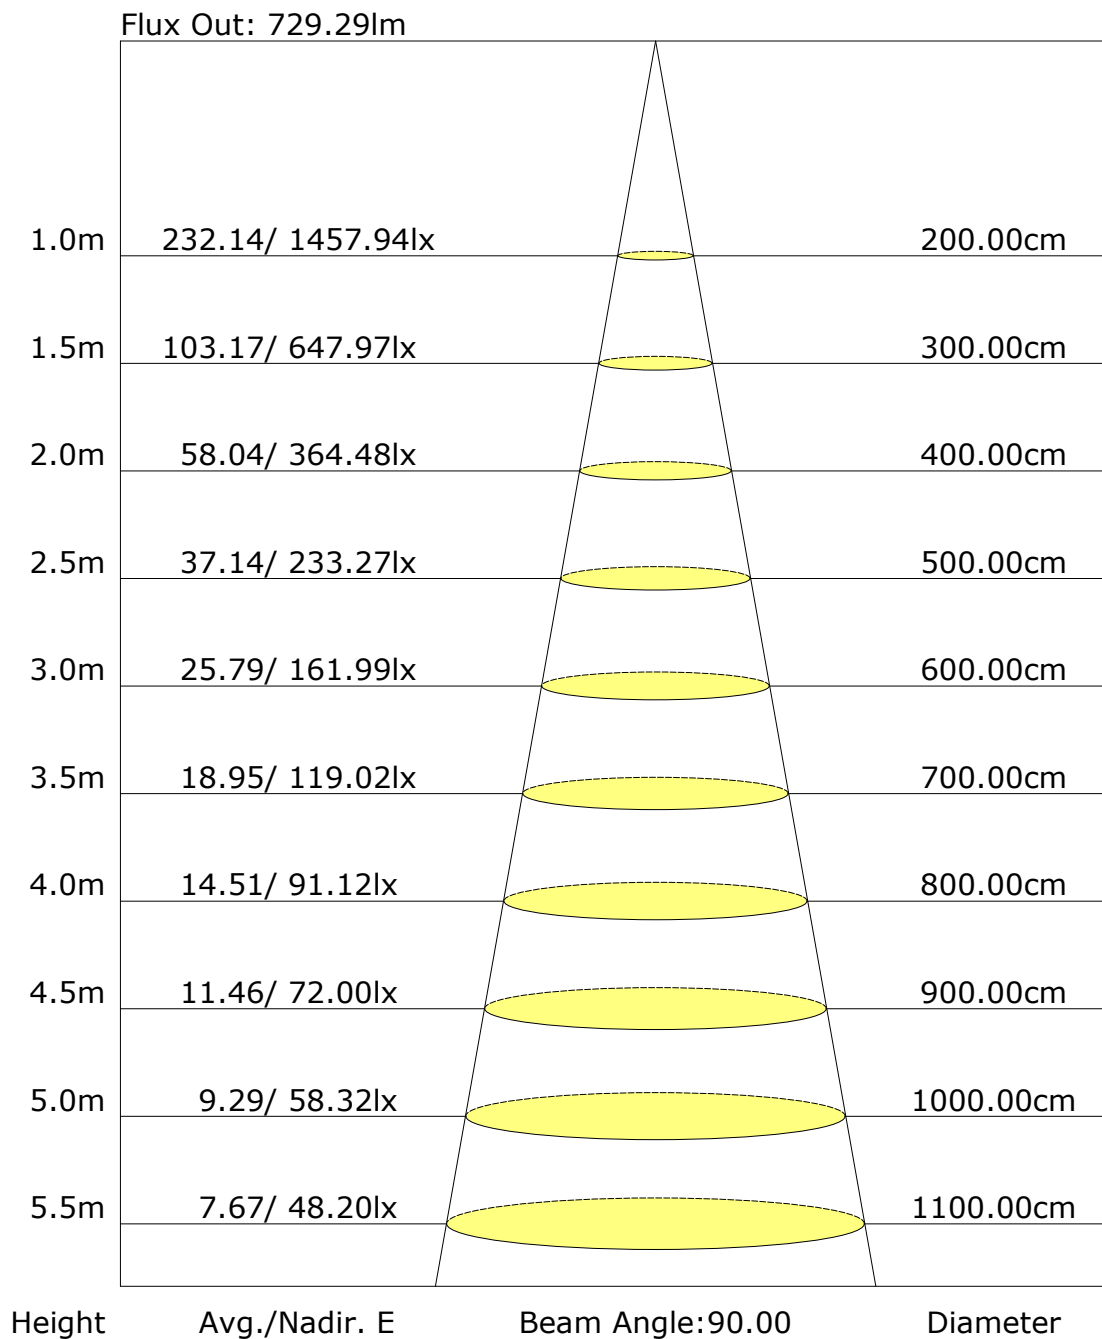

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:



## Unit: cd

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector: