

Report No.: 93.11611 ADJ

Test Time: 2023-09-15 14:47

## Luminaire Property

Luminaire Category:

Luminaire Description: Bridgelux V10A F90 3 Voltage: 226.7 V

Current: 0.155 A

Power: 19.30 W

Power Factor: 0.545

## Photometric Results

CIE Class: Direct

Measurement Flux: 2098.9 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H53.3

Vertical Diffuse Angle(50%): V53.3

Luminaire Efficacy Rating (LER): 109

Max. Intensity: 2723.2 cd

Total Rated Lamp Lumens: 2098.9 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 2690.11 cd

Pos of Max. Intensity: H180 V5

Picture Of Luminaire



Luminous Intensity Distribution Curve

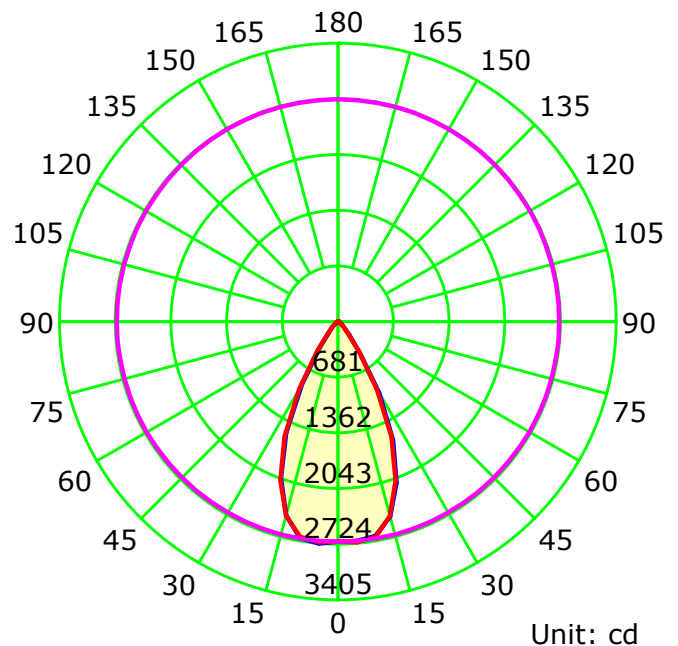

— C0-C180 — C90-C270 — G5

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


## Luminous Intensity Distribution Curve

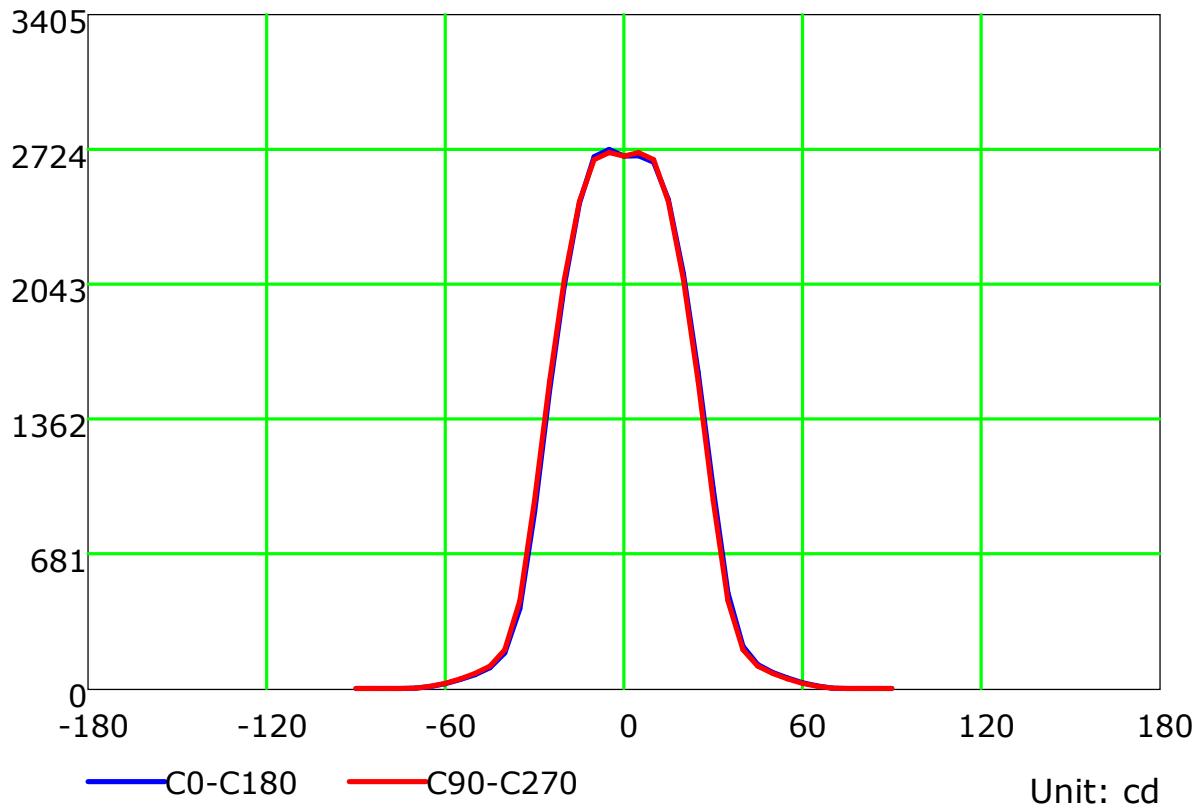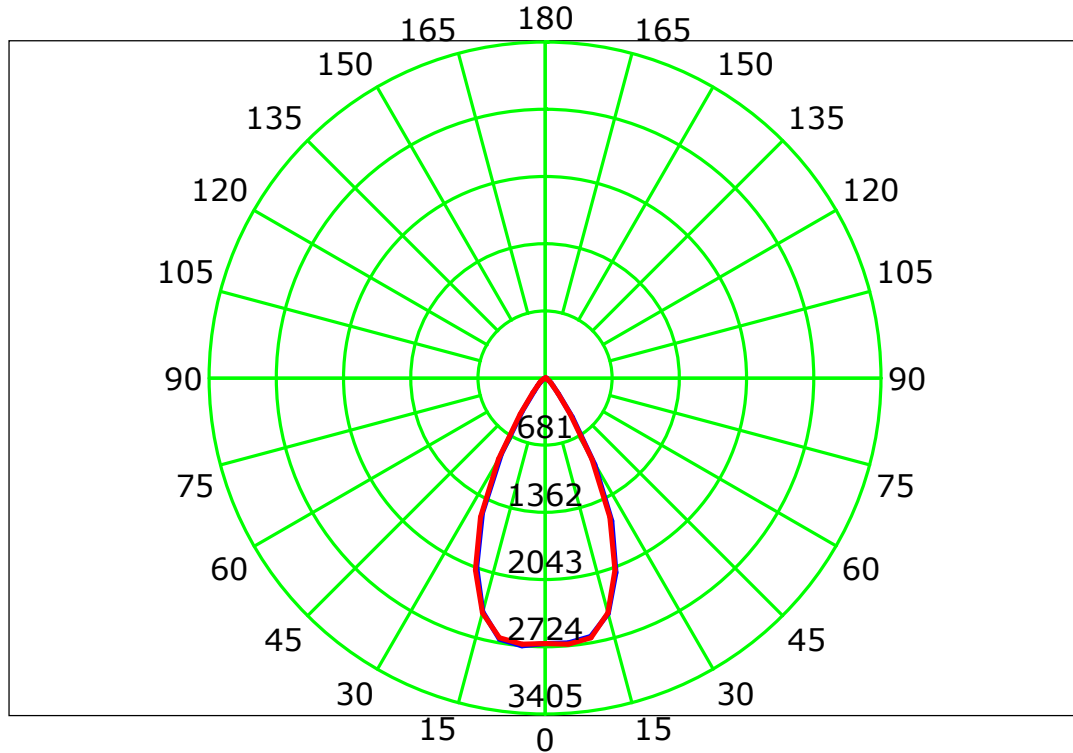

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Isocandela (rectangle)

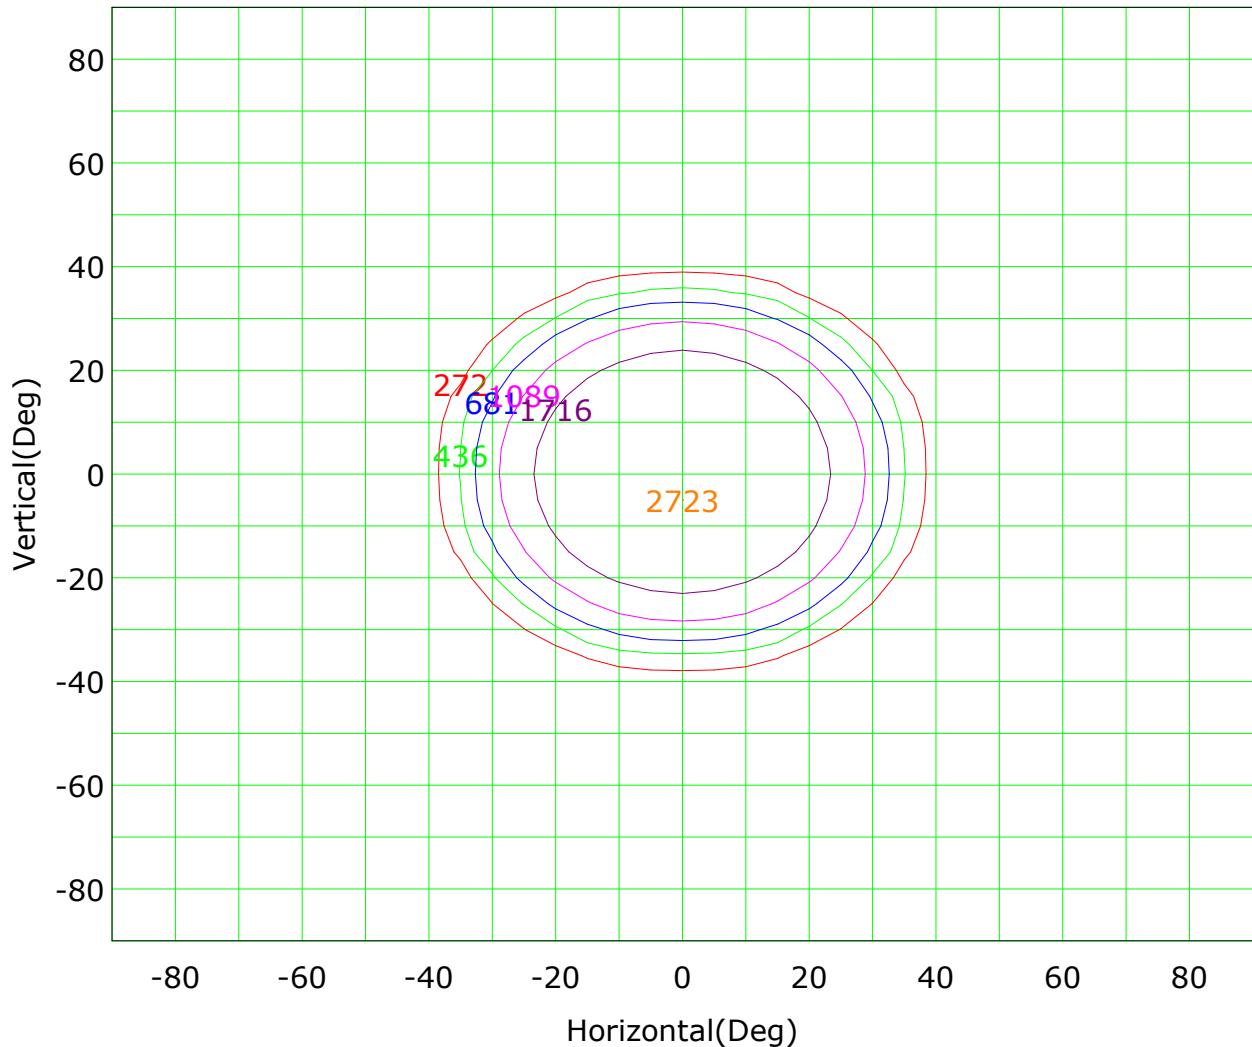

Imax (100%): 2723 cd

( 10%): 272 cd	( 16%): 436 cd
( 25%): 681 cd	( 40%): 1089 cd
( 63%): 1716 cd	(100%): 2723 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

## IsoLux Plot

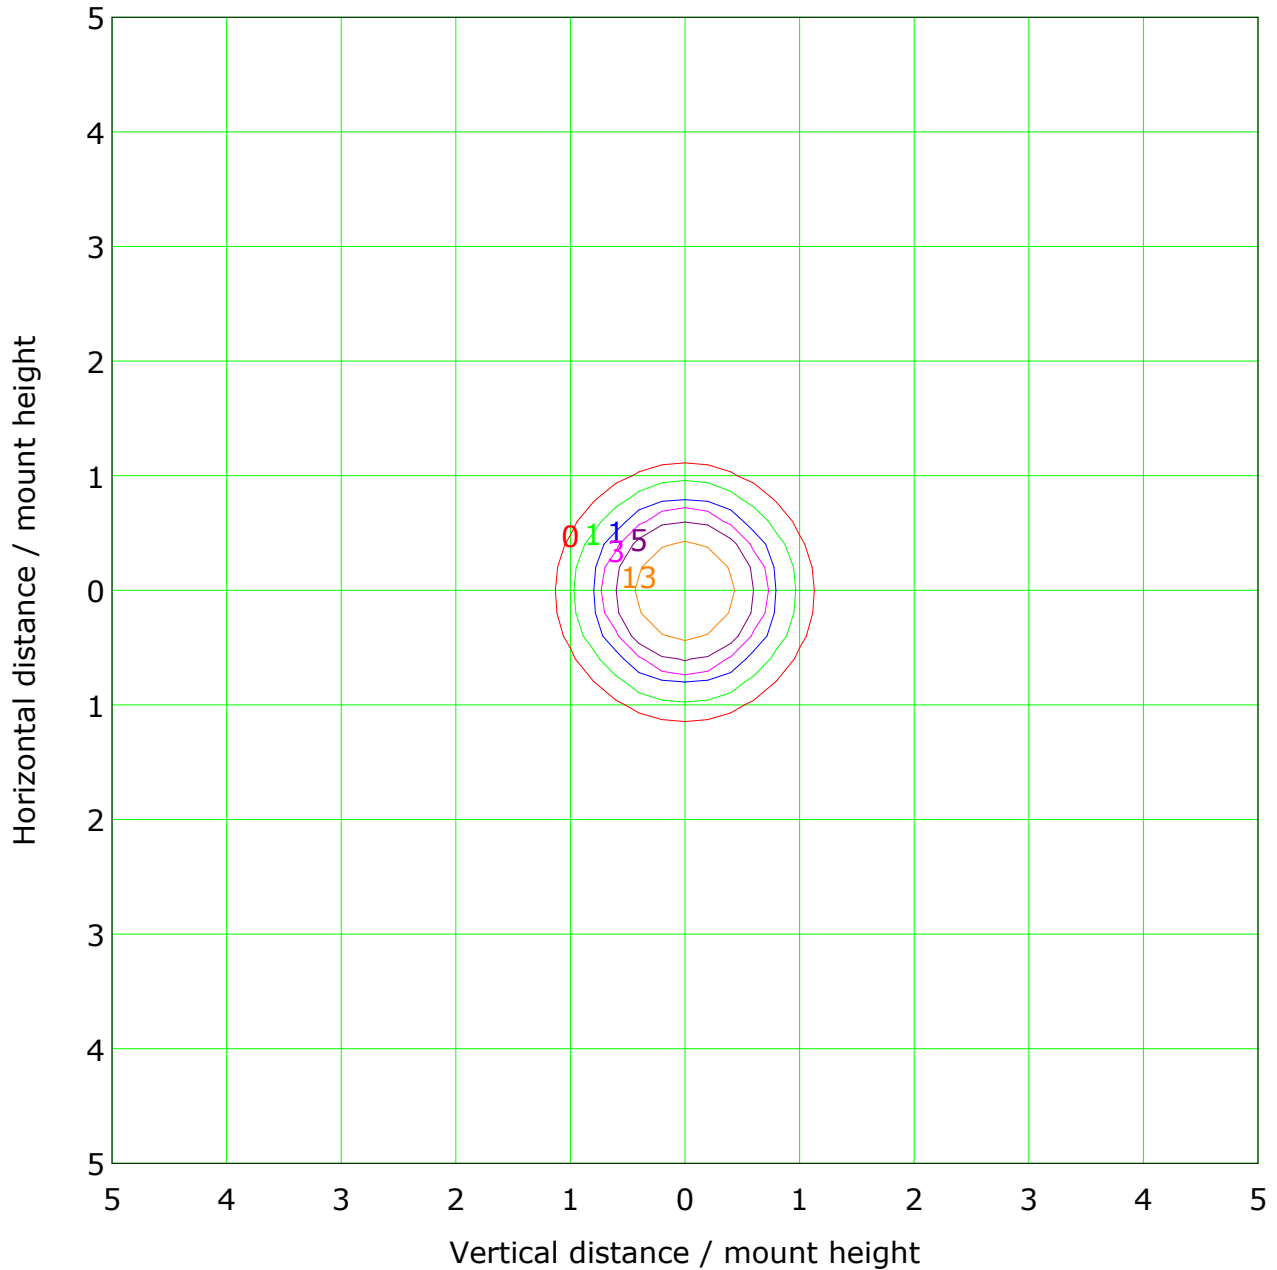

Mounting Height: 10m		Max Lux(100%): 27 lx	
( 1%):	0 lx	( 2%):	1 lx
( 5%):	1 lx	( 10%):	3 lx
( 20%):	5 lx	( 50%):	13 lx
(100%):	27 lx		

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m


Humidity:

Inspector:

## Illuminance at a Distance

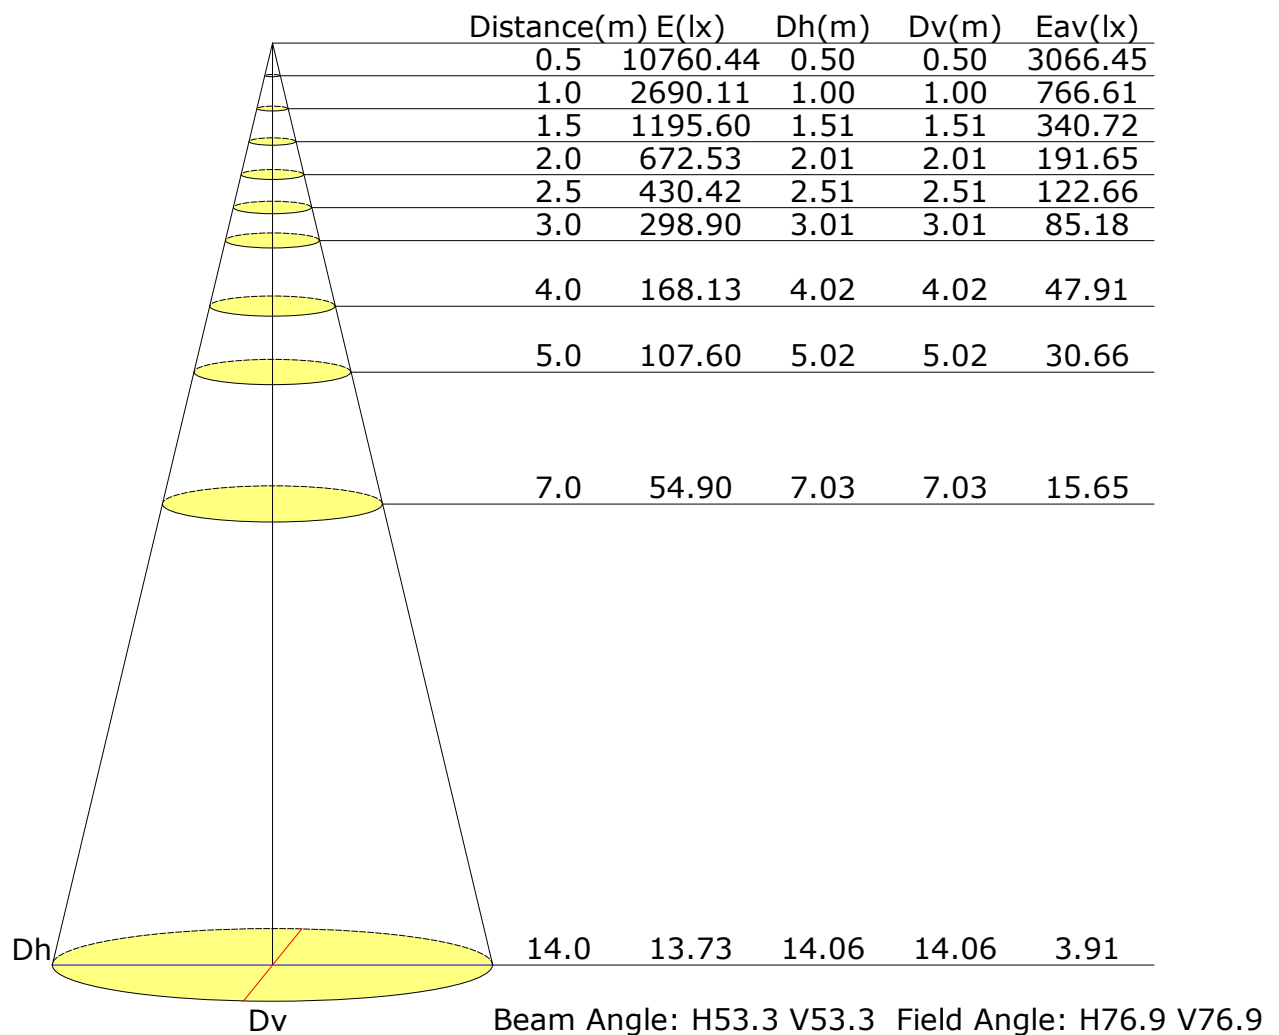

## Vertical IsoLux Plot

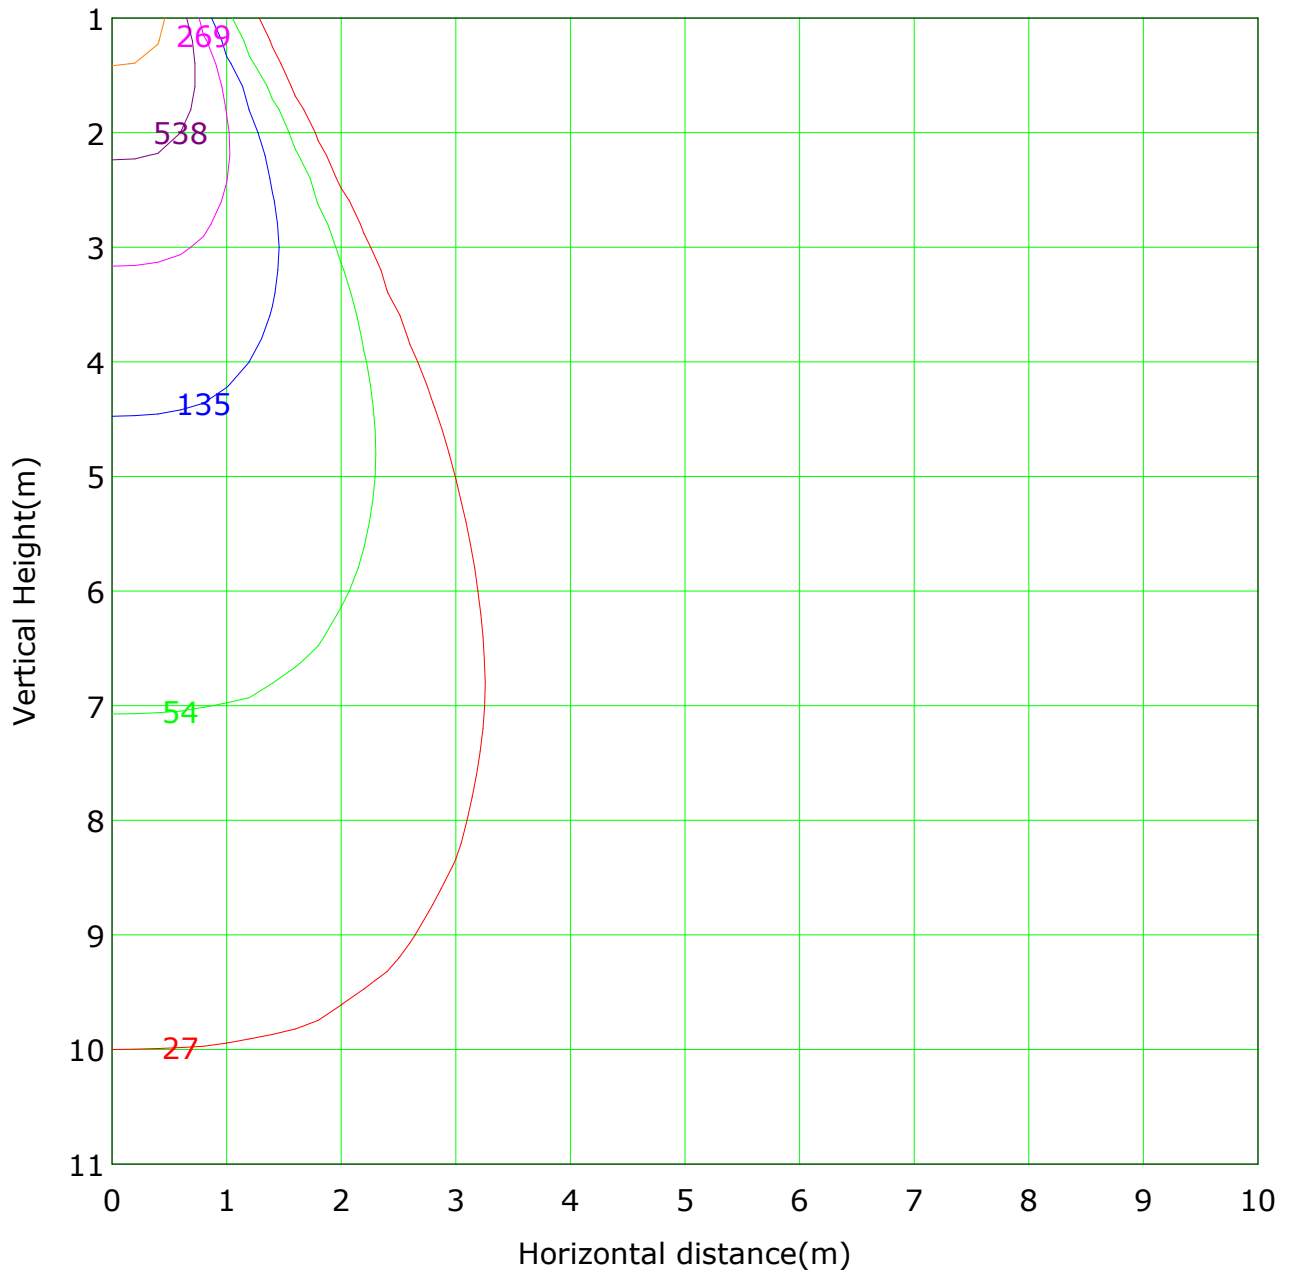


Lowest(m): 1m    Highest(m): 11    Max Lux: 2690

( 1%): 27 lx	( 2%): 54 lx
( 5%): 135 lx	( 10%): 269 lx
( 20%): 538 lx	( 50%): 1345 lx
(100%): 2690 lx	

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## The average illuminance effective figure

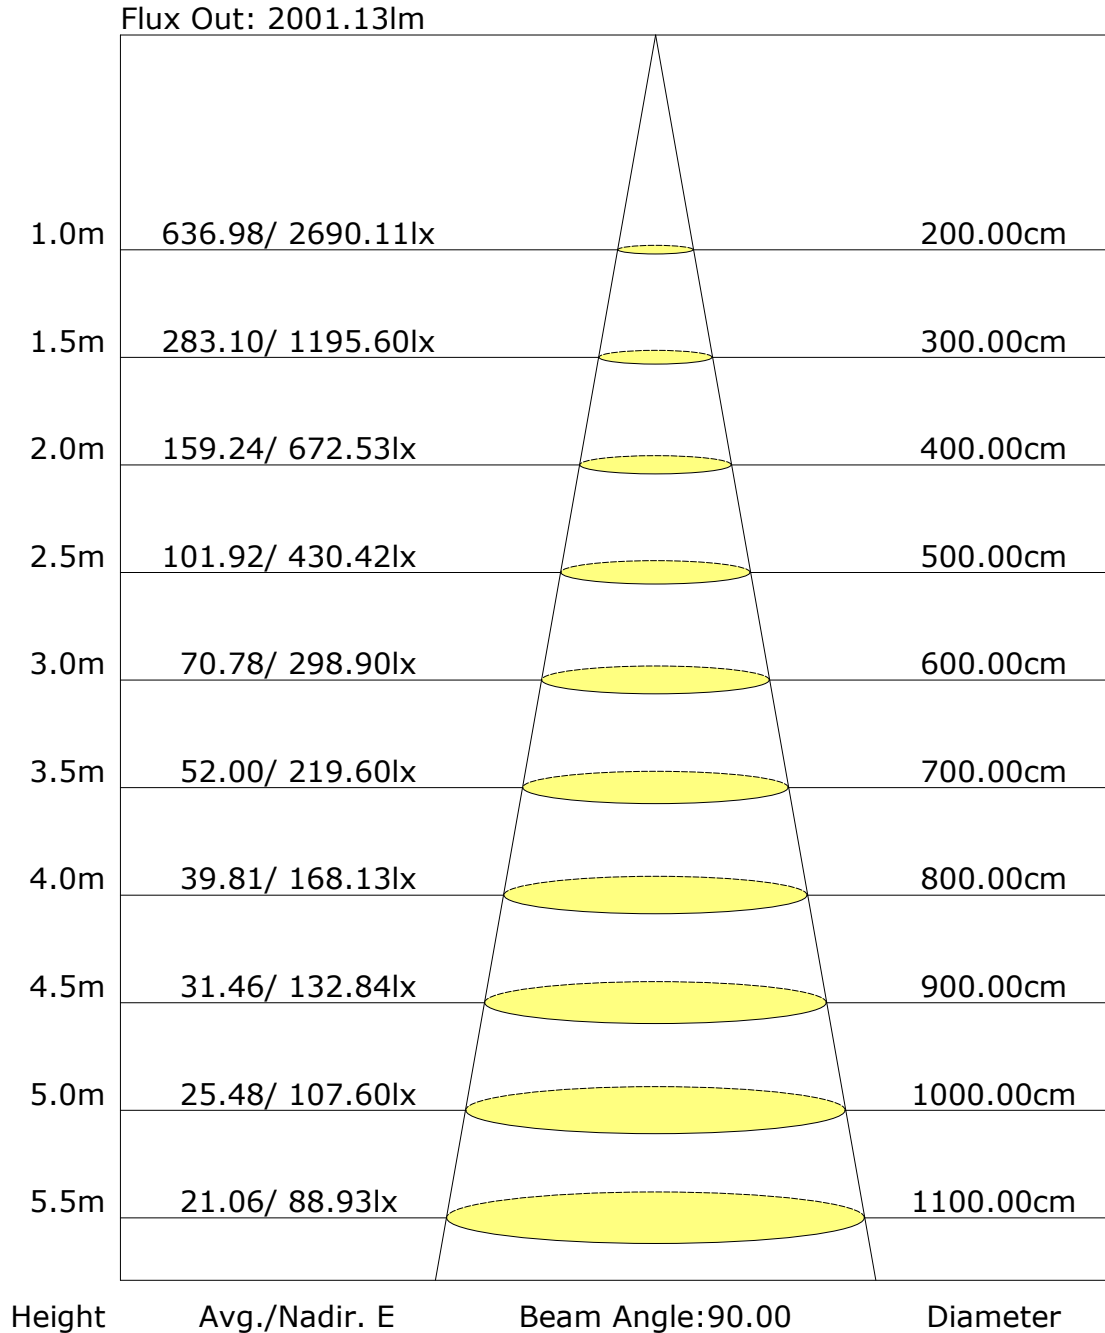

[illegible]

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:



Inspector: