

Report No.: AX-PD-SP-15W-045

Test Time: 2023-09-28 15:26

## Luminaire Property

Luminaire Category: Bridgelux V10 F90 4000K CRI90

Voltage: 221.7 V

Current: 0.112 A

Power: 24.10 W

Power Factor: 0.967

## Photometric Results

CIE Class: Direct

Measurement Flux: 2483.7 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H52.8

Vertical Diffuse Angle(50%): V52.8

Luminaire Efficacy Rating (LER): 103

Max. Intensity: 3484.8 cd

Total Rated Lamp Lumens: 2483.7 lm

Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 3269.02 cd

Pos of Max. Intensity: H180 V10

Picture Of Luminaire



Luminous Intensity Distribution Curve

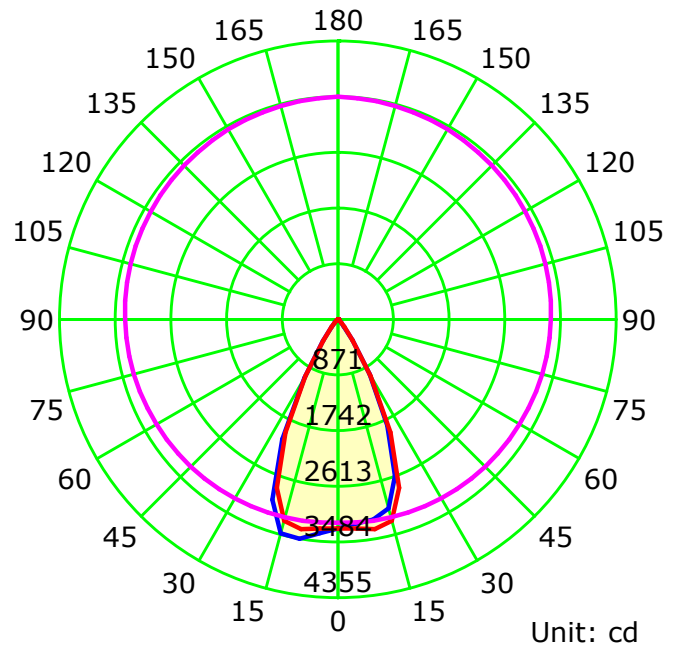

— C0-C180 — C90-C270 — G10

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


## Luminous Intensity Distribution Curve

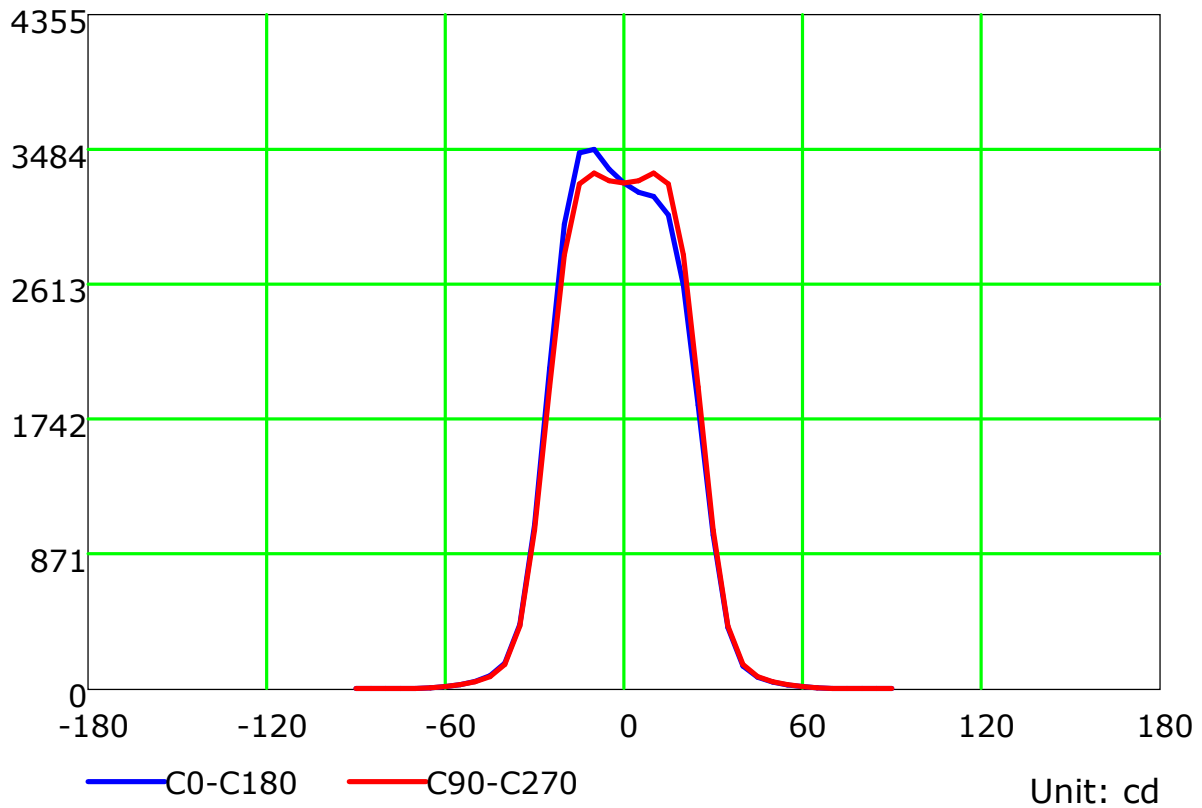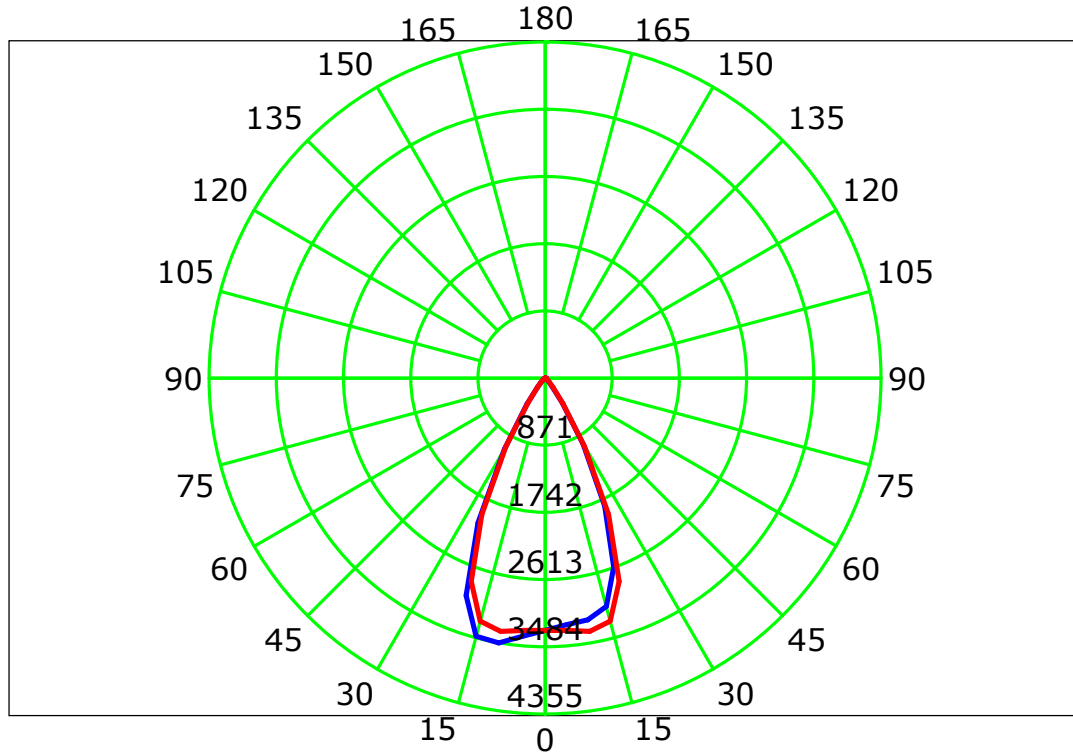

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Isocandela (rectangle)

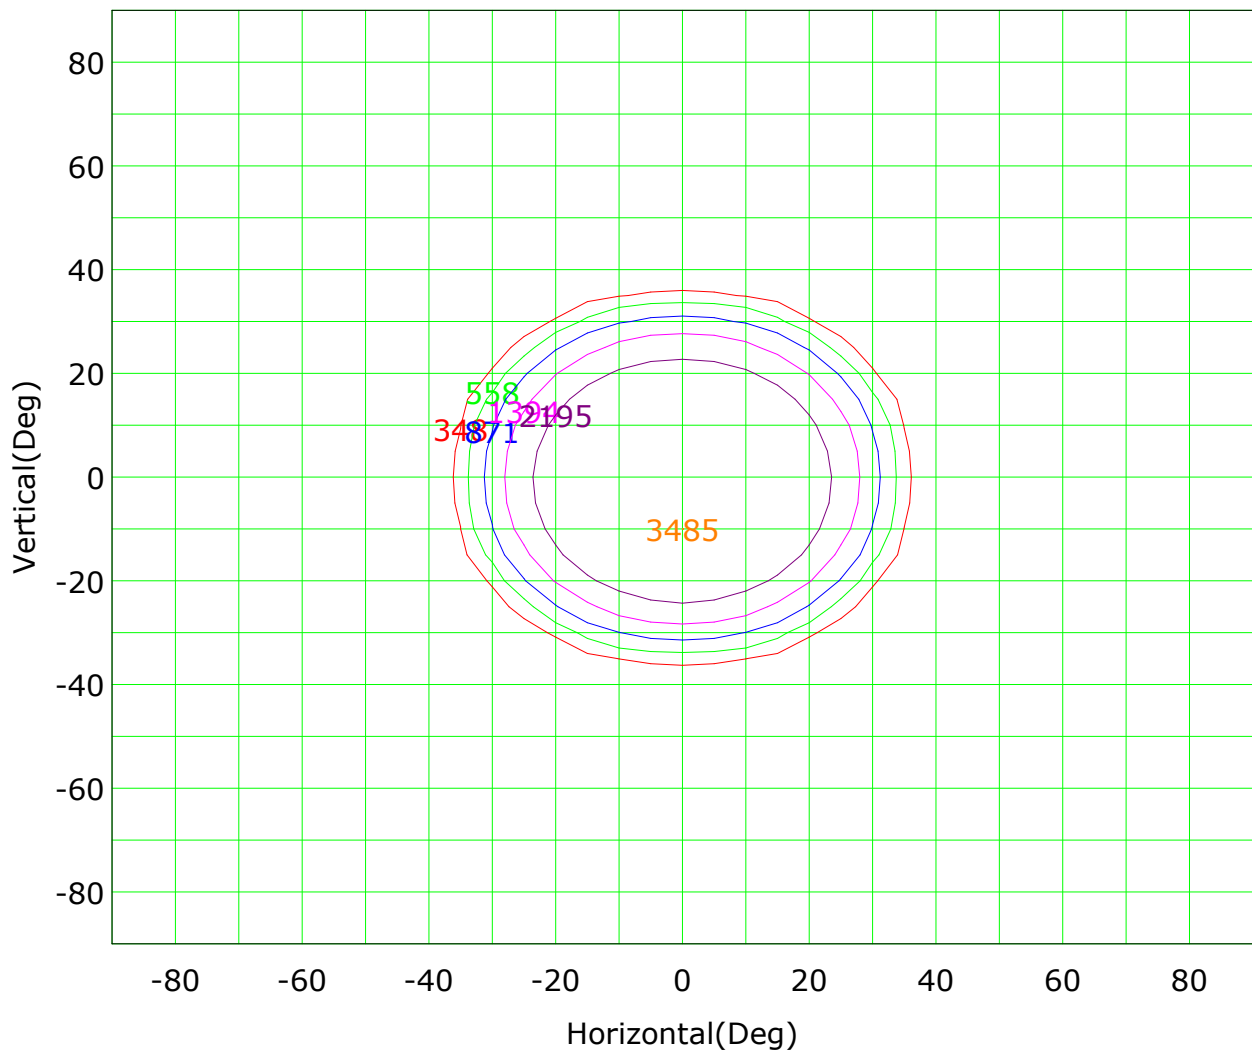

Imax (100%): 3485 cd

( 10%): 348 cd	( 16%): 558 cd
( 25%): 871 cd	( 40%): 1394 cd
( 63%): 2195 cd	(100%): 3485 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

## IsoLux Plot

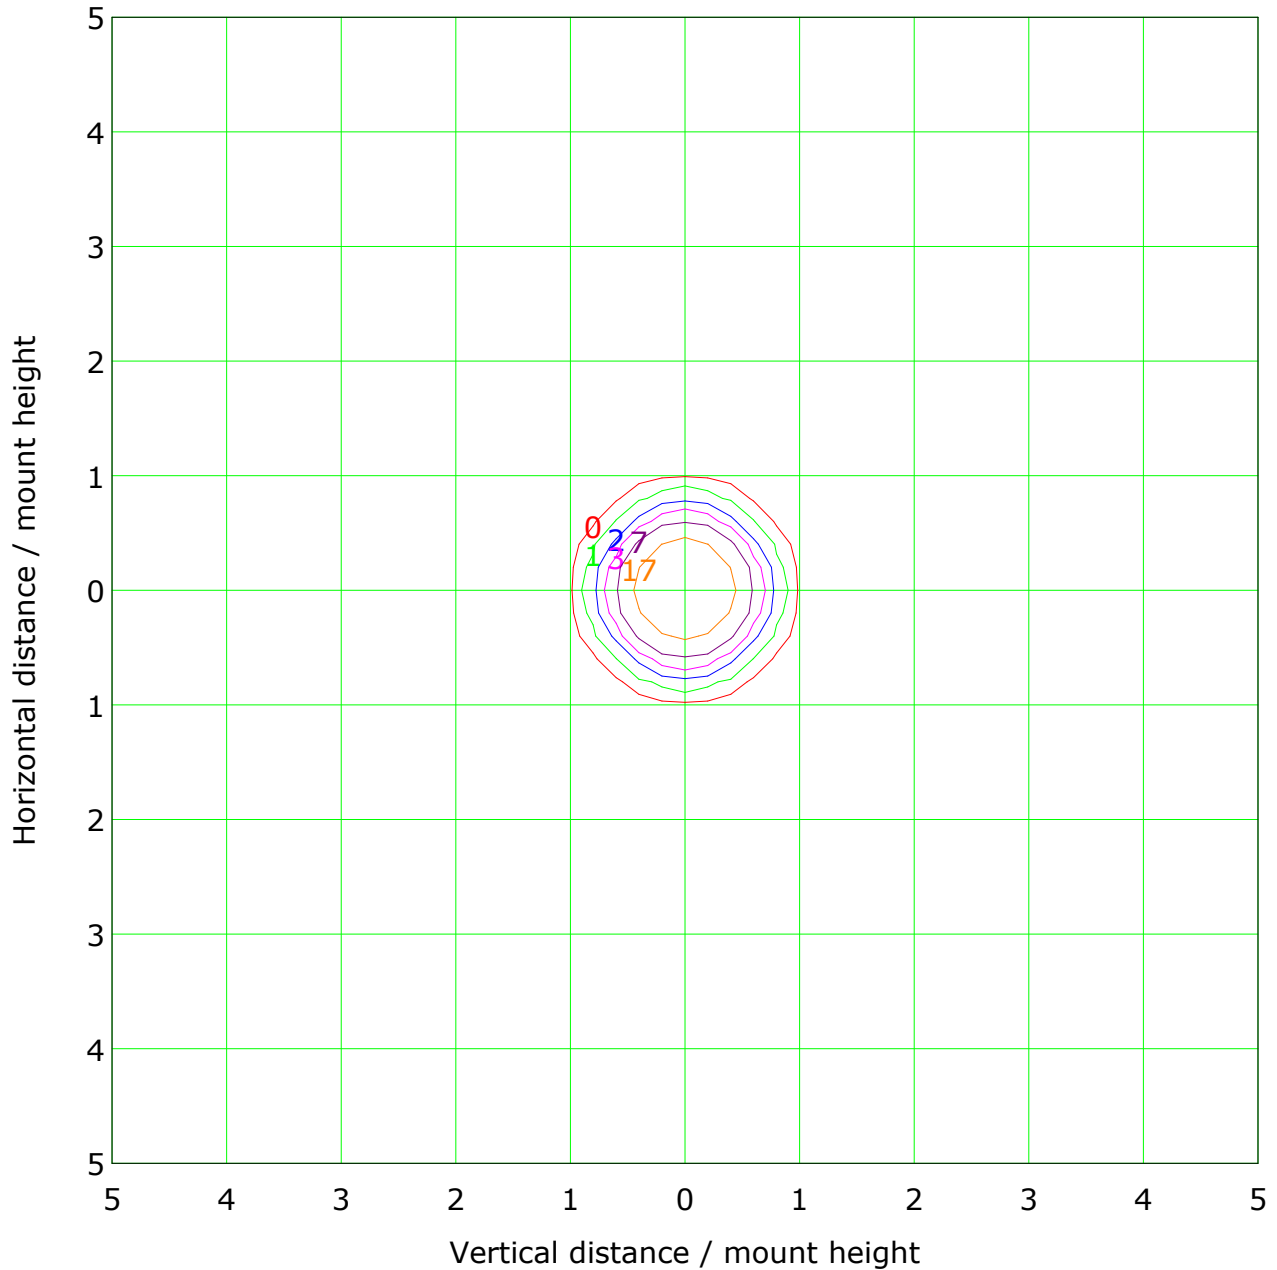

Mounting Height: 10m		Max Lux(100%): 33 lx	
— ( 1%):	0 lx	— ( 2%):	1 lx
— ( 5%):	2 lx	— ( 10%):	3 lx
— ( 20%):	7 lx	— ( 50%):	17 lx
— (100%):	33 lx		

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m


Humidity:

Inspector:

## Illuminance at a Distance

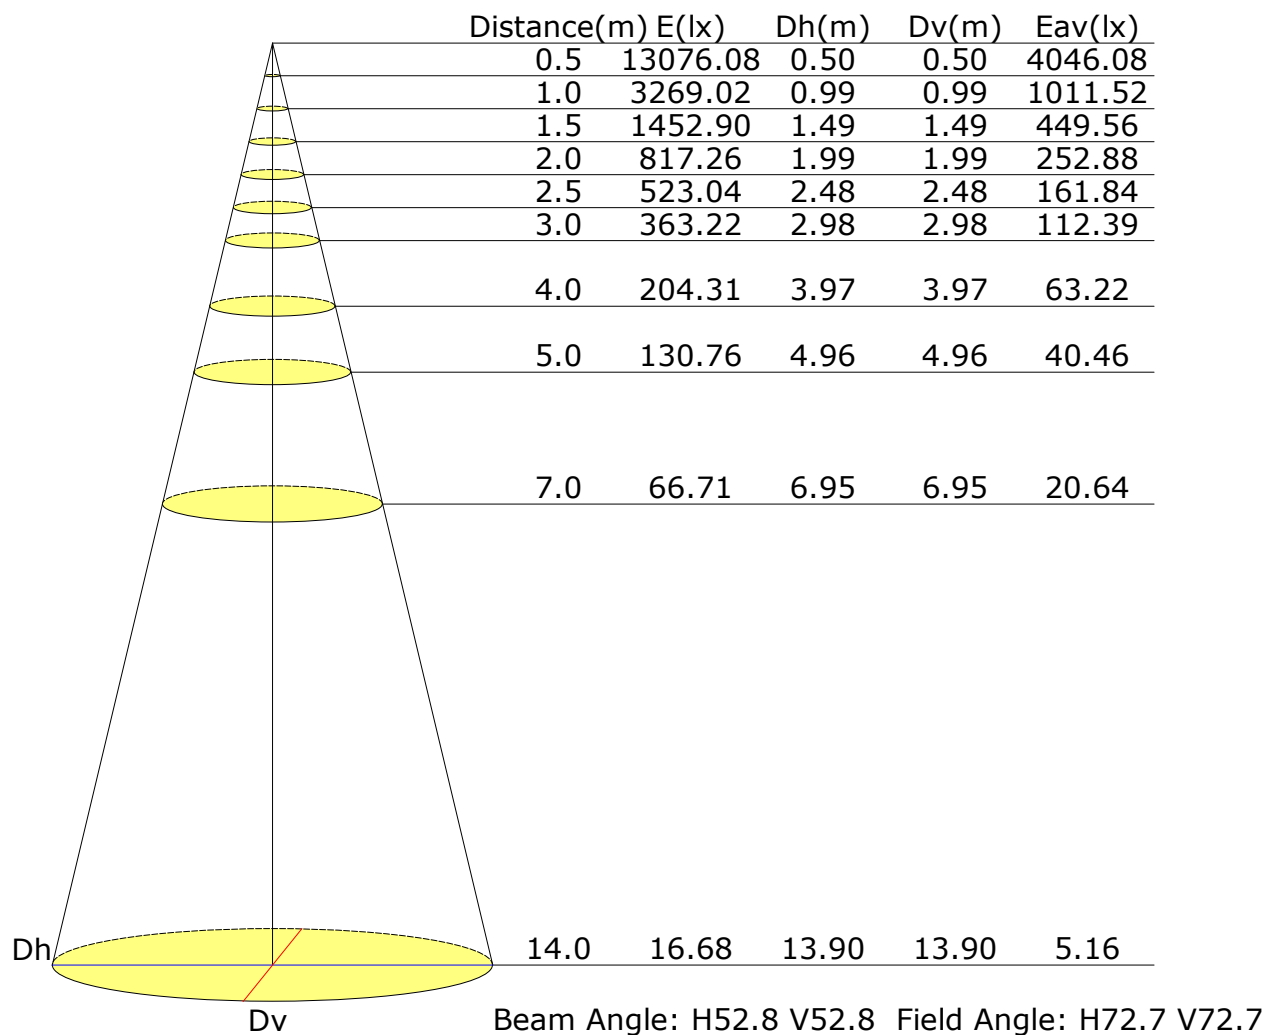

## Vertical IsoLux Plot

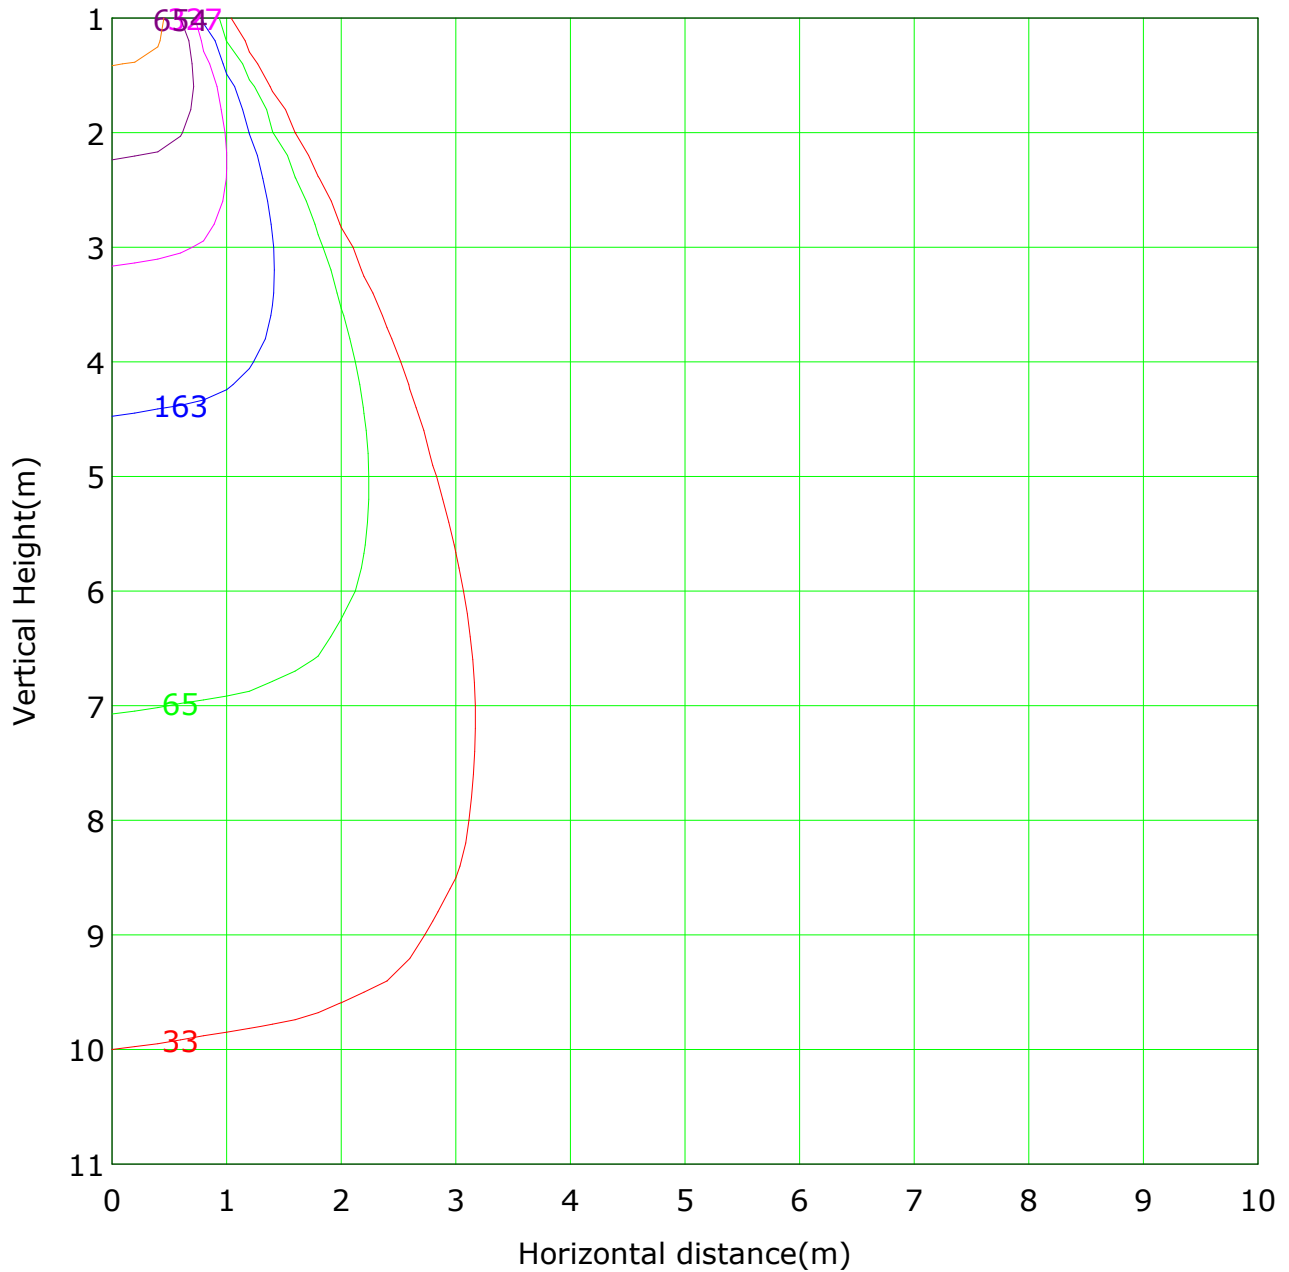


Lowest(m): 1m Highest(m): 11 Max Lux: 3269

( 1%): 33 lx	( 2%): 65 lx
( 5%): 163 lx	( 10%): 327 lx
( 20%): 654 lx	( 50%): 1635 lx
(100%): 3269 lx	

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## The average illuminance effective figure

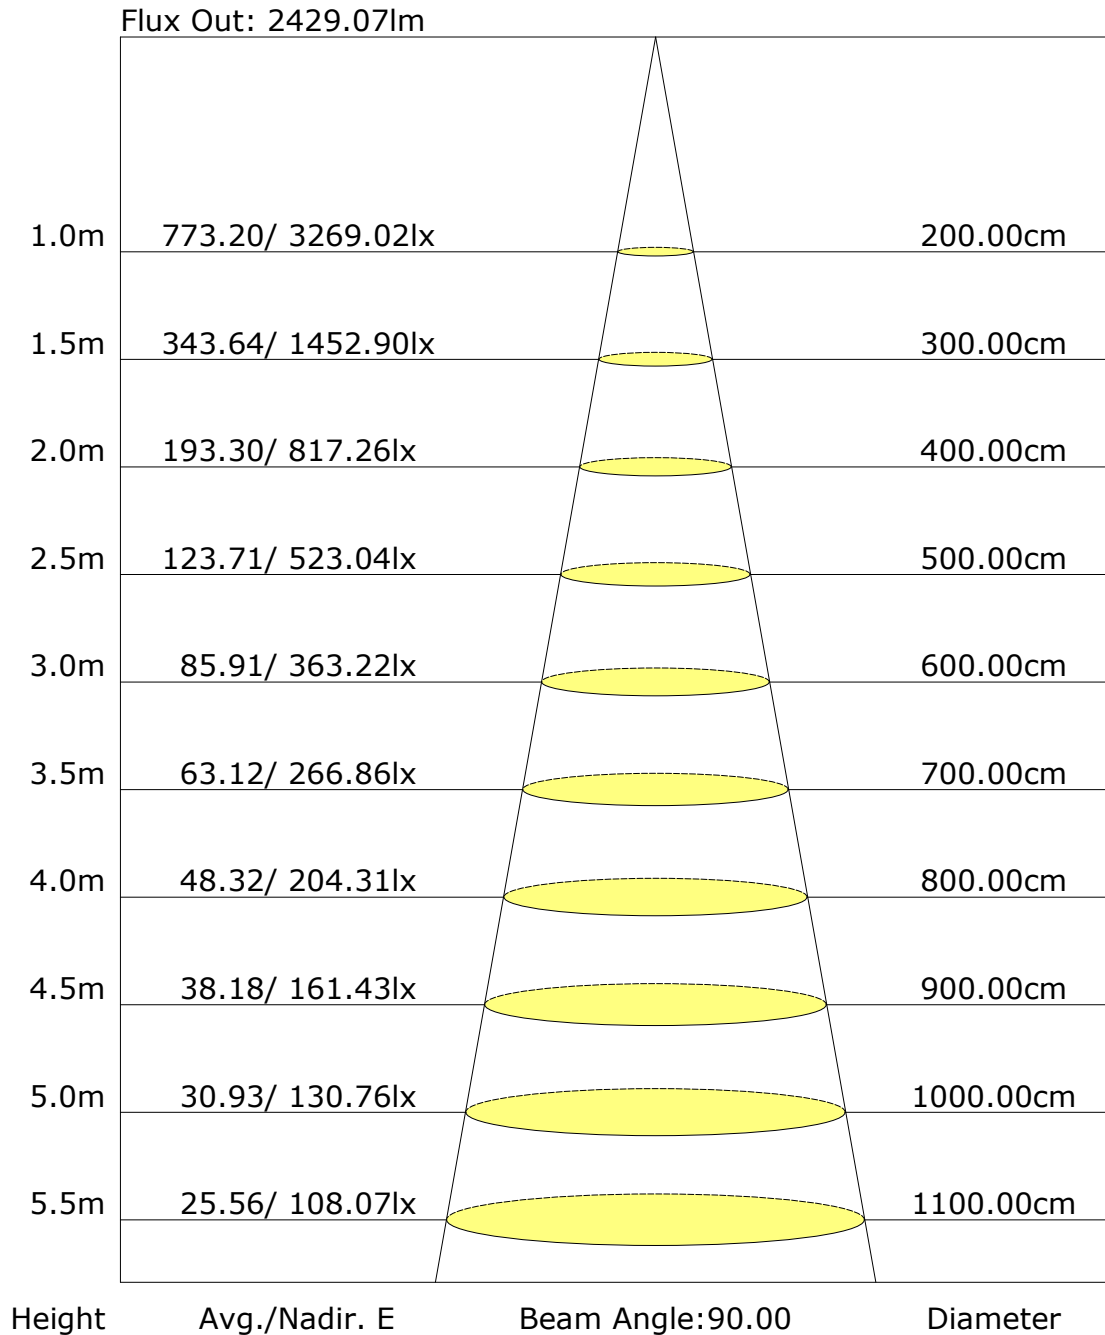

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:



## Unit: cd

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector: