

Report No.: AX\_TL\_FL\_25W\_073

Test Time: 2023-09-09 15:08

## Luminaire Property

Luminaire Category: Bridgelux V13C 3000K CRI90

Voltage: 218.3 V

Current: 0.109 A

Power: 23.30 W

Power Factor: 0.975

## Photometric Results

CIE Class: Direct

Measurement Flux: 2892.8 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H28

Vertical Diffuse Angle(50%): V28

Luminaire Efficacy Rating (LER): 124

Max. Intensity: 10923.41 cd

Total Rated Lamp Lumens: 2892.8 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 10923.4 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

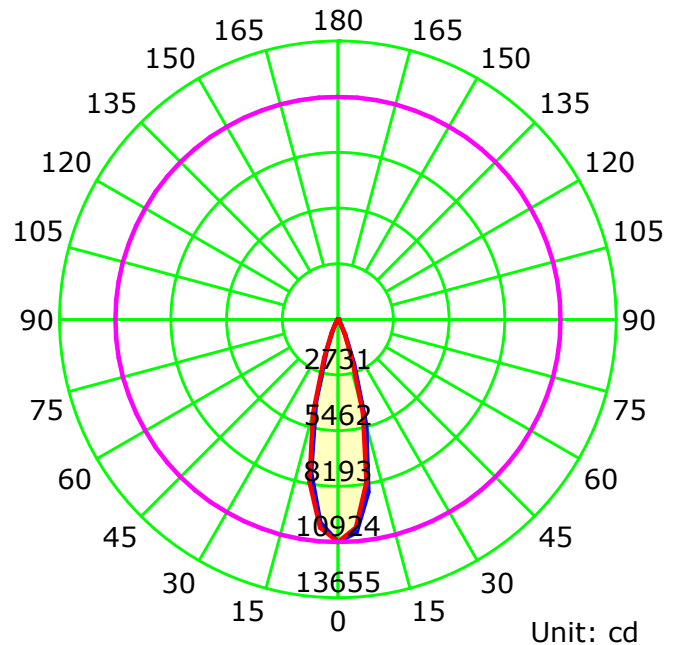

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


## Luminous Intensity Distribution Curve

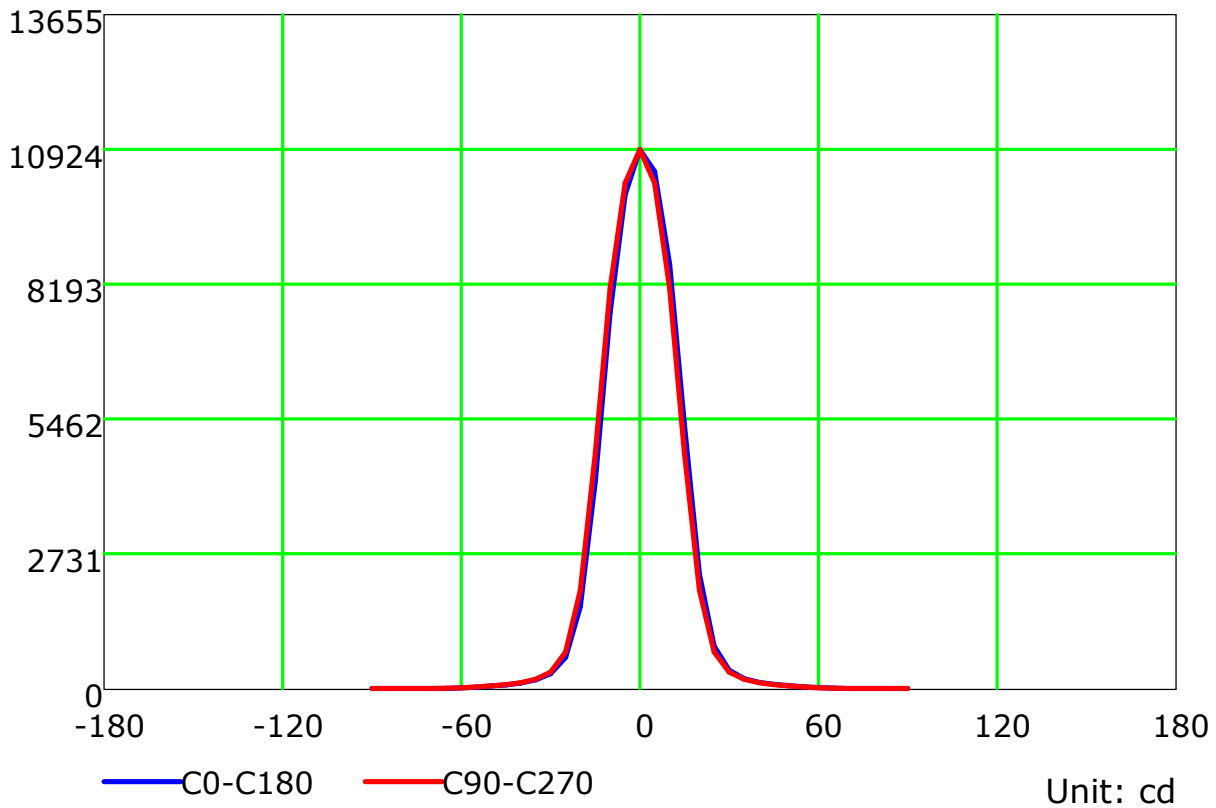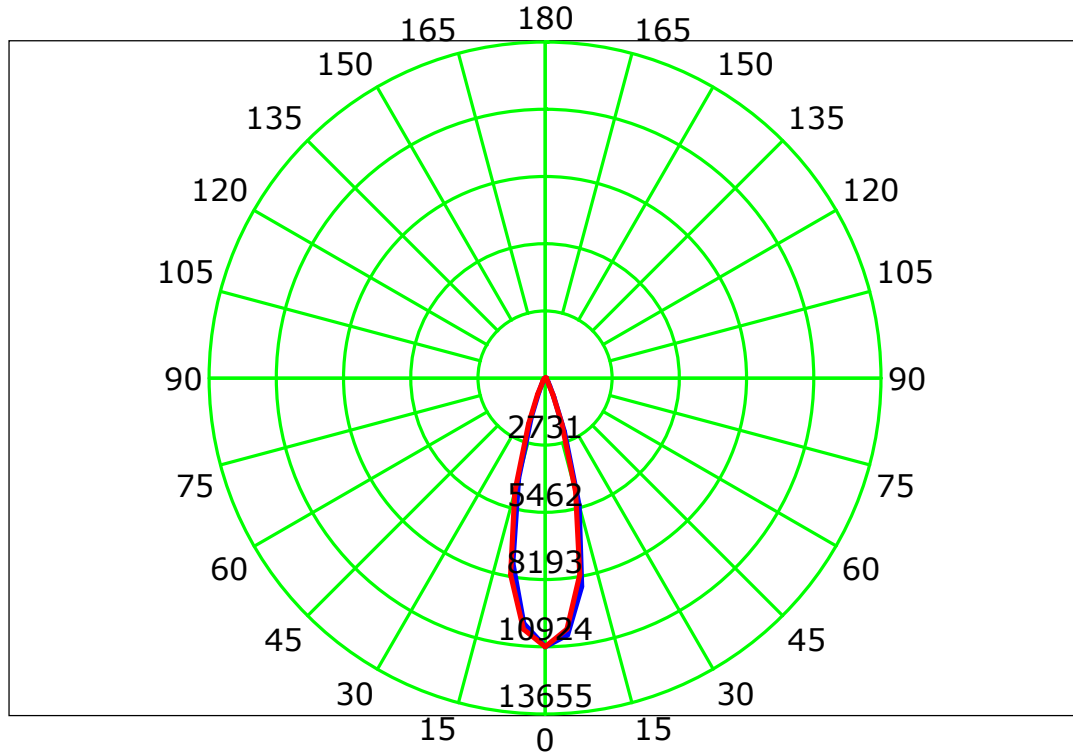

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Isocandela (rectangle)

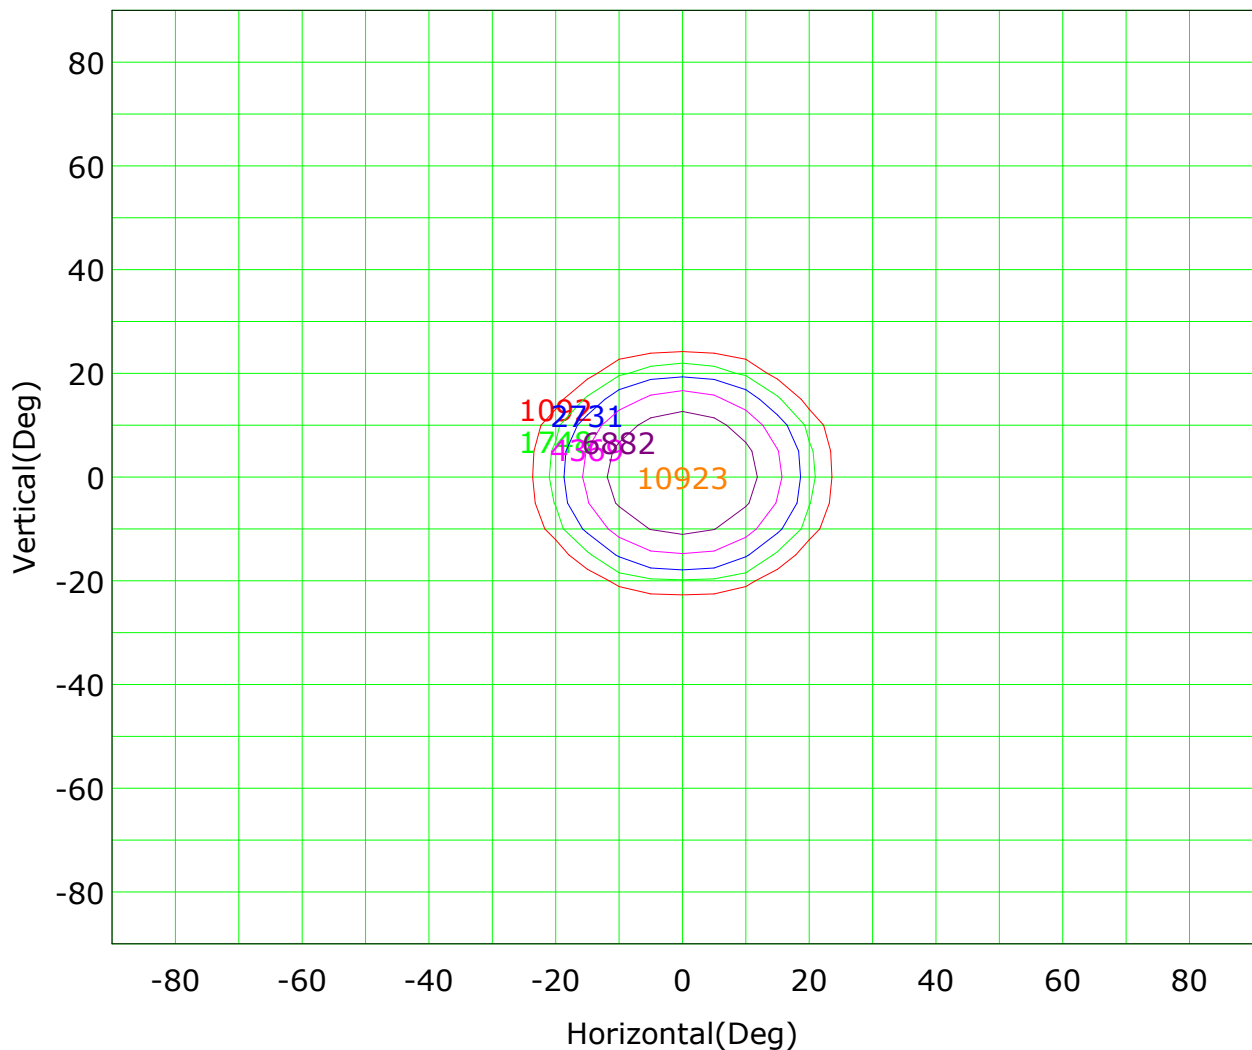

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

## IsoLux Plot

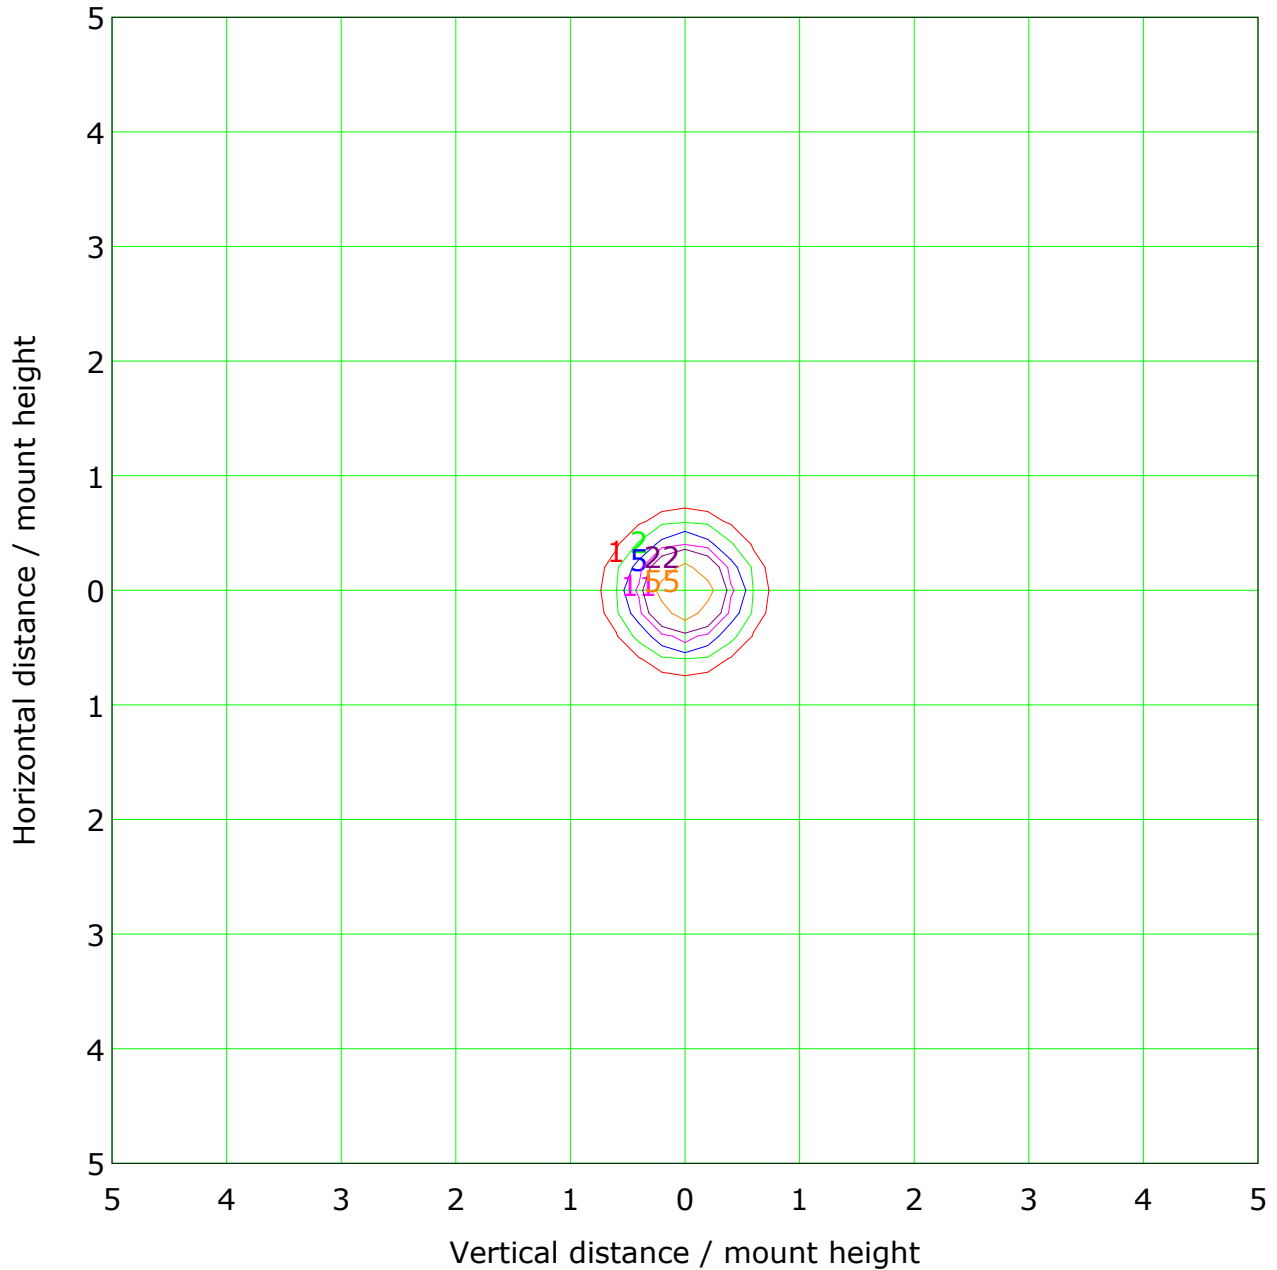

Mounting Height: 10m		Max Lux(100%): 109 lx	
— ( 1%):	1 lx	— ( 2%):	2 lx
— ( 5%):	5 lx	— ( 10%):	11 lx
— ( 20%):	22 lx	— ( 50%):	55 lx
— (100%):	109 lx		

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m


Humidity:

Inspector:

## Illuminance at a Distance

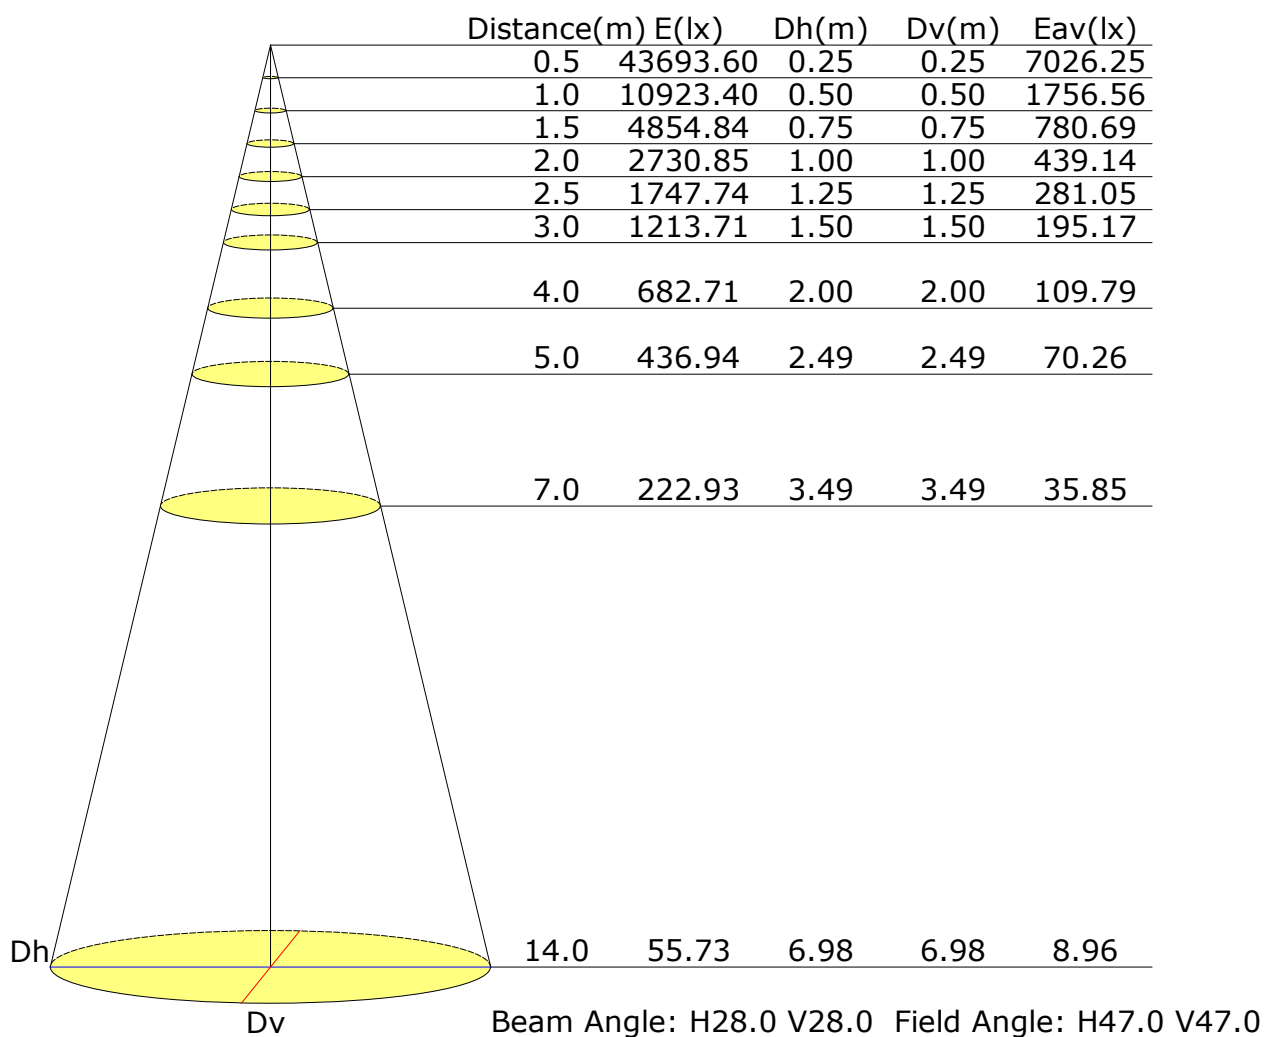

## Vertical IsoLux Plot

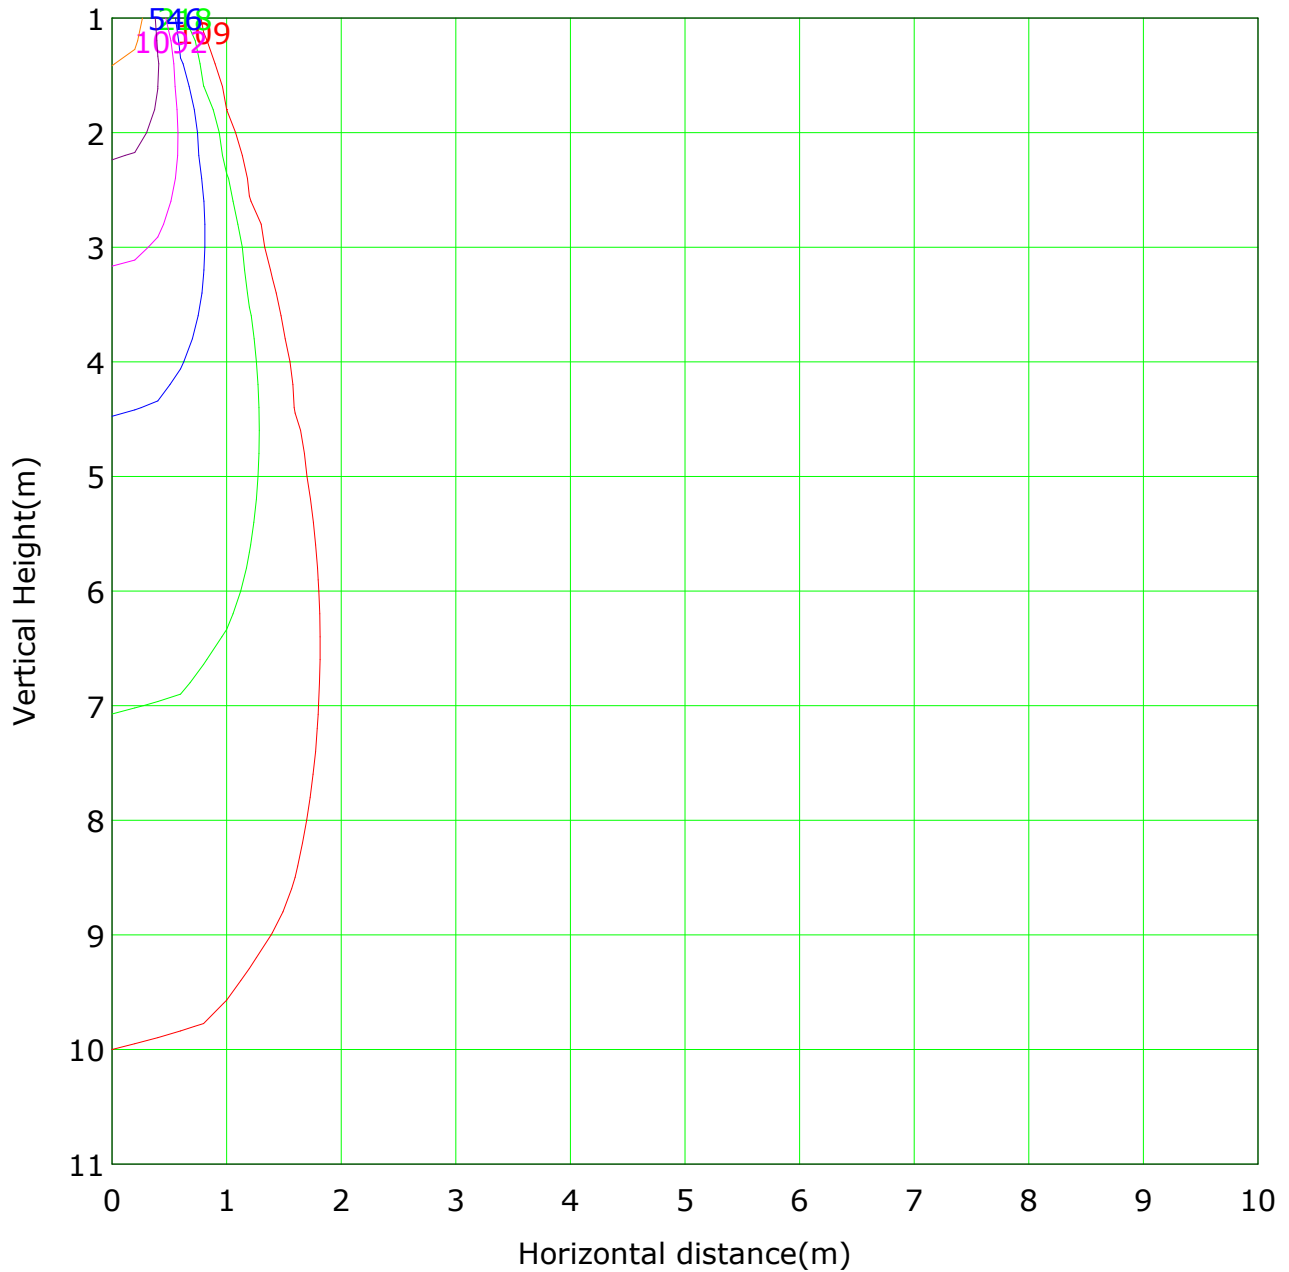


Lowest(m): 1m    Highest(m): 11    Max Lux: 10923

( 1%): 109 lx	( 2%): 218 lx
( 5%): 546 lx	( 10%): 1092 lx
( 20%): 2185 lx	( 50%): 5462 lx
(100%): 10923 lx	

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## The average illuminance effective figure

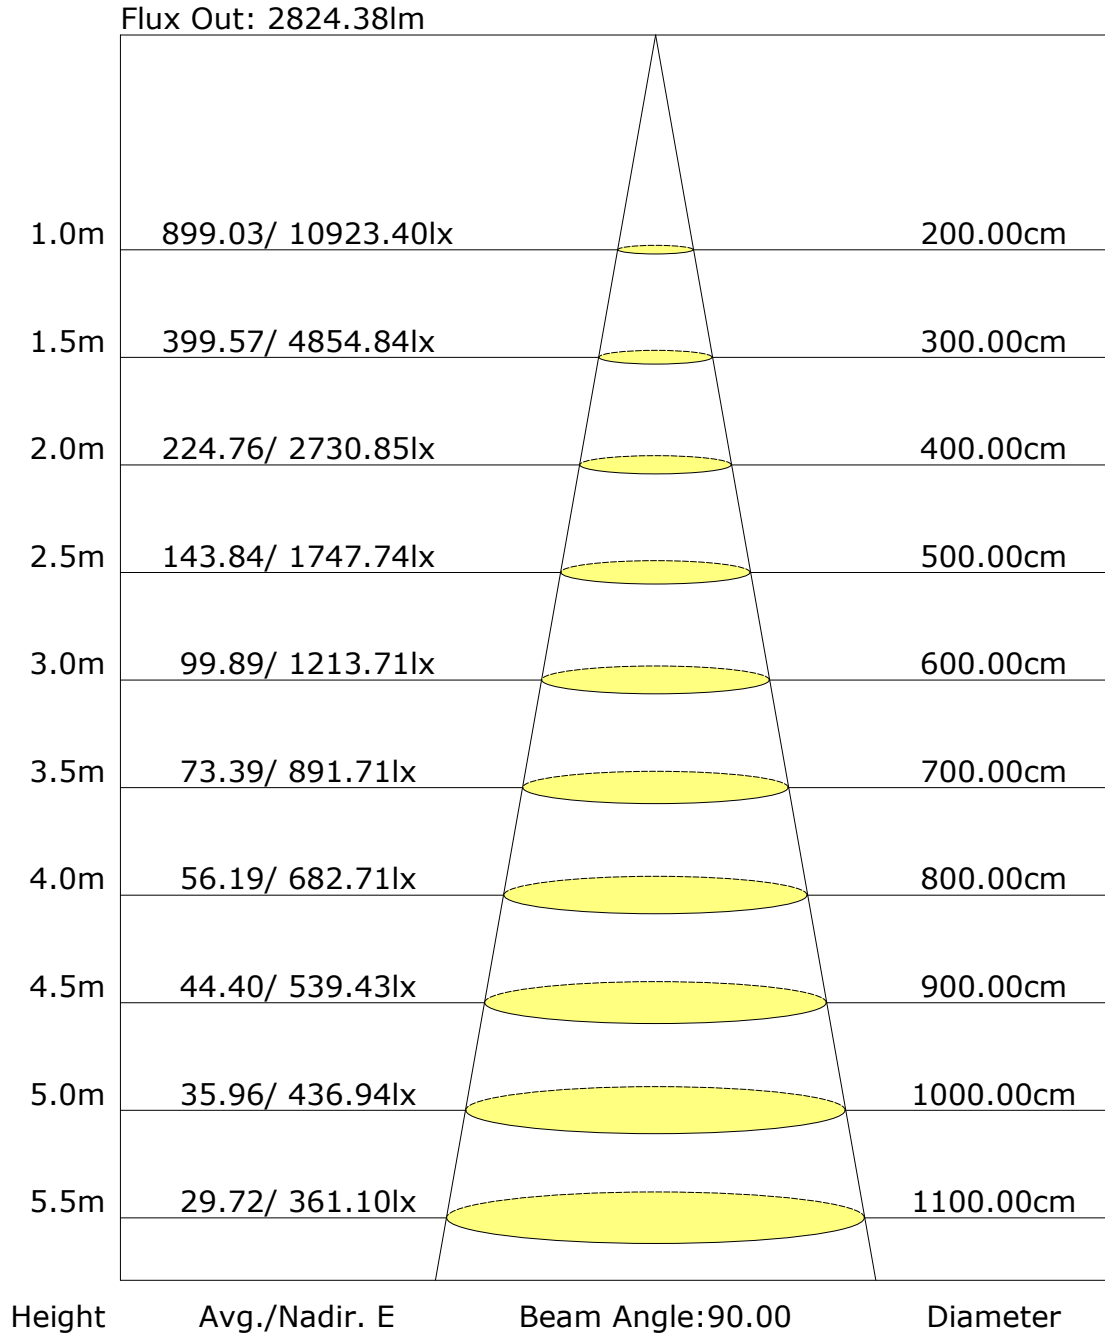

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:



## Unit: cd

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector: