




AXORA | SPINE Series Magnetic Track Lighting Module

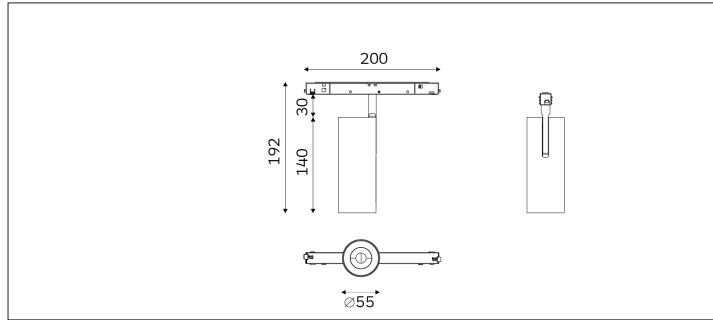

Light Distribution	AX-MG-SP-25W-055
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	20D/31D/43D/52D
Track	Low Voltage Track
Connected Load	25W
Luminous Flux Of The Luminaire	2615lm
Luminaire Efficacy	108lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.6Kg
Technical Region	Input 48V

Light Beam Talbe		
h(m)	E(lx)	D(m)
		20°
1.0	13471	0.36
2.0	3367	0.71
3.0	1496	1.07
4.0	481	1.43
5.0	538	1.79

It is an individual solution with a high degree of flexibility. all inserts are mounted completely without tools and held within the profile by a magnetic force. With just one flick of the wrist, you can adjust the inserts as needed at any time to set the scene for your desired object. Application areas: residential, hotel, restaurants, retail and other high-end places.