

Report No.:AX-DL-DE-15W-055

Test Time: 2025-09-28 16:05

Luminaire Property

Luminaire Manufacturer:

Luminaire Description: 15D

Luminous Width (mm): -45

Current: 0.114 A

Power Factor: 0.536

Luminous Length (mm): -45

Voltage: 224.9 V

Power: 13.80 W

Photometric Results

CIE Class: Direct

Measurement Flux: 1141.9 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H25.2

Vertical Diffuse Angle(50%): V25.2

Luminaire Efficacy Rating (LER): 82.80

Max. Intensity: 4066.91 cd

S/MH(C0/C180): 0.43

Total Rated Lamp Lumens: 1141.9 lm

Efficiency: 100%


Upward Ratio: 0%

Central Intensity: 4025.52 cd


Pos of Max. Intensity: H0 V2

S/MH(C90/C270): 0.43

Picture Of Luminaire



Luminous Intensity Distribution Curve

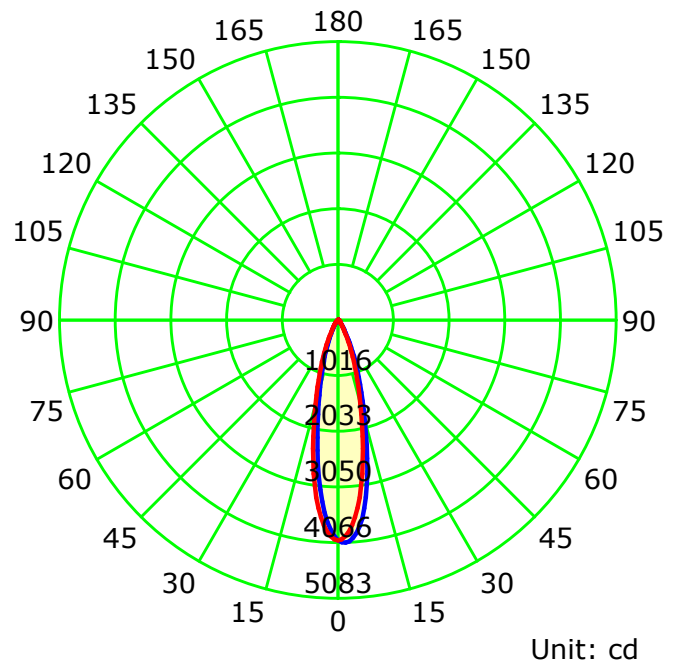

— C0-C180 — C90-C270

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0



Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

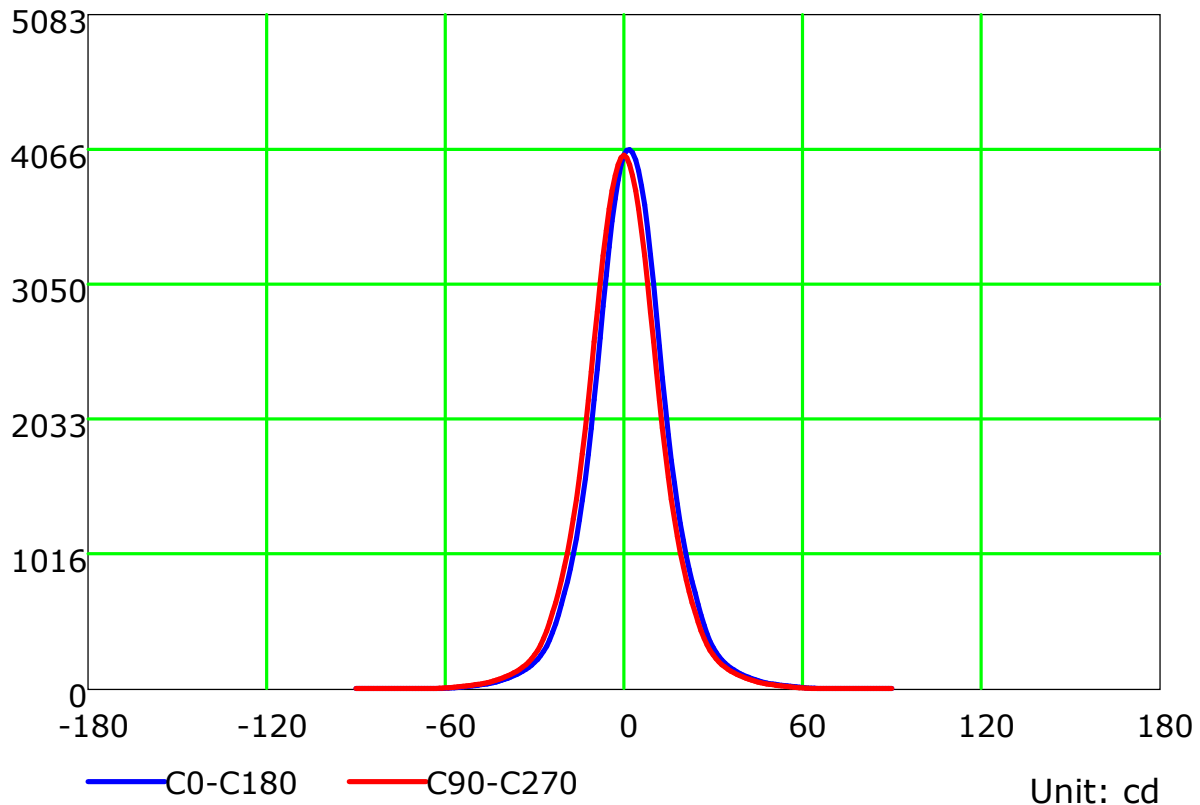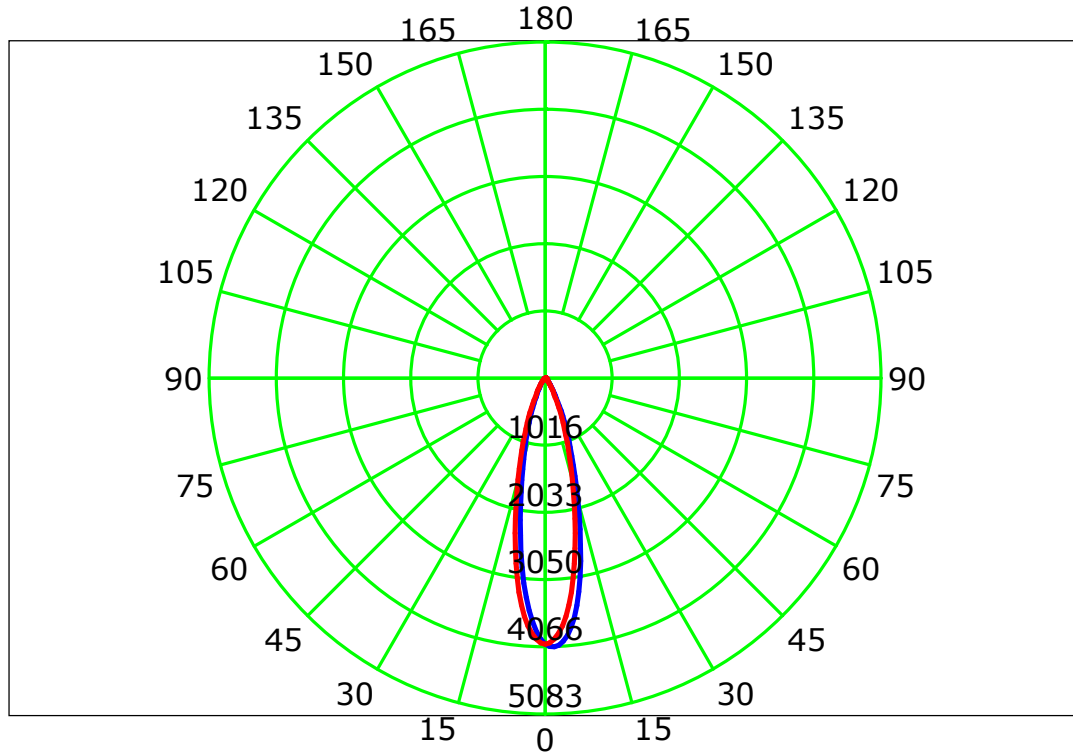

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd/klm)

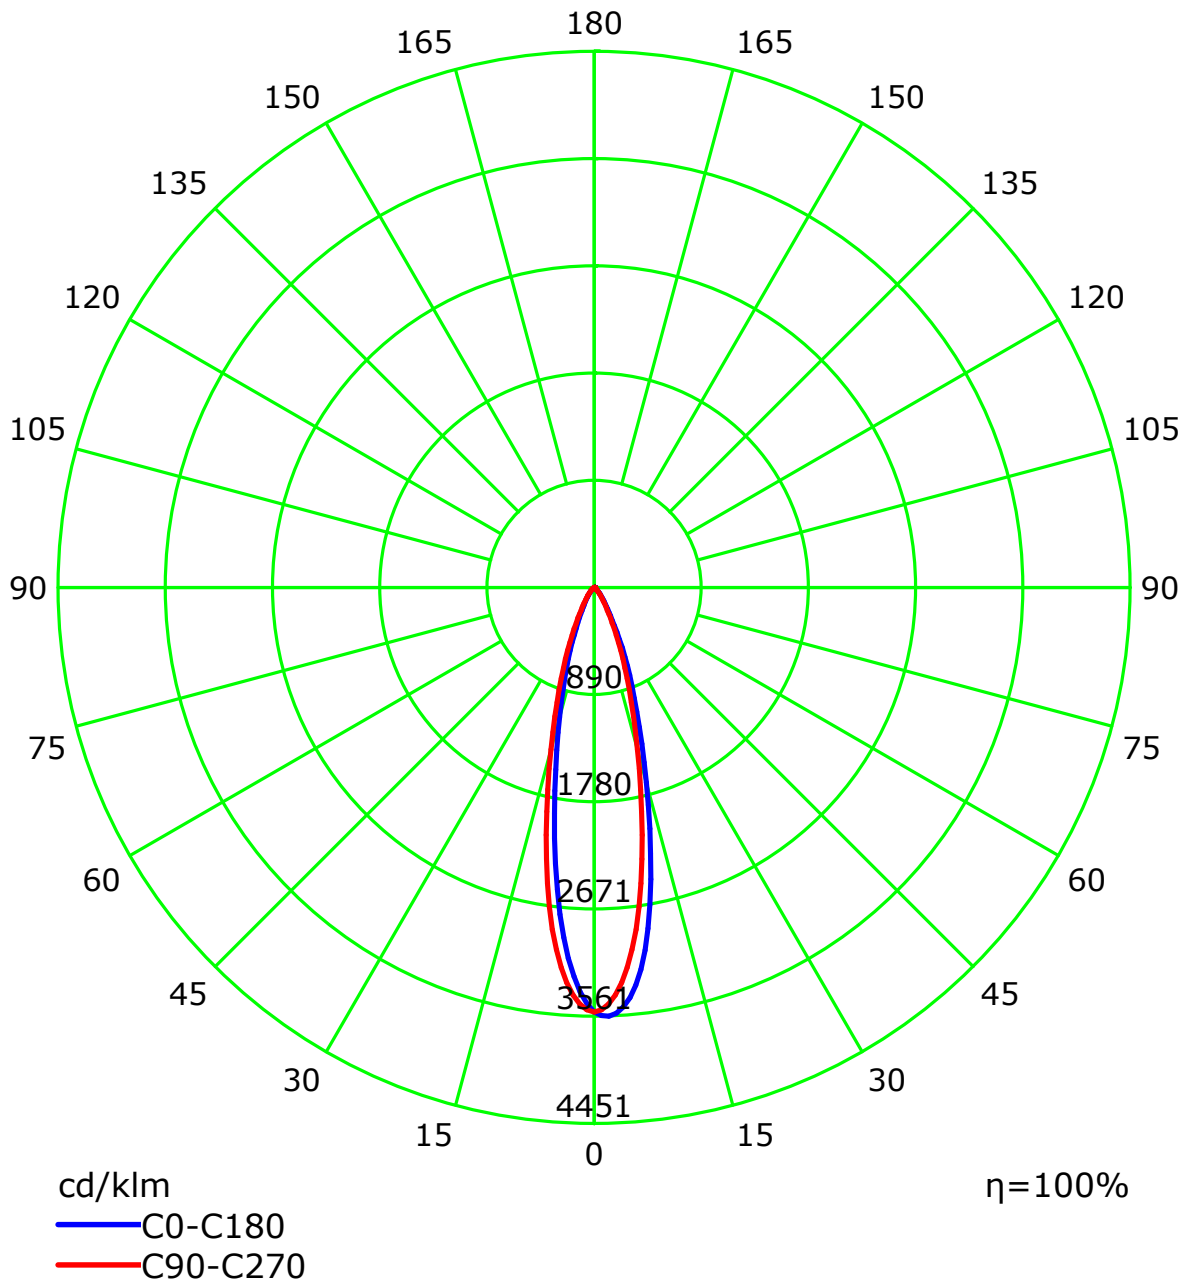

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Isocandela (rectangle)

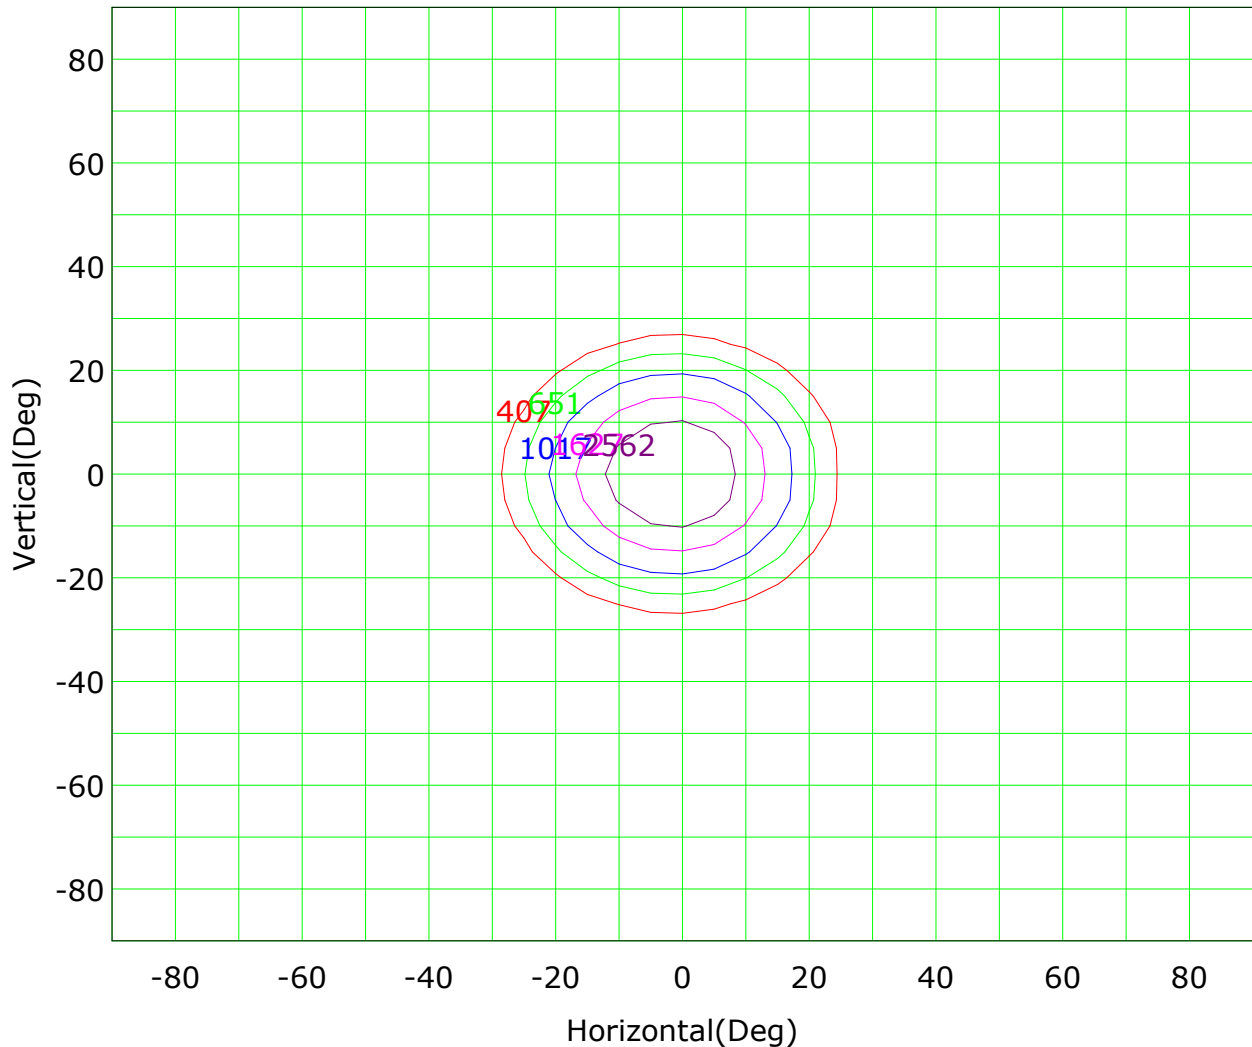

Imax (100%): 4067 cd

(10%): 407 cd	(16%): 651 cd
(25%): 1017 cd	(40%): 1627 cd
(63%): 2562 cd	(100%): 4067 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:

IsoLux Plot

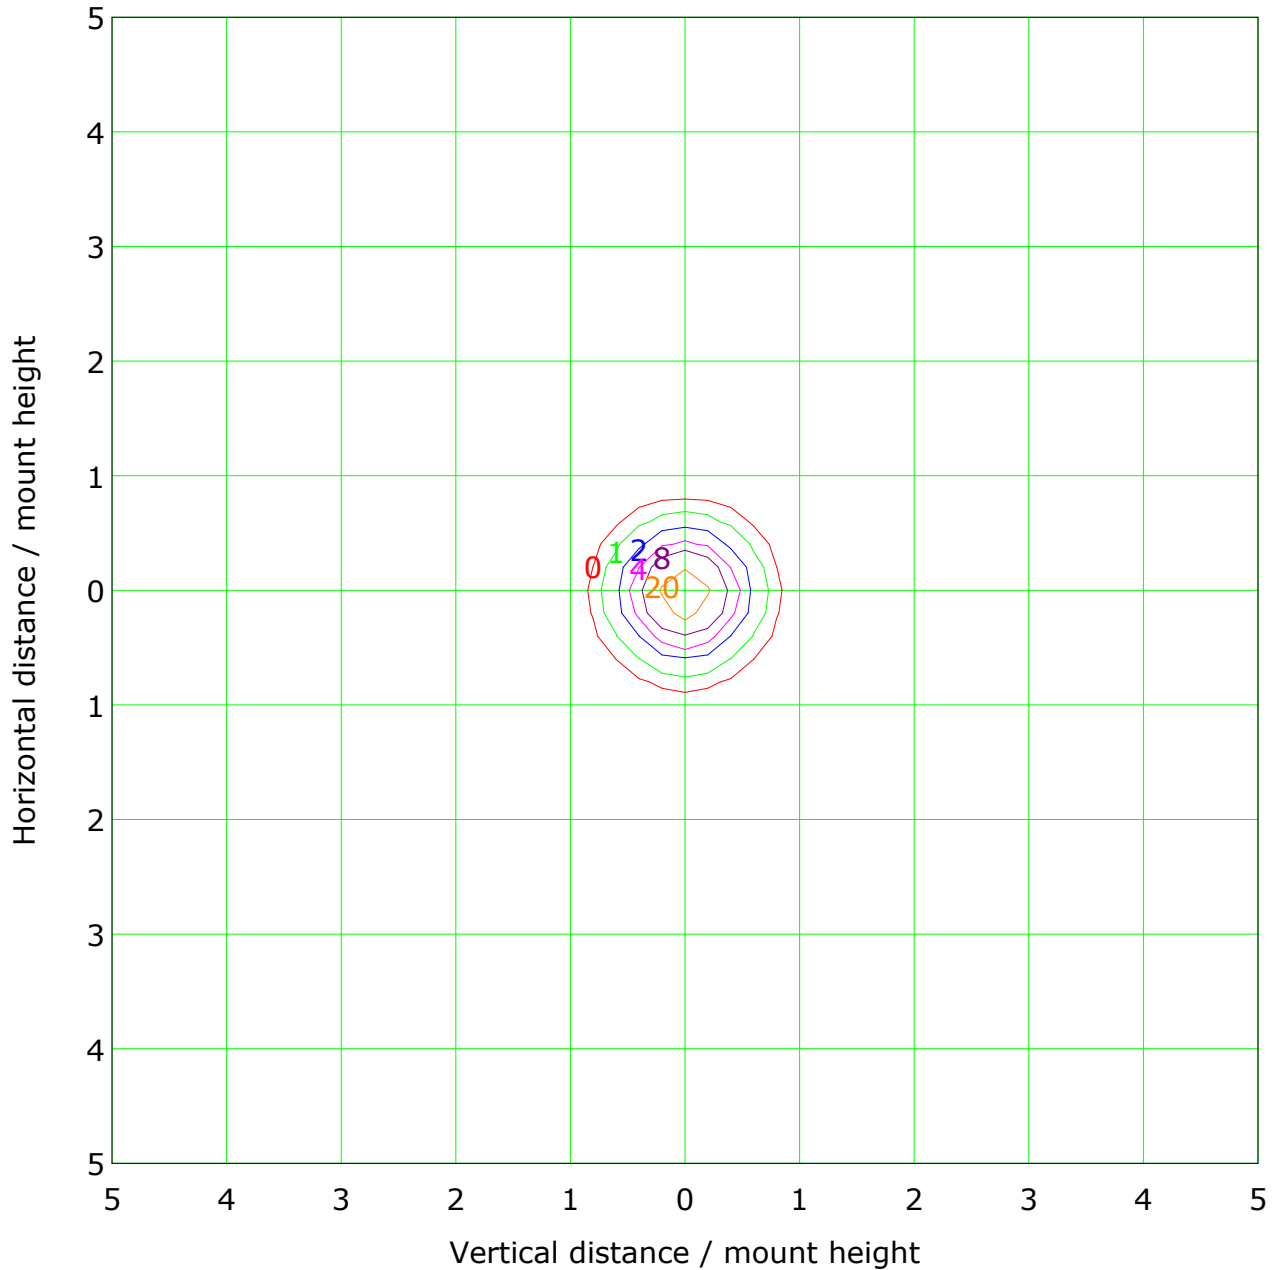

Mounting Height: 10.0m Max Lux(100%): 40.6 lx

(1%): 0.4 lx	(2%): 0.8 lx
(5%): 2.0 lx	(10%): 4.1 lx
(20%): 8.1 lx	(50%): 20.3 lx
(100%): 40.6 lx	

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 2.905 m


Humidity:

Inspector:

Illuminance at a Distance

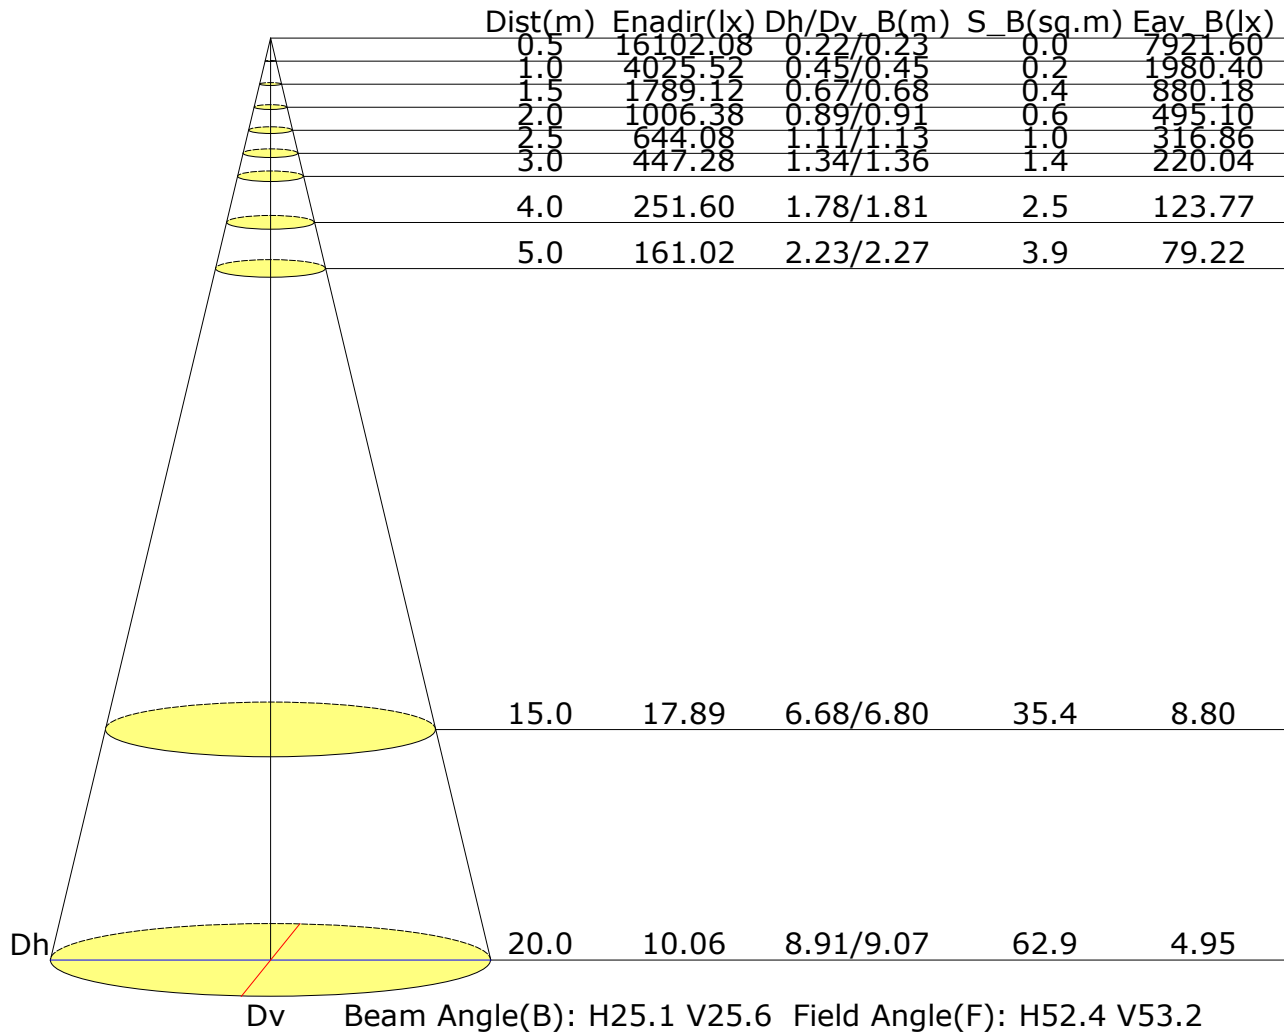

Vertical IsoLux Plot

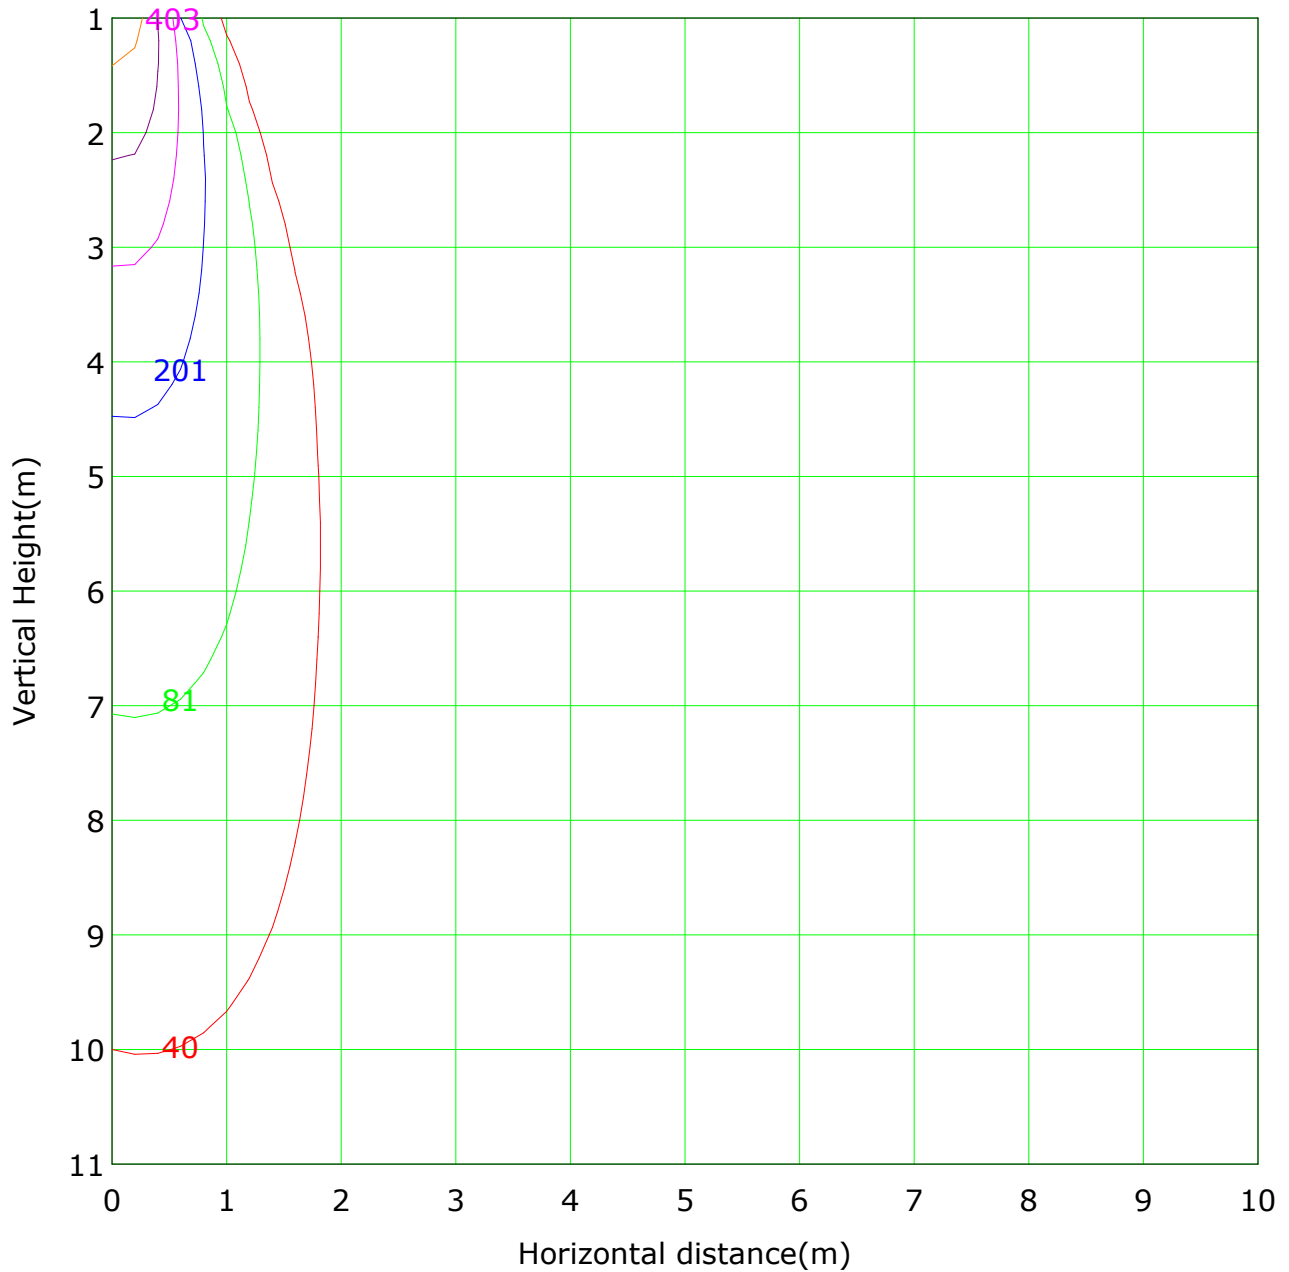

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 4025.5 lx
 (1%): 40.3 lx (2%): 80.5 lx
 (5%): 201.3 lx (10%): 402.6 lx
 (20%): 805.1 lx (50%): 2012.8 lx
 (100%): 4025.5 lx


C Plane (°): 0.0-180.0: 180.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°): 0.0-90.0: 1.0
 Test Device: CHL-6E
 Distance: 2.905 m
 Humidity:
 Inspector:

Unit: lm

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

The Average Illuminance Effective Figure

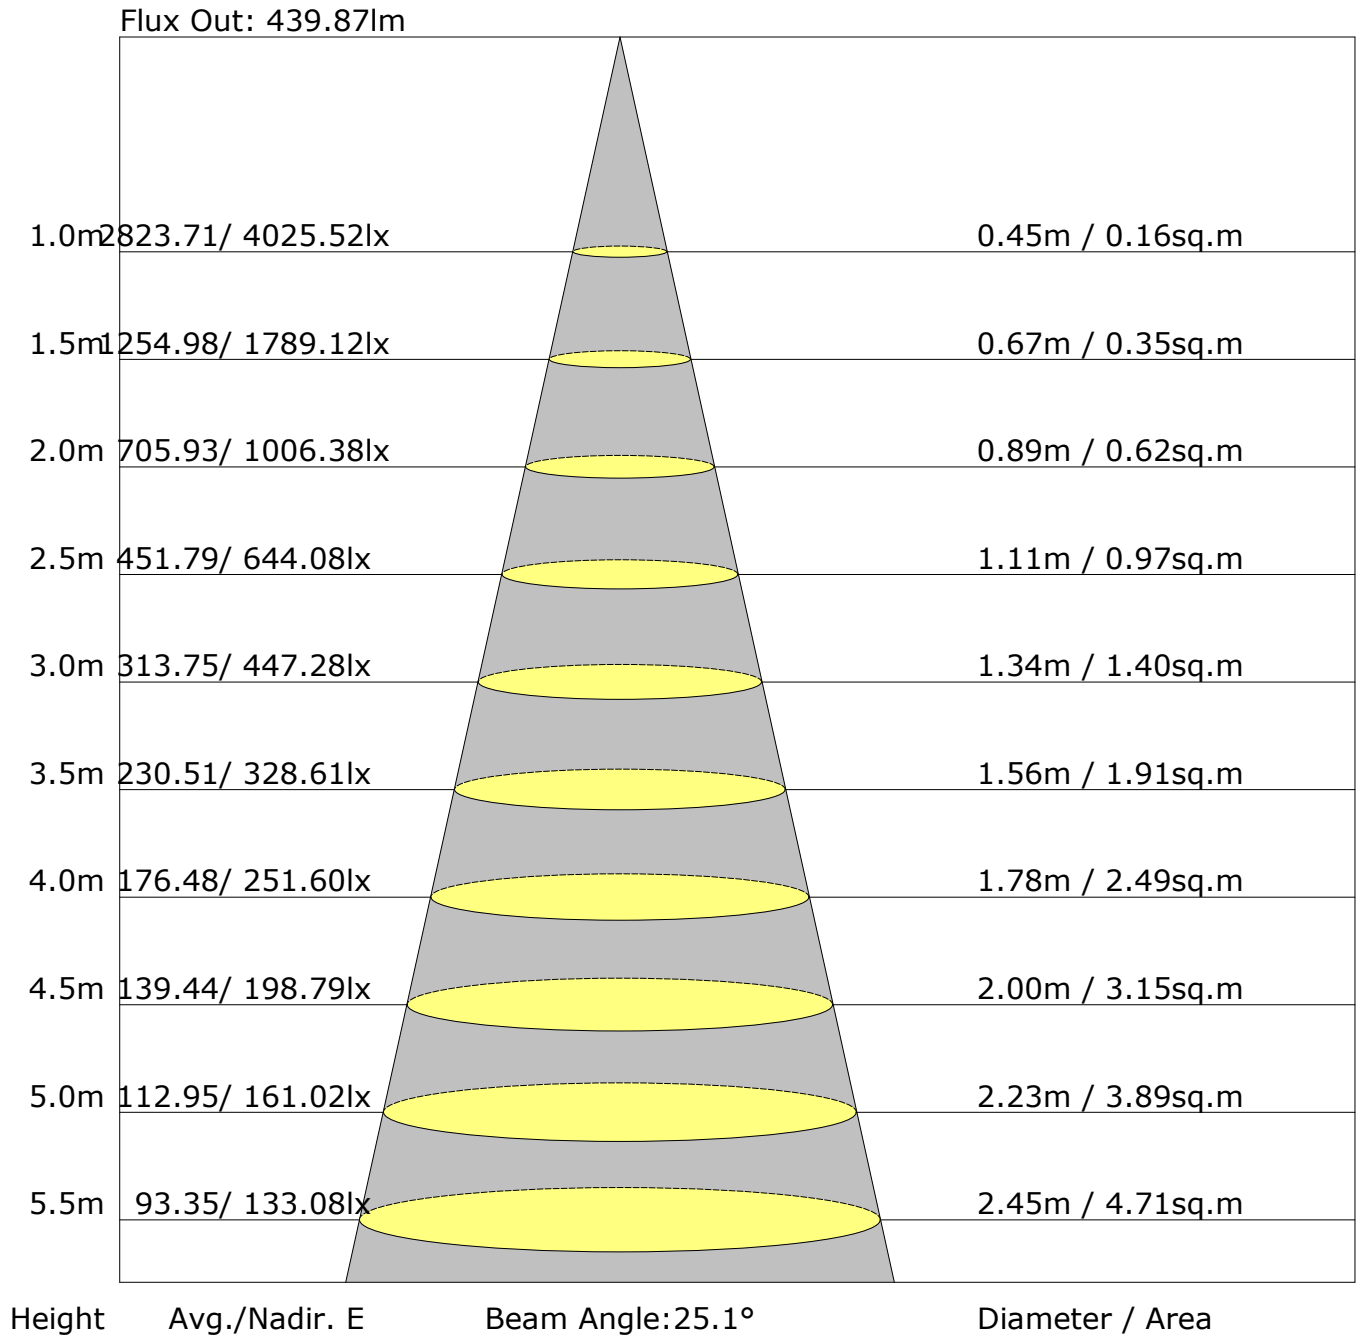

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	19.1	19.8	19.4	20.0	20.2	18.4	19.1	18.6	19.3	19.5
3H	19.0	19.6	19.3	19.9	20.1	18.2	18.9	18.5	19.1	19.3
4H	18.9	19.5	19.2	19.8	20.0	18.2	18.8	18.5	19.0	19.3
6H	18.8	19.4	19.2	19.7	20.0	18.1	18.6	18.4	18.9	19.2
8H	18.8	19.3	19.1	19.6	19.9	18.1	18.6	18.4	18.9	19.2
12H	18.8	19.3	19.1	19.6	19.9	18.0	18.5	18.4	18.8	19.1
X=4H Y=2H	19.0	19.6	19.3	19.8	20.1	18.2	18.8	18.5	19.1	19.3
3H	18.8	19.3	19.2	19.6	19.9	18.1	18.6	18.4	18.9	19.2
4H	18.7	19.2	19.1	19.5	19.9	18.0	18.4	18.4	18.8	19.1
6H	18.6	19.0	19.0	19.4	19.8	17.9	18.3	18.3	18.7	19.1
8H	18.6	19.0	19.0	19.4	19.8	17.9	18.2	18.3	18.6	19.0
12H	18.5	18.9	19.0	19.3	19.7	17.8	18.1	18.3	18.6	19.0
X=8H Y=4H	18.6	19.0	19.0	19.4	19.8	17.9	18.2	18.3	18.6	19.0
6H	18.5	18.8	19.0	19.2	19.7	17.8	18.1	18.2	18.5	18.9
8H	18.5	18.7	18.9	19.2	19.6	17.7	18.0	18.2	18.4	18.9
12H	18.4	18.6	18.9	19.1	19.6	17.7	17.9	18.2	18.4	18.9
X=12H Y=4H	18.5	18.9	19.0	19.3	19.7	17.8	18.1	18.3	18.6	19.0
6H	18.5	18.7	18.9	19.2	19.6	17.7	18.0	18.2	18.4	18.9
8H	18.4	18.6	18.9	19.1	19.6	17.7	17.9	18.2	18.4	18.9
Variations with the observer position at spacings:										
S=1.0H	+3.5/-5.0					+3.4/-5.6				
S=1.5H	+6.1/-13.8					+5.9/-15.6				
S=2.0H	+8.1/-31.2					+7.9/-32.8				

Calculate in accordance with CIE Pub.117. The table is revised with 1142lm ($8\log(F/F_0) = 0.5$).

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

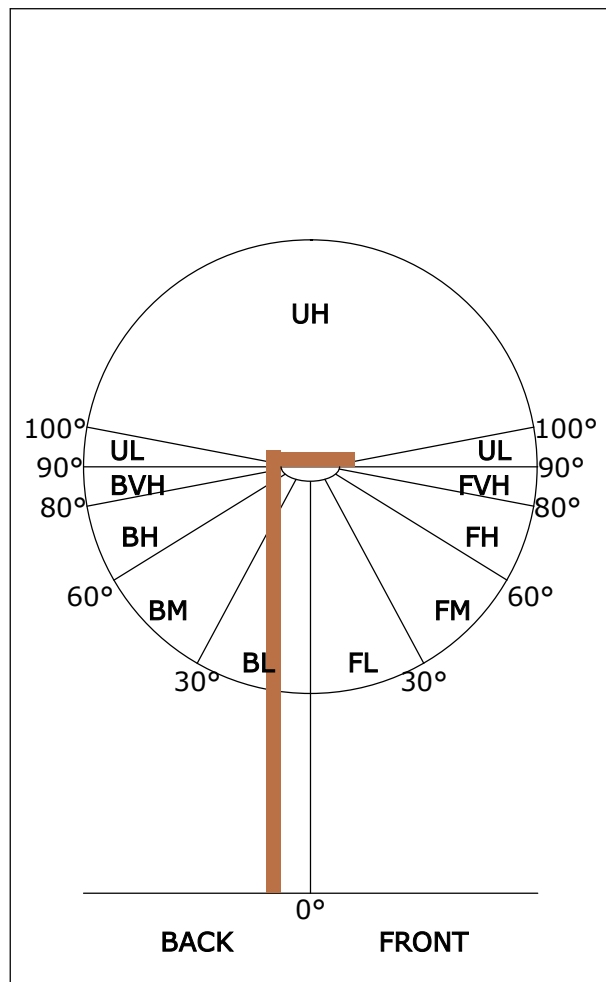

ZONE	LUMENS	% LAMP LUMENS
FORWARD LIGHT	623	54.6
FL (0°-30°)	540	47.3
FM (30°-60°)	82	7.2
FH (60°-80°)	1	0.1
FVH (80°-90°)	0	0.0
BACK LIGHT	519	45.4
BL (0°-30°)	451	39.5
BM (30°-60°)	67	5.9
BH (60°-80°)	0	0.0
BVH (80°-90°)	0	0.0
UP LIGHT	0	0.0
UL (90°-100°)	0	0.0
UH (100°-180°)	0	0.0
TRAPPED LIGHT	NA	NA

BUG(Backlight,Upight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B1 U0 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B1 U0 G0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	4015.5	3.8	3.8	0.34	0.34
1.0-2.0	3978.8	11.4	15.3	1.00	1.34
2.0-3.0	3910.9	18.7	34.0	1.64	2.97
3.0-4.0	3813.4	25.5	59.5	2.24	5.21
4.0-5.0	3687.5	31.7	91.2	2.78	7.99
5.0-6.0	3536.1	37.2	128.4	3.25	11.24
6.0-7.0	3360.6	41.7	170.1	3.65	14.90
7.0-8.0	3164.0	45.3	215.4	3.97	18.86
8.0-9.0	2951.1	47.8	263.2	4.19	23.05
9.0-10.0	2728.6	49.4	312.6	4.32	27.38
10.0-11.0	2503.2	50.0	362.6	4.38	31.76
11.0-12.0	2282.3	49.9	412.5	4.37	36.13
12.0-13.0	2070.2	49.1	461.7	4.30	40.43
13.0-14.0	1869.2	47.9	509.5	4.19	44.62
14.0-15.0	1682.4	46.2	555.7	4.05	48.67
15.0-16.0	1510.9	44.3	600.0	3.88	52.54
16.0-17.0	1355.3	42.2	642.2	3.70	56.24
17.0-18.0	1214.9	40.1	682.3	3.51	59.75
18.0-19.0	1088.1	37.9	720.1	3.32	63.06
19.0-20.0	973.2	35.6	755.8	3.12	66.18
20.0-21.0	868.9	33.4	789.1	2.92	69.11
21.0-22.0	774.8	31.1	820.3	2.73	71.83
22.0-23.0	689.5	28.9	849.2	2.53	74.37
23.0-24.0	610.7	26.7	875.9	2.34	76.71
24.0-25.0	536.3	24.4	900.3	2.14	78.84
25.0-26.0	468.3	22.1	922.4	1.94	80.78
26.0-27.0	407.8	20.0	942.4	1.75	82.52
27.0-28.0	354.5	17.9	960.3	1.57	84.10
28.0-29.0	309.2	16.2	976.5	1.42	85.51
29.0-30.0	271.5	14.7	991.2	1.28	86.80
30.0-31.0	240.3	13.4	1004.5	1.17	87.97
31.0-32.0	213.7	12.2	1016.8	1.07	89.04
32.0-33.0	191.0	11.3	1028.0	0.99	90.03
33.0-34.0	171.4	10.4	1038.4	0.91	90.94
34.0-35.0	154.2	9.6	1048.0	0.84	91.77
35.0-36.0	138.8	8.8	1056.8	0.77	92.55

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	125.1	8.2	1065.0	0.71	93.26
37.0-38.0	112.8	7.5	1072.5	0.66	93.92
38.0-39.0	101.8	7.0	1079.5	0.61	94.53
39.0-40.0	92.0	6.4	1085.9	0.56	95.09
40.0-41.0	82.9	5.9	1091.8	0.52	95.61
41.0-42.0	74.5	5.4	1097.2	0.47	96.08
42.0-43.0	66.9	5.0	1102.1	0.43	96.52
43.0-44.0	59.8	4.5	1106.7	0.40	96.91
44.0-45.0	53.2	4.1	1110.8	0.36	97.27
45.0-46.0	47.6	3.7	1114.5	0.33	97.60
46.0-47.0	42.7	3.4	1117.9	0.30	97.89
47.0-48.0	38.1	3.1	1120.9	0.27	98.16
48.0-49.0	34.1	2.8	1123.7	0.25	98.41
49.0-50.0	30.7	2.6	1126.3	0.22	98.63
50.0-51.0	27.6	2.3	1128.6	0.20	98.84
51.0-52.0	24.6	2.1	1130.8	0.19	99.02
52.0-53.0	21.9	1.9	1132.7	0.17	99.19
53.0-54.0	19.3	1.7	1134.4	0.15	99.34
54.0-55.0	16.7	1.5	1135.8	0.13	99.47
55.0-56.0	14.4	1.3	1137.2	0.11	99.58
56.0-57.0	12.3	1.1	1138.3	0.10	99.68
57.0-58.0	10.1	0.9	1139.2	0.08	99.76
58.0-59.0	8.1	0.8	1140.0	0.07	99.83
59.0-60.0	6.2	0.6	1140.6	0.05	99.88
60.0-61.0	4.6	0.4	1141.0	0.04	99.92
61.0-62.0	3.3	0.3	1141.3	0.03	99.95
62.0-63.0	2.2	0.2	1141.5	0.02	99.97
63.0-64.0	1.5	0.2	1141.7	0.01	99.98
64.0-65.0	1.0	0.1	1141.8	0.01	99.99
65.0-66.0	0.5	0.0	1141.8	0.00	99.99
66.0-67.0	0.1	0.0	1141.8	0.00	99.99
67.0-68.0	0.1	0.0	1141.8	0.00	99.99
68.0-69.0	0.1	0.0	1141.9	0.00	100.00
69.0-70.0	0.0	0.0	1141.9	0.00	100.00
70.0-71.0	0.0	0.0	1141.9	0.00	100.00
71.0-72.0	0.1	0.0	1141.9	0.00	100.00

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:


Gamma Plane (°):0.0-90.0:1.0

Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:



Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C180.0								
G0.0	4025.5	4025.5								
G1.0	4061.2	3949.7								
G2.0	4066.9	3837.3								
G3.0	4044.1	3695.5								
G4.0	3987.8	3526.1								
G5.0	3905.1	3331.0								
G6.0	3791.7	3116.5								
G7.0	3650.3	2883.9								
G8.0	3475.1	2646.6								
G9.0	3273.8	2409.0								
G10.0	3053.0	2178.7								
G11.0	2817.9	1963.3								
G12.0	2581.7	1766.3								
G13.0	2347.8	1584.9								
G14.0	2124.3	1420.0								
G15.0	1914.5	1270.7								
G16.0	1724.0	1134.4								
G17.0	1550.8	1012.1								
G18.0	1392.6	904.0								
G19.0	1248.1	807.6								
G20.0	1116.0	720.9								
G21.0	1000.5	638.4								
G22.0	900.1	560.1								
G23.0	808.3	489.3								
G24.0	721.6	423.6								
G25.0	632.8	367.1								
G26.0	553.1	320.3								
G27.0	476.6	281.4								
G28.0	411.0	248.9								
G29.0	355.6	221.4								
G30.0	310.9	198.3								
G31.0	273.4	178.4								
G32.0	241.9	161.1								
G33.0	215.4	145.7								
G34.0	192.9	131.7								
G35.0	173.3	118.9								
G36.0	155.6	107.4								

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C180.0								
G37.0	140.6	96.6								
G38.0	126.7	87.3								
G39.0	114.5	78.9								
G40.0	103.8	70.8								
G41.0	93.7	63.2								
G42.0	84.6	56.6								
G43.0	76.2	50.2								
G44.0	68.7	44.0								
G45.0	61.4	38.9								
G46.0	54.5	35.5								
G47.0	48.3	32.3								
G48.0	42.7	29.1								
G49.0	38.5	26.1								
G50.0	35.0	23.2								
G51.0	31.9	20.3								
G52.0	28.8	17.6								
G53.0	25.9	15.1								
G54.0	23.2	12.9								
G55.0	20.3	10.6								
G56.0	17.9	8.9								
G57.0	15.4	7.0								
G58.0	12.7	5.3								
G59.0	10.4	3.9								
G60.0	7.8	2.8								
G61.0	5.9	2.0								
G62.0	4.5	0.8								
G63.0	3.6	0.0								
G64.0	2.5	0.0								
G65.0	1.4	0.0								
G66.0	0.4	0.0								
G67.0	0.1	0.0								
G68.0	0.1	0.0								
G69.0	0.1	0.0								
G70.0	0.0	0.0								
G71.0	0.1	0.0								
G72.0	0.1	0.0								
G73.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:


Gamma Plane (°):0.0-90.0:1.0

Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:



Unit: cd

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector: