

Report No.: AX-MG-SP-15W-045

Test Time: 2023-09-07 11:07

Luminaire Property

Luminaire Category: Bridgelux V6 3000K CRI90

Voltage: 217.9 V

Current: 0.114 A

Power: 14.30 W

Power Factor: 0.568

Photometric Results

CIE Class: Direct

Measurement Flux: 1049.2 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H24.2

Vertical Diffuse Angle(50%): V24.2

Luminaire Efficacy Rating (LER): 73

Max. Intensity: 5232.25 cd

Total Rated Lamp Lumens: 1049.2 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 5232.25 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

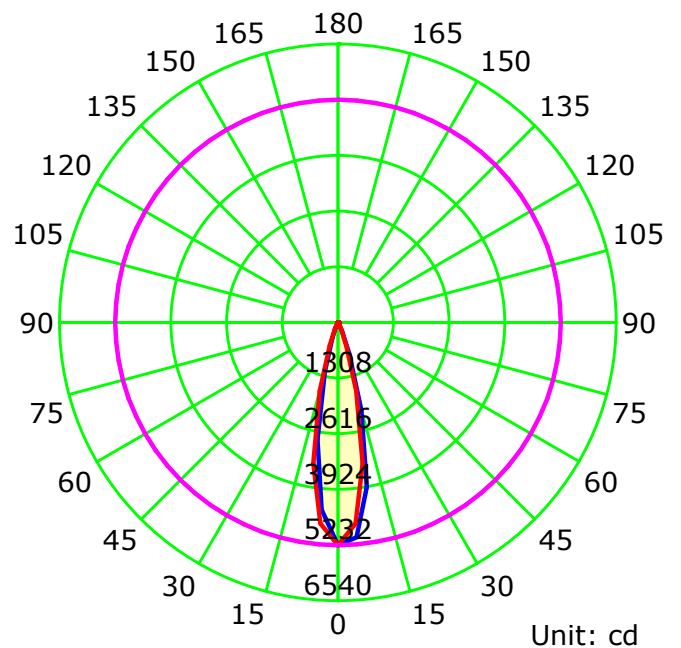

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

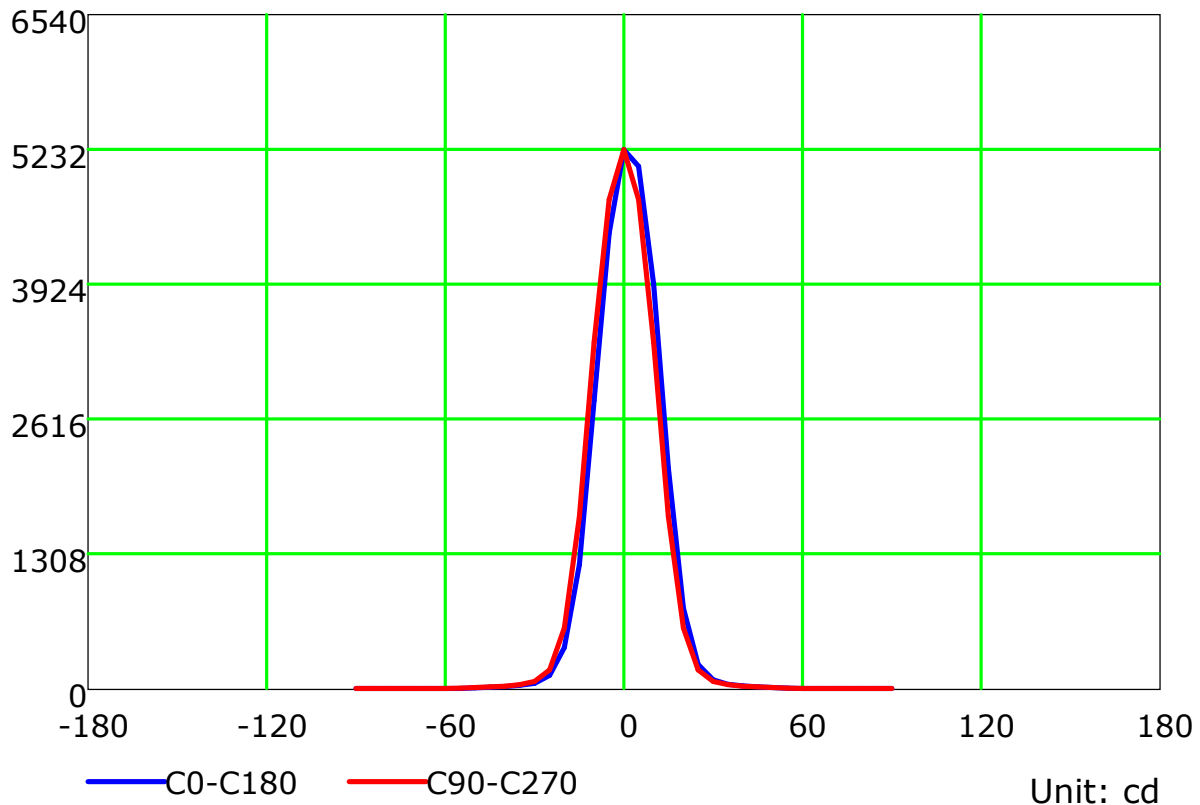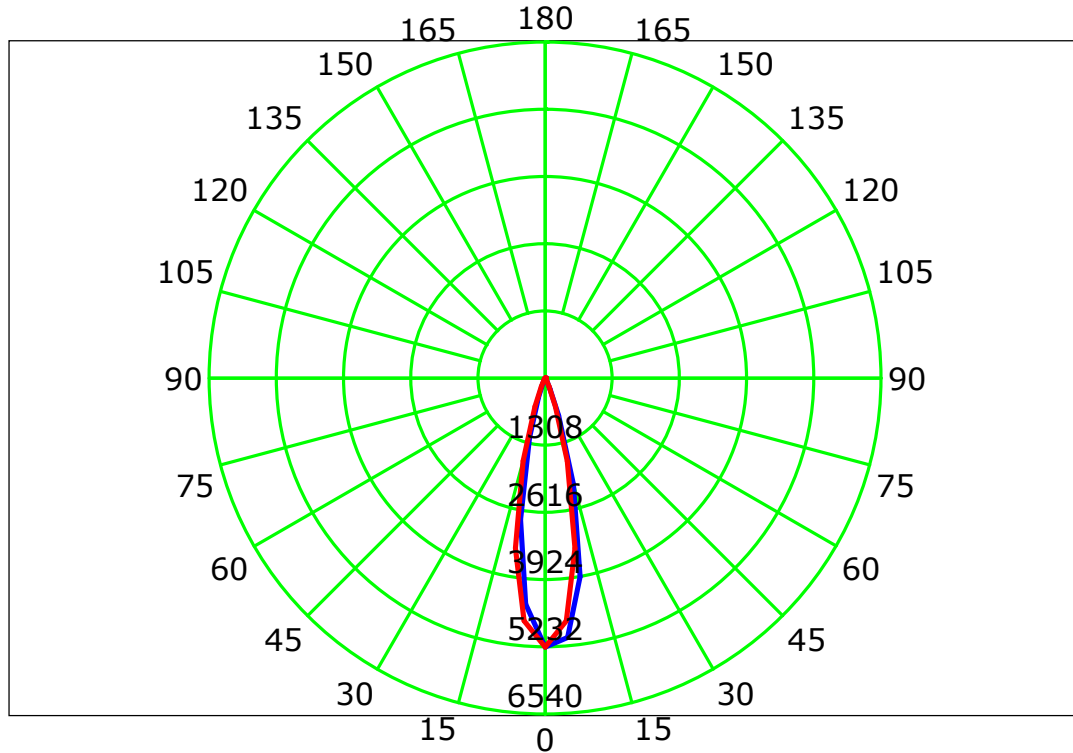

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Isocandela (rectangle)

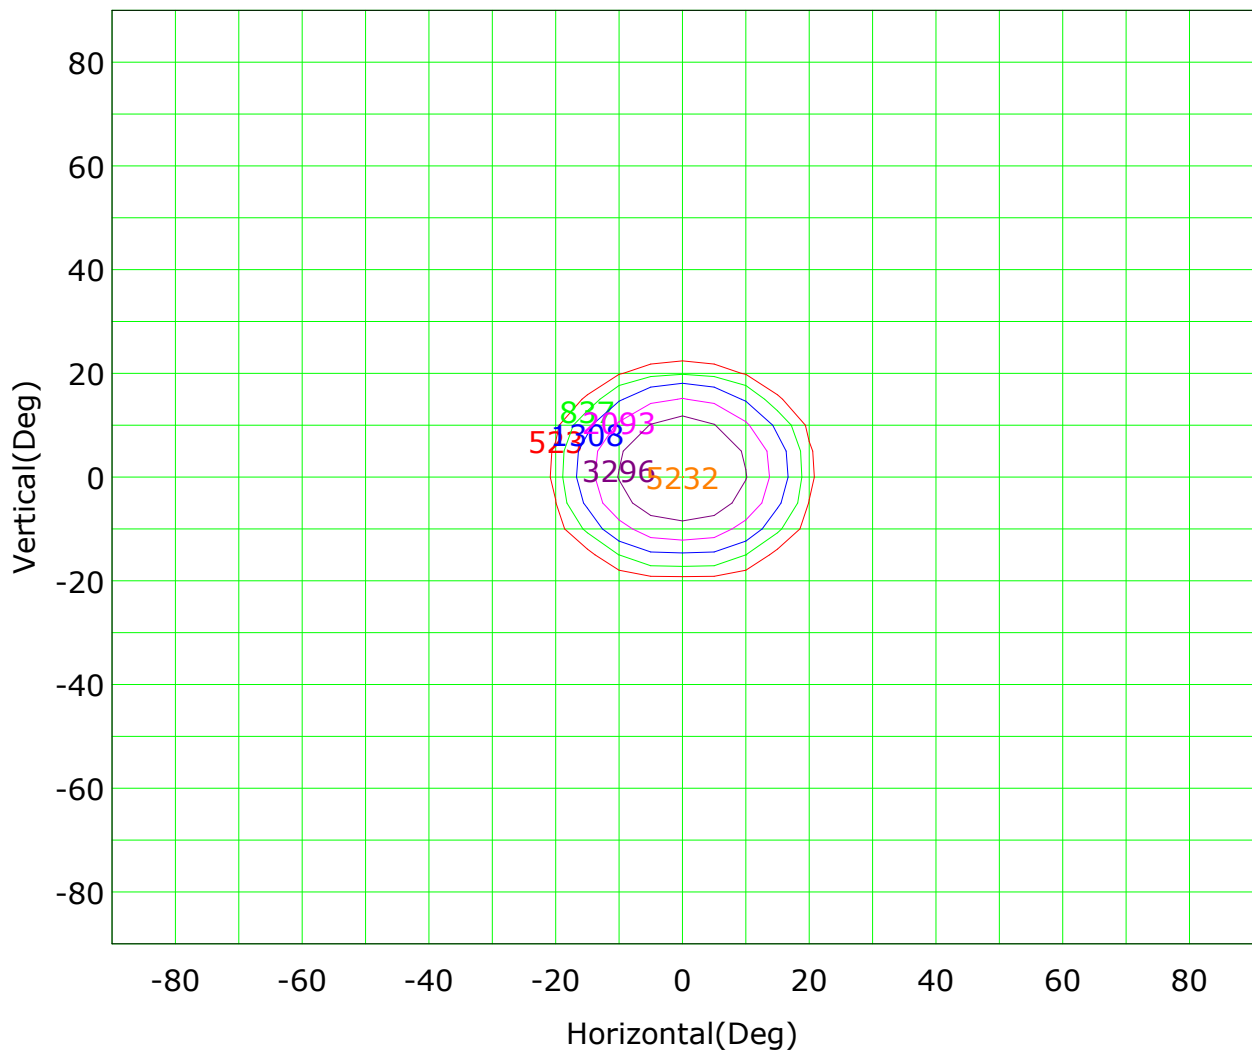

Imax (100%): 5232 cd

(10%): 523 cd	(16%): 837 cd
(25%): 1308 cd	(40%): 2093 cd
(63%): 3296 cd	(100%): 5232 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

IsoLux Plot

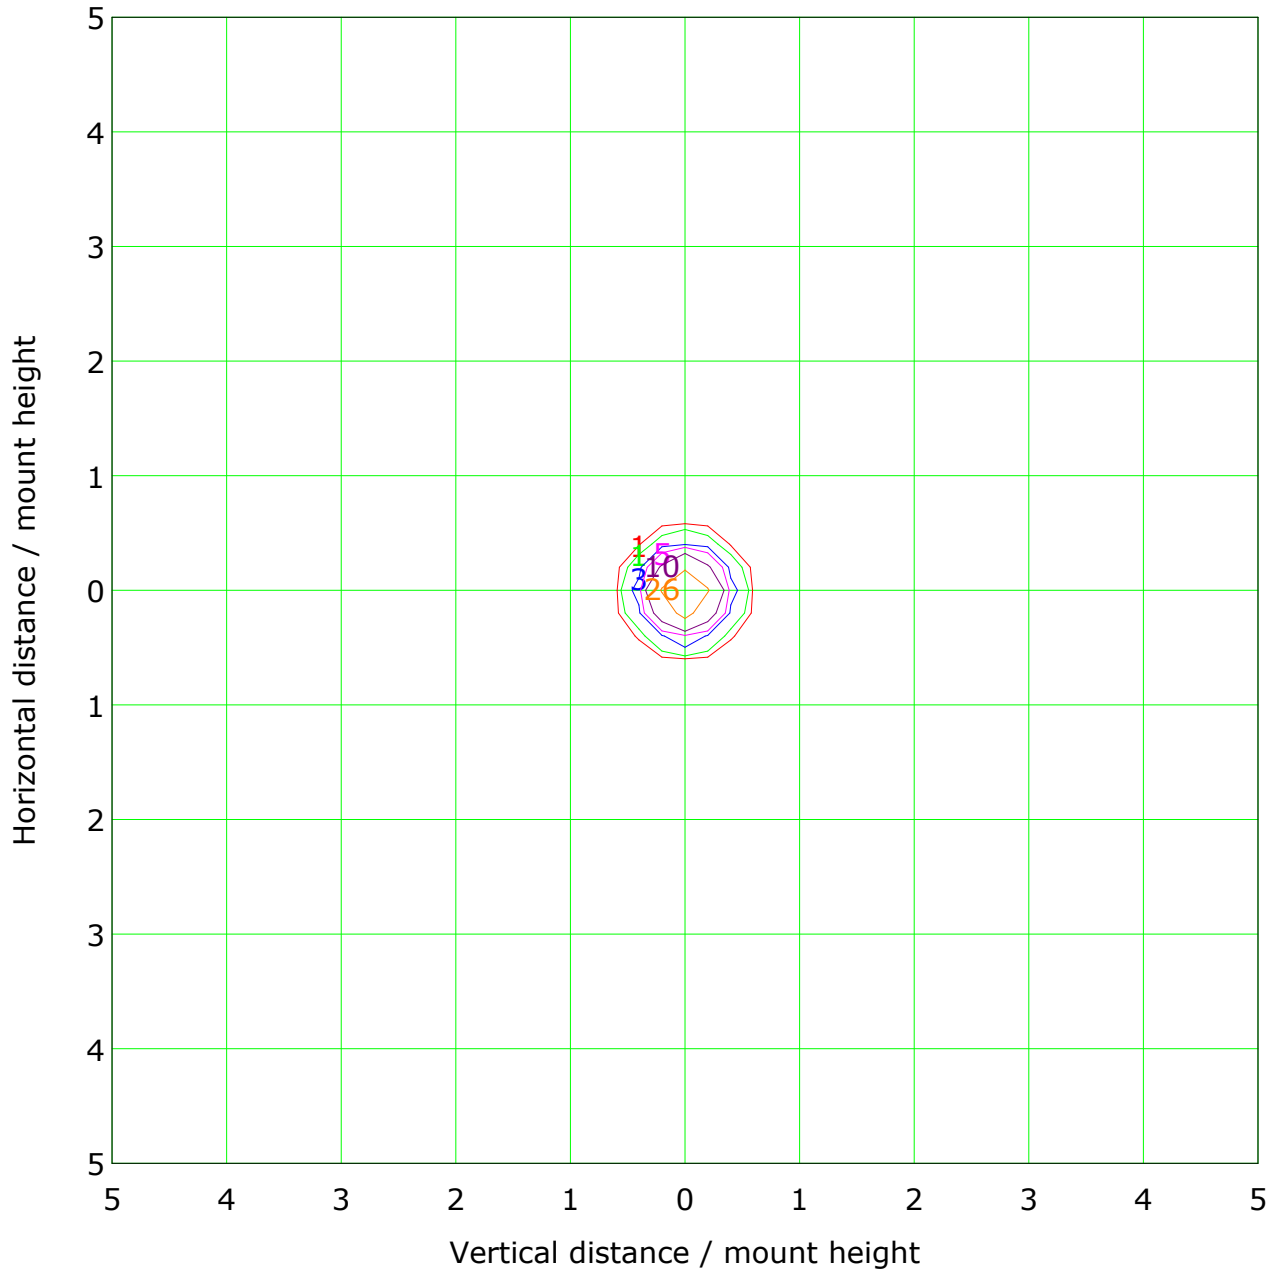

Mounting Height: 10m		Max Lux(100%): 52 lx	
(1%):	1 lx	(2%):	1 lx
(5%):	3 lx	(10%):	5 lx
(20%):	10 lx	(50%):	26 lx
(100%):	52 lx		

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m


Humidity:

Inspector:

Illuminance at a Distance

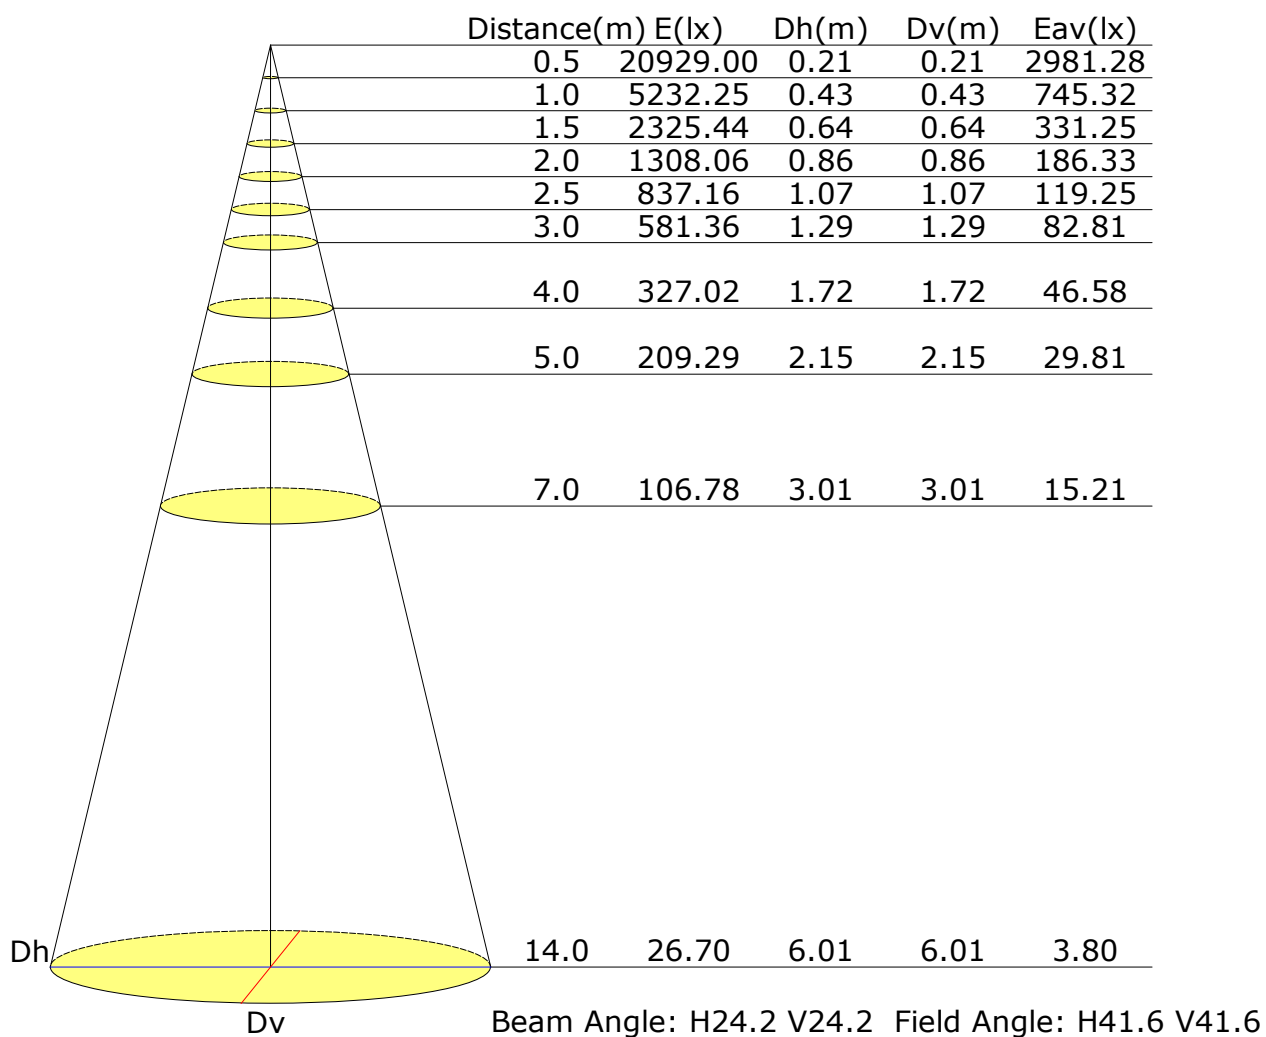

Vertical IsoLux Plot

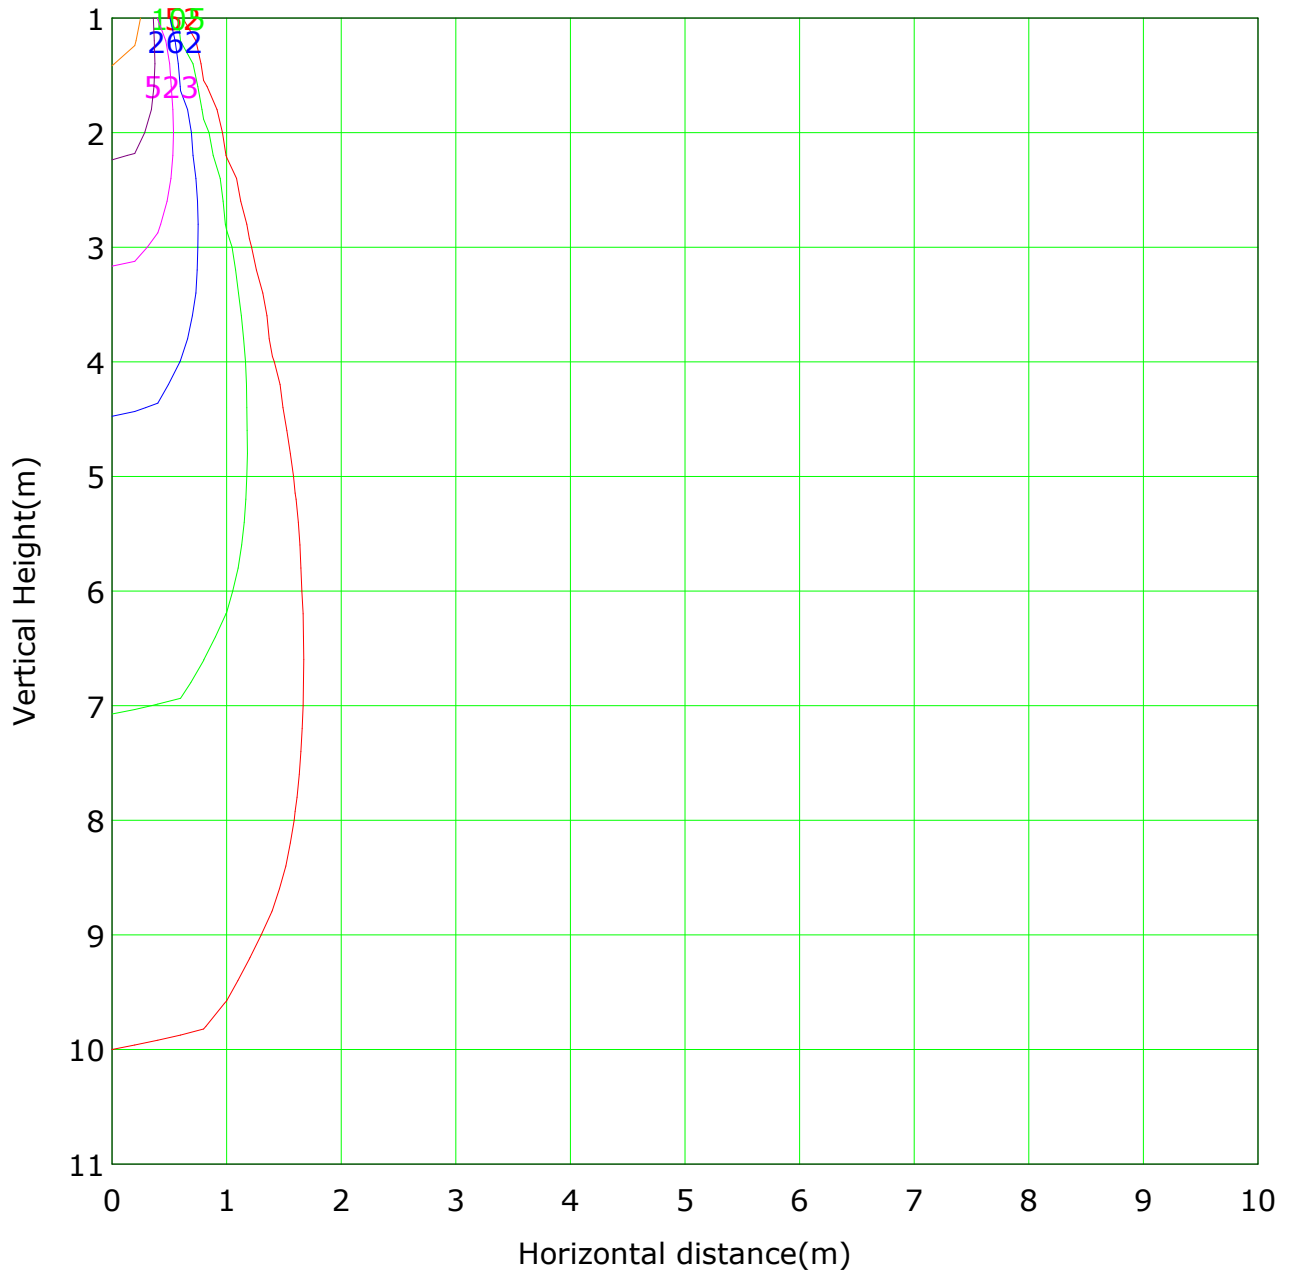


Lowest(m): 1m Highest(m): 11 Max Lux: 5232

(1%): 52 lx	(2%): 105 lx
(5%): 262 lx	(10%): 523 lx
(20%): 1046 lx	(50%): 2616 lx
(100%): 5232 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

The average illuminance effective figure

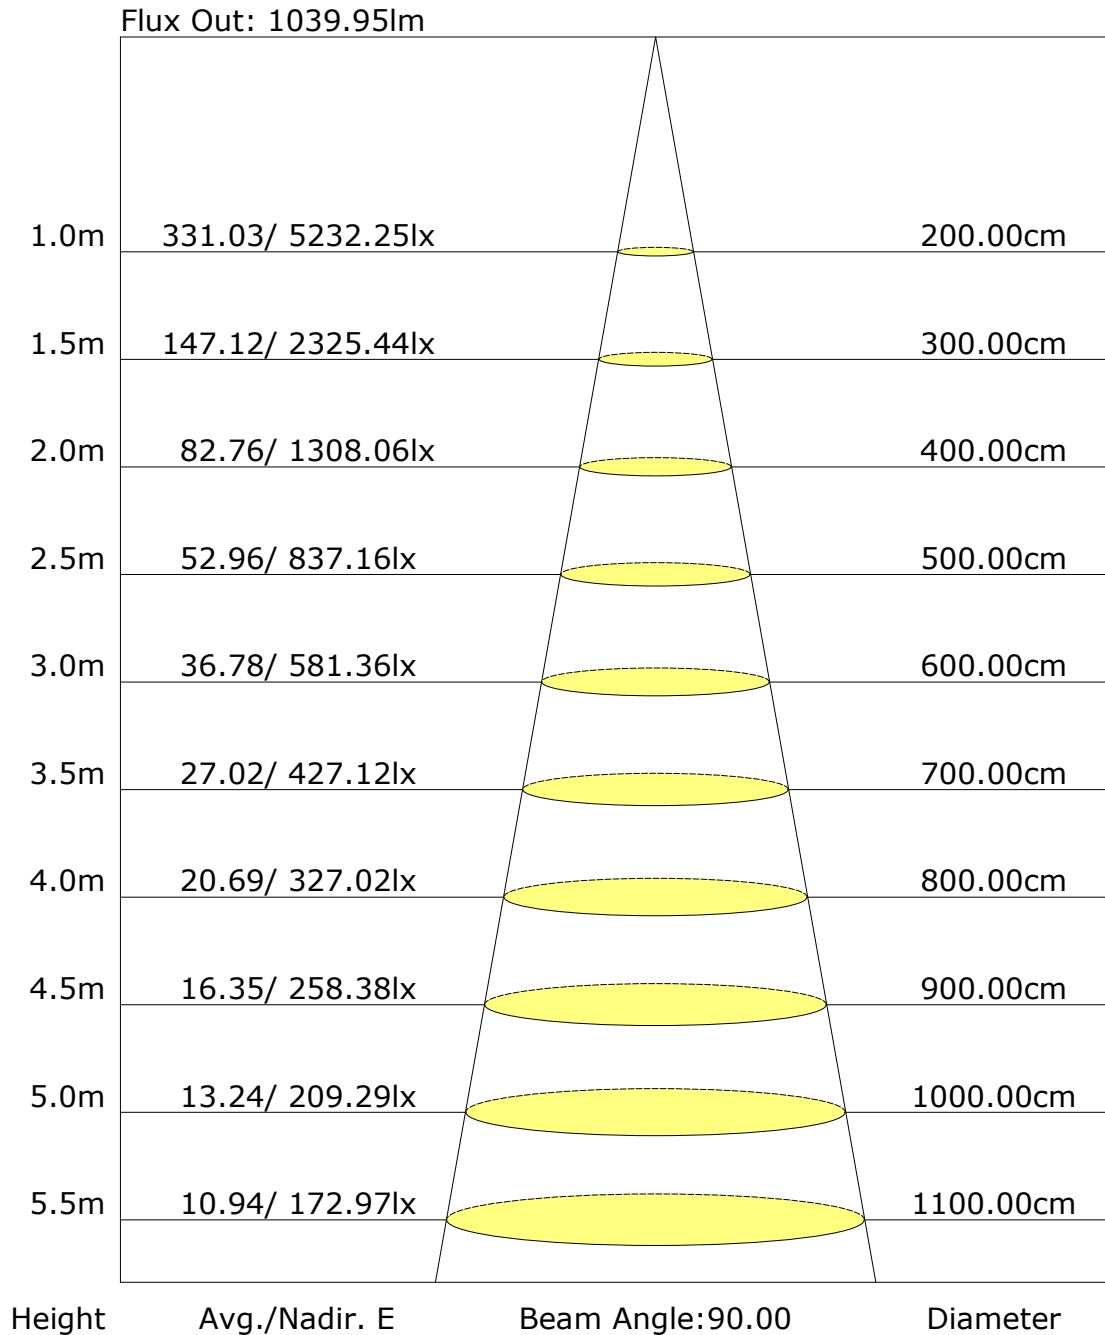

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

[illegible]

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Unit: cd

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector: