




AXORA | ADAPT Series LED Recessed Downlight

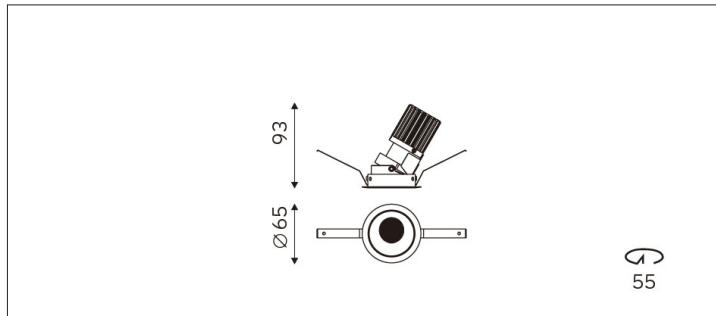

Light Distribution	AX-DL-AD-10W-055	
Colour Temperature	2700/3000/3500/4000K	
Colour Rendition Index	CRI 90	
Optics	Lens	
Beam Angle	15D/23D/35D/51D	
Cut Out	55mm	
Connected Load	10W	
Luminous Flux Of The Luminaire	620lm	
Luminaire Efficacy	62lm/W	
Colour Deviation	SDCM<5	
Light Source	LED	
LED Type	COB	
Dimming Method	Triac/0-10V/ Dali	
Cover Material	Aluminum	
Body Material	Aluminum	
IP Rating	IP20	
Housing Colour	Sandy White/ Sandy Black	
Weight	0.3Kg	
Technical Region	220-240V 50/60Hz	

Light Beam Table		
H(m)	E(lx)	D(m)
1.0	3221.67	0.40
2.0	805.42	0.81
3.0	357.96	1.21
4.0	201.35	1.61
5.0	128.87	2.02

This recessed LED downlight is perfect for accent lighting in showrooms, galleries, museums, brand display areas, and designer studios. Available in multiple beam angles and color temperatures (2700K/3000K/4000K), it provides precise lighting control to enhance the display effect and highlight featured areas.